



[CAD-CAM solutions]

YOUR DIGITAL DENTAL PARTNER





DYNAMIC ABUTMENT® SOLUTIONS

VIRGINIA WOOLF, 17 · 25005 · LLEIDA (SPAIN)
INTERNATIONAL +34 973 289 580
das@dynamicabutment.com

SPAIN +34 973 289 580
spain@dynamicabutment.com

Dynamic Abutment® Solutions is the trademark of the manufacturer Talladium España S.L

The information included in this catalogue is exclusively addressed to professionals in dental sector.

All commercial trademarks mentioned herein are fully registered by their respective companies, and the images that appear are just to provide an orientation.
Talladium reserves the right to modify this document without previous notice.
Talladium is not responsible for the inadequate execution of these products if the warning indications corresponding to every reference are not contemplated.

All of the products listed in this brochure are marking in accordance with CE legislation. Some of the products are not authorized for sale and distribution or do not have a sales license in some countries according to other legislations (FDA, CMDCAS, etc.) Please ask for information: das@dynamicabutment.com

 *Marking in accordance with CE legislation and applicable sanitary regulations*



Visit our Online Store to find all our products and compatibilities :

www.dynamicabutmentstore.com

4	DYNAMIC ABUTMENT® SOLUTIONS	30	DAS LIBRARIES
5	RESEARCH & DEVELOPMENT	32	DAS CUSTOMIZED SERVICES
6	QUALITY CENTER	34	IMPLANT PLANNING
7	INTERNATIONAL CUSTOMER SERVICE	35	CAD-CAM
8	DYNAMIC SYSTEM	39	DYNAMIC SYSTEM - LIST OF COMPATIBILITES
10	DYNAMIC SYSTEM FOR MILLING STRUCTURES	40	DYNAMIC SYSTEM COMPATIBILITES
12	CADCAM WORKFLOW - DAS PRODUCTS	186	DYNAMIC SCREWS TECHNICAL SPECIFICATIONS
14	DYNAMIC μSCANBODY/ ADAPTOR	189	DYNAMIC SCREWDRIVER & DYNAMIC SCREWS
16	LAB SCANBODY	190	STRAIGHT SCREWS TECHNICAL SPECIFICATIONS
17	SCANALOG	193	SCREWDRIVERS & STRAIGHT SCREWS
18	DYNAMIC TIBASE®/DYNAMIC 3TIBASE®	194	DYNAMIC SYSTEM SCANBODIES COLORS
20	DYNAMIC TIBASE® GINGIVAL OPTIONS		ACCCORDING TO COMPATIBILITY
22	DYNAMIC PREMILL 3D®/ADAPTORS	198	DYNAMIC MILLING TOOL SPECIFICATIONS
24	DYNAMIC MILLING TOOL - DMTONE®	200	SCREWDRIVER ADAPTOR/COMPLEMENTS
26	DIGITAL ANALOG	201	IDENTIFICATION PRODUCT/ SECURITY & TRACEABILITY
26	TIBASE® VALIDATION PATTERN	202	TALLADIUM GUARANTEE
29	DIGITAL ANALOG VALIDATION PATTERN		

DYNAMIC ABUTMENT® SOLUTIONS

YOUR DIGITAL DENTAL PARTNER

The digital transformation of your company is an essential process for the future of your clinic or laboratory. Adapting to the new technologies, required by this new workflow, is not easy and requires a great effort in terms of both investment and know-how, which involves a detailed planning. Dynamic Abutment Solutions offers you its experience in multiple implementations to offer you a wide range of personalized services for the development of such project, as well as the manufacturing of customized products to adapt to your work protocol.

All Dynamic Abutment Solutions' custom-developed products have the necessary technological support for their correct introduction into the medical device market in accordance with current standards.

We assist you in all the stages of the digital flow in order your work reaches the level of excellence you want; from the initial scanning process to the completion of the prosthetic restoration.

Undoubtedly, DAS is your **digital dental partner**.

RESEARCH & DEVELOPMENT

"Focus on excellence and R&D&I has seen us become No.1 in angled solutions"

The R&D&I Department at Dynamic Abutment® Solutions is endorsed by the UNE 166002 certificate for R&D&I systems management.

It is actively involved in international projects, working alongside the main operators in the sector, contributing know-how in both production and machining and the design of digital hardware for CAD and production management (CAM).

Consequent to this work with the leading figures and companies in the sector, we develop new products that are rolled out from our own Production Center. The Production Center features next-gen equipment, enabling us to make prototypes prior to receiving the final thumbs-up for the product from the R&D&I Department.

The R&D&I Center ensures comprehensive control over all the development stages for new projects, allowing them to be transformed into new products featuring the top-notch safety and quality levels that characterise our output and reaching our clients as soon as possible.



QUALITY CENTER

「 "Controlling our quality process ensures the safety of our products" 」

Dynamic Abutment® Solutions has a Quality Center with the very latest metrology and control, prototyping and physical-chemical treatment equipment, and sanitary areas for refitting and packaging health products in an ISO-8 clean room.

Controlling the whole quality process ensures that our products are measured, inspected and checked using the most advanced control methods in the sector. We guarantee the quality of our products from production all the way through to packaging.

Being present in international markets means we have the mandatory health certificates that cover our product:

CE marking, CMD/CAS regulations, or FDA certificates, among others.

Our primary concern from the very beginning has been the quality and safety of our products: UNE-EN ISO 9001:2015, UNE-EN ISO 13485:2016, and UNE 166002:2014.



INTERNACIONAL CUSTOMER CENTER

「 "Our experience and know-how serving our clients and distributors" 」

The main objective of the exclusive Dynamic Abutment® Solutions Customer Service Center is to maintain a constant channel of communication with our distributors and associates.

Our products are available in over 45 countries across five continents, with guaranteed health product management and certificates for international markets.





We offer our clients technical support, along with immediate answers and solutions with direct support from the R&D&I technical department for even the most complex of cases.

We participate in fairs, events, conferences and training sessions through our distributors and associates.



Direct contact with and suggestions from our clients allows us to continue improving the quality of the products and services we offer.

DYNAMIC SYSTEM

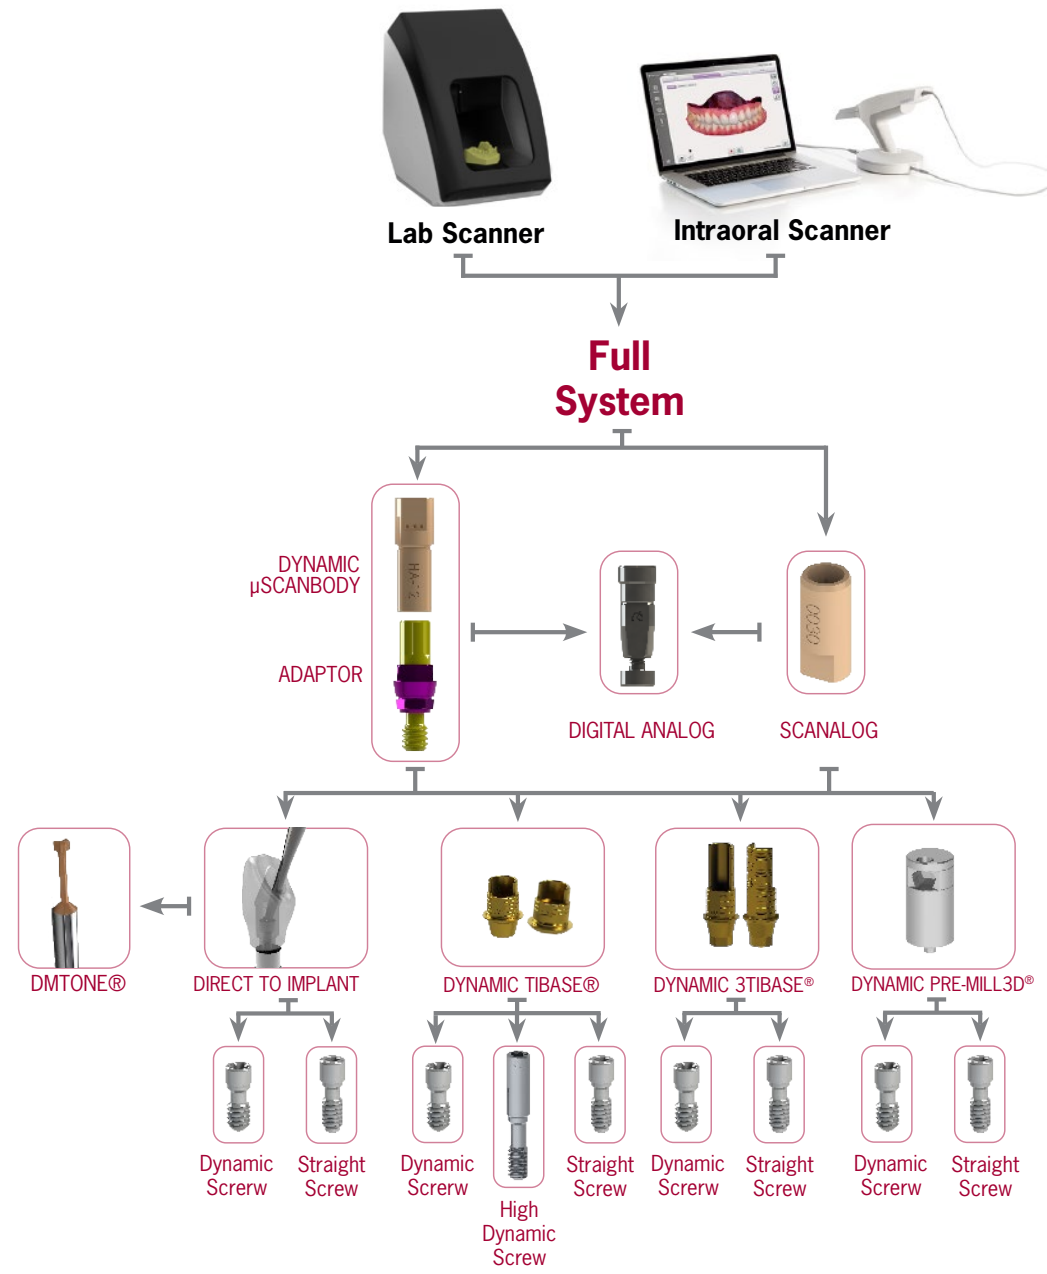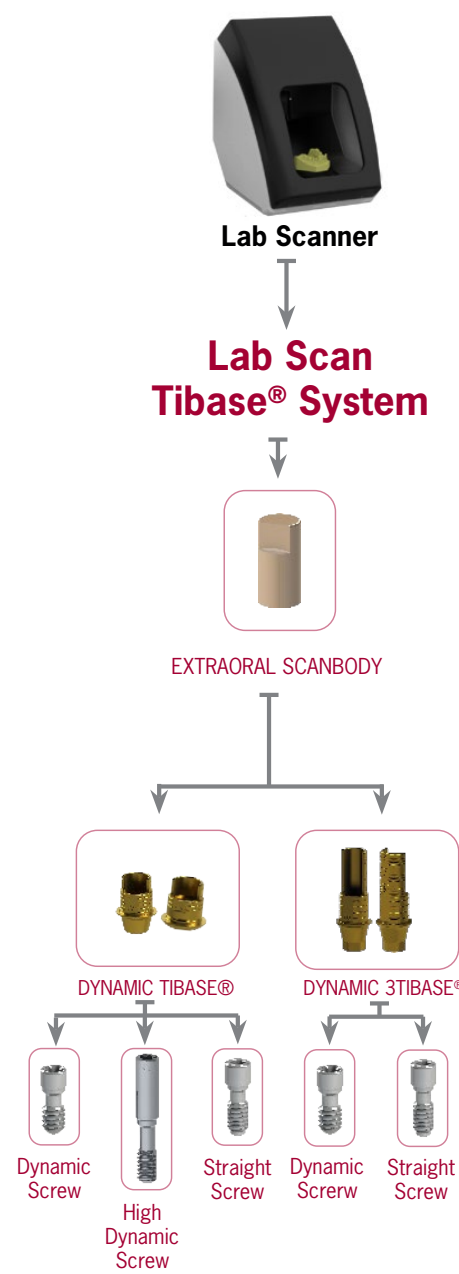

DYNAMIC SYSTEM for MILLING STRUCTURES

The Screwdriver set of 3.0 Dynamic Abutment® System is used in those cases in which rectification of the entry of the screw due to an unfavorable position of the implants is necessary, improving the functionality and aesthetics of the milled prosthesis.

More than 500.000 cases resolved with
DYNAMIC SYSTEM



PATENT NUMBER
Dynamic Screwdriver
EP 3 260 079

Dynamic Screwdriver

Screwdriver with hexalobular head, exclusively to the 3.0 Dynamic Abutment® system.

Lengths: 18, 24, 32mm.



Our screwdriver has a contra-angle connection to make it easier to use with a dynamometer or manual ratchet, with the corresponding adaptors or handles.

Dynamic Screw

PATENT NUMBER
Dynamic Screw
US 2020/15942

High Dynamic Screw


Dynamic screws cover the majority of the thread metrics available on the market. They are used with the Dynamic TiBase® or milled structures with an angled screw channel. There are several lengths for each metric to ease adaptation to the structures.

All of them are made of Titanium grade V.

All screws are perfectly identified with their batch and reference numbers, which allow each and every screw to be traced and recorded in the patient's card and in the clinical or laboratory records. Only the 3.0 dynamic screwdriver must be used to install them.

DAS PRODUCTS

CAD-CAM WORKFLOW

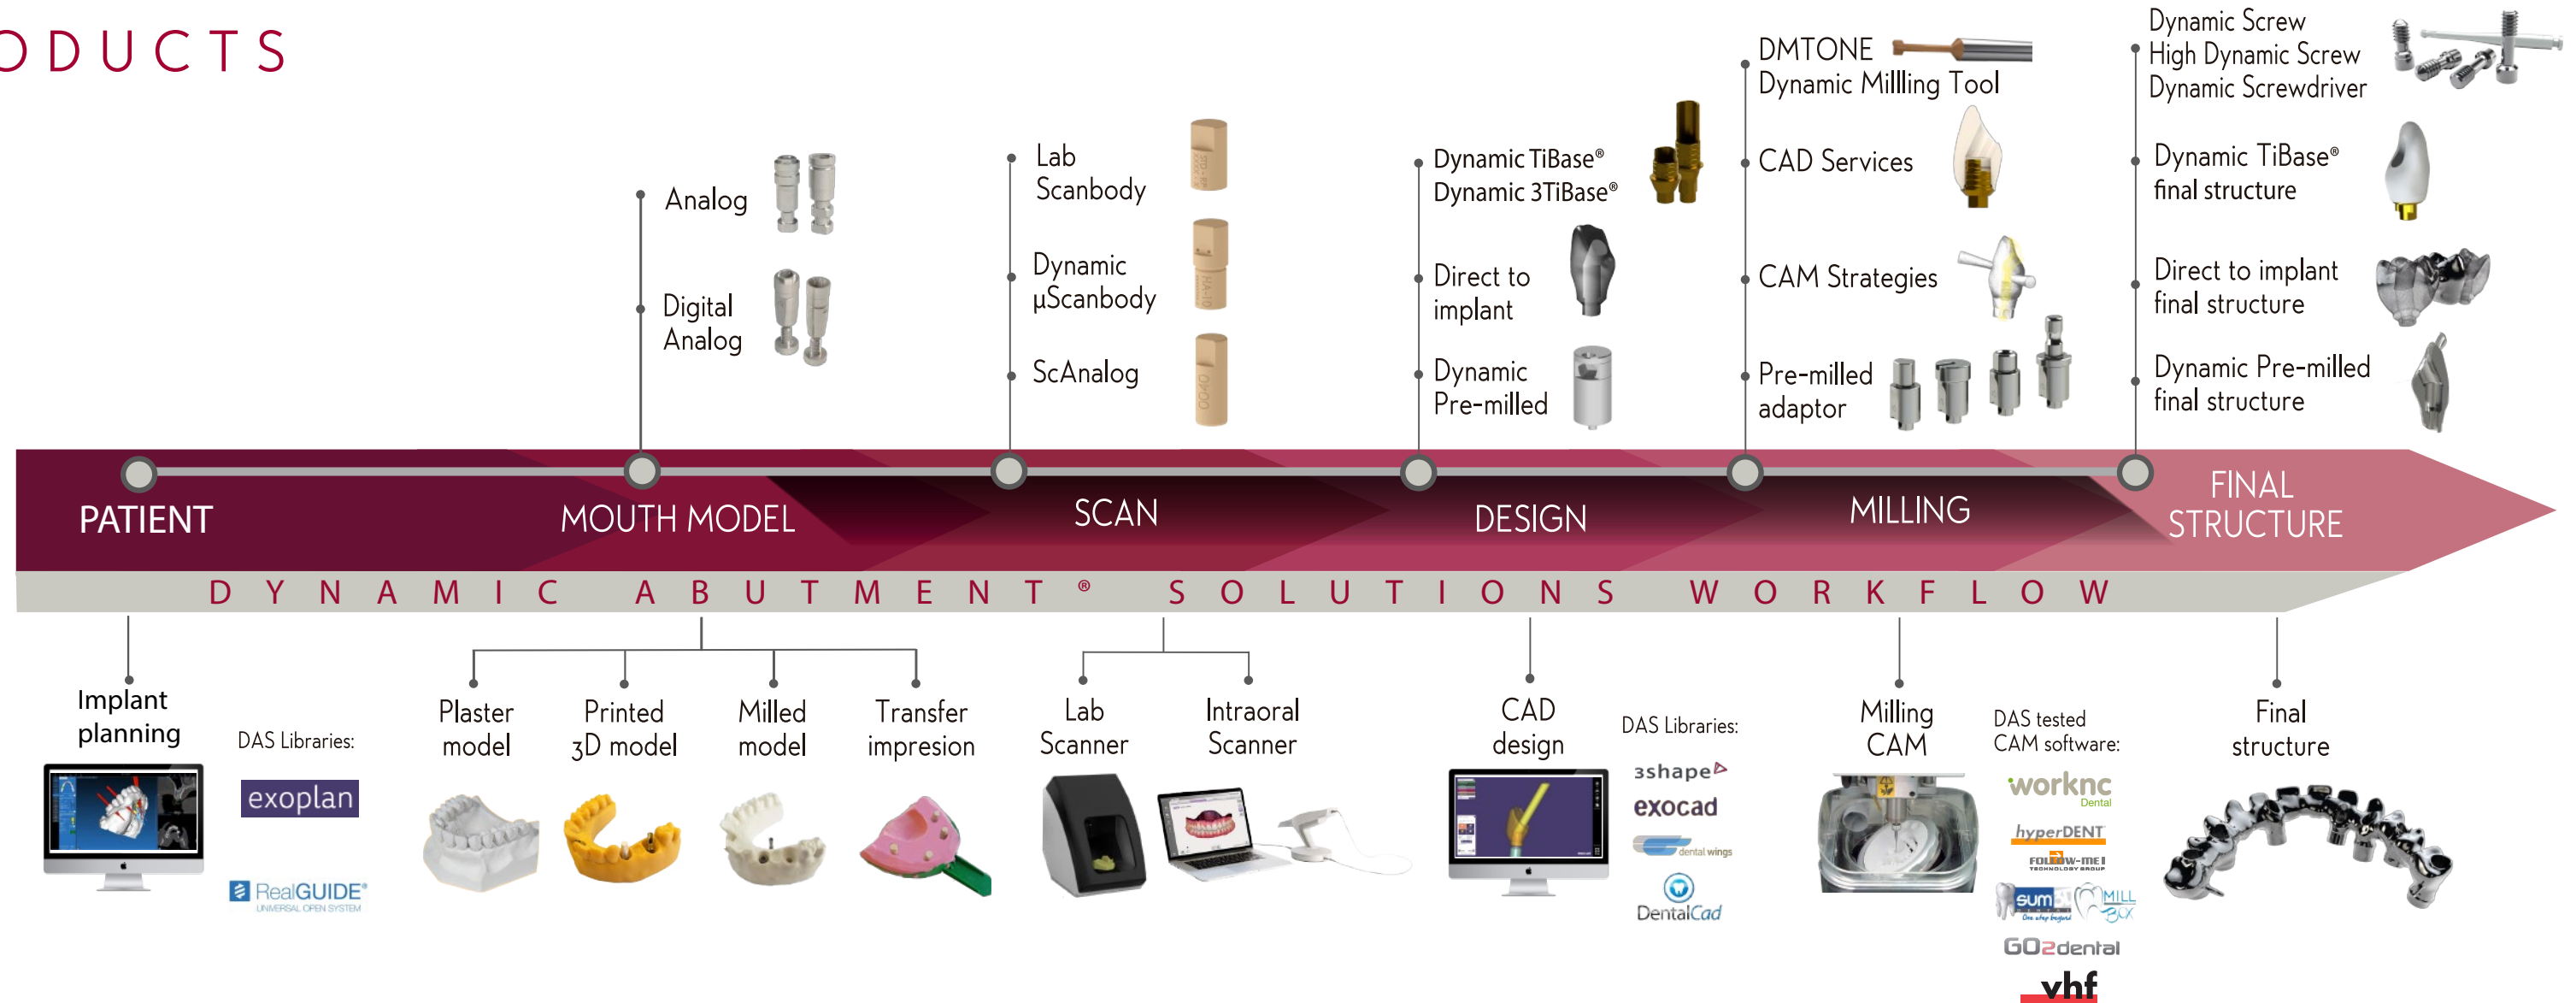


DYNAMIC μSCANBODY

The scanbody detects the position and orientation of the respective dental implant or analog in CAD-CAM scanning procedures.

Hole free scanbody and not screwed

There are no holes in the upper section which means the Z axis is free to improve scanbody scanning.


The angulation of the chimney it goes always on the opposite side of the scanbody lateral cut.

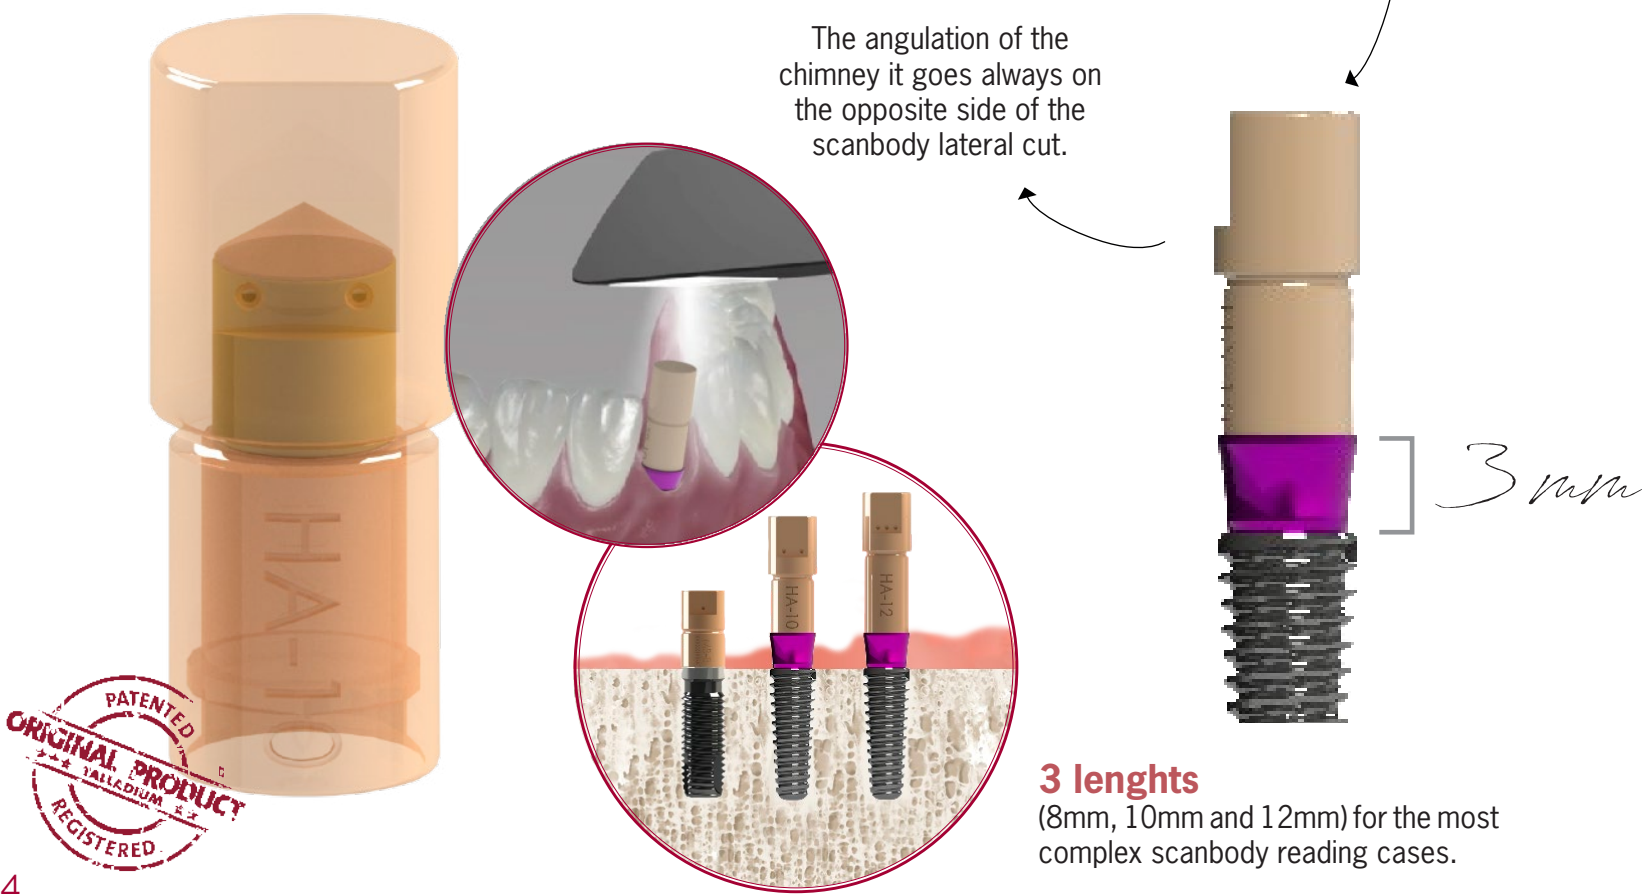

3 lenghts
(8mm, 10mm and 12mm) for the most complex scanbody reading cases.

ADAPTOR

Fastened to an adaptor using a magnet

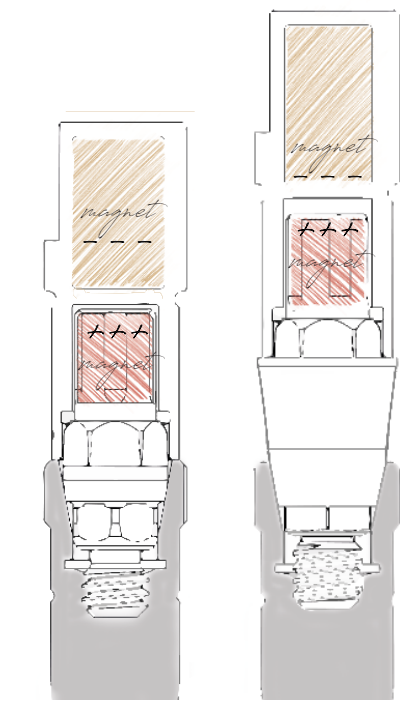


OPTION 1
library
DAS_I_XXXX

OPTION 2
library*
DAS_IG_XXXX

*Use IG Library code with the 3mm adaptor

Connecting element between the scanbody and the implant. Marked with different colors according to the compatibility*

*See pages 186 to 189

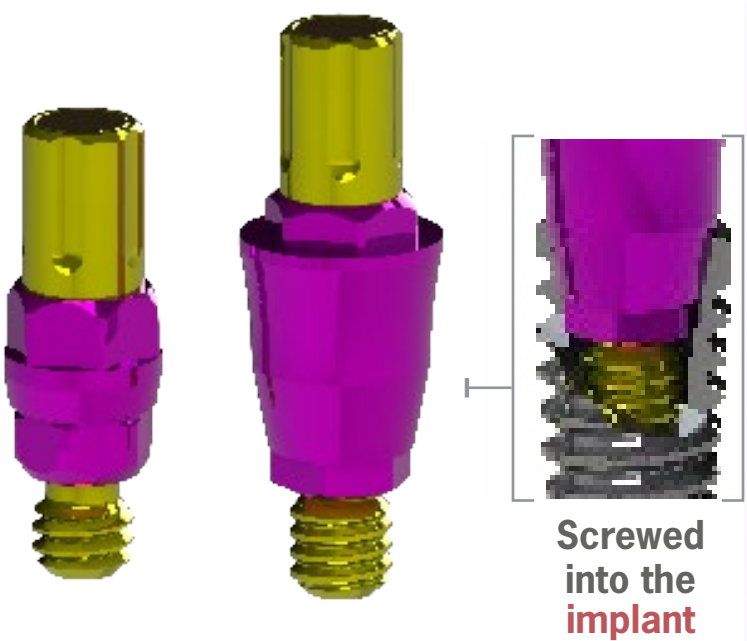

Special screwdriver for the adaptor*
*See page 192



LAB SCANBODY

Only for Dynamic TiBase®
and Lab Scanner

30.410.006.01-2
for super narrow
platform

30.413.002.01-2
for regular platform

30.415.007.01-2
for super wide platform



30.412.001.01-2
for narrow platform

30.414.003.01-2
for wide platform


30.413.004.01-2
for compatibility 0037



30.414.008.01-2
for compatibilites
0096 and 0137

30.413.005.01-2
for compatibilites 0020, 0025,
0069, 0101, 0150, 0163,
0168 and 0173

Special
scanbodies

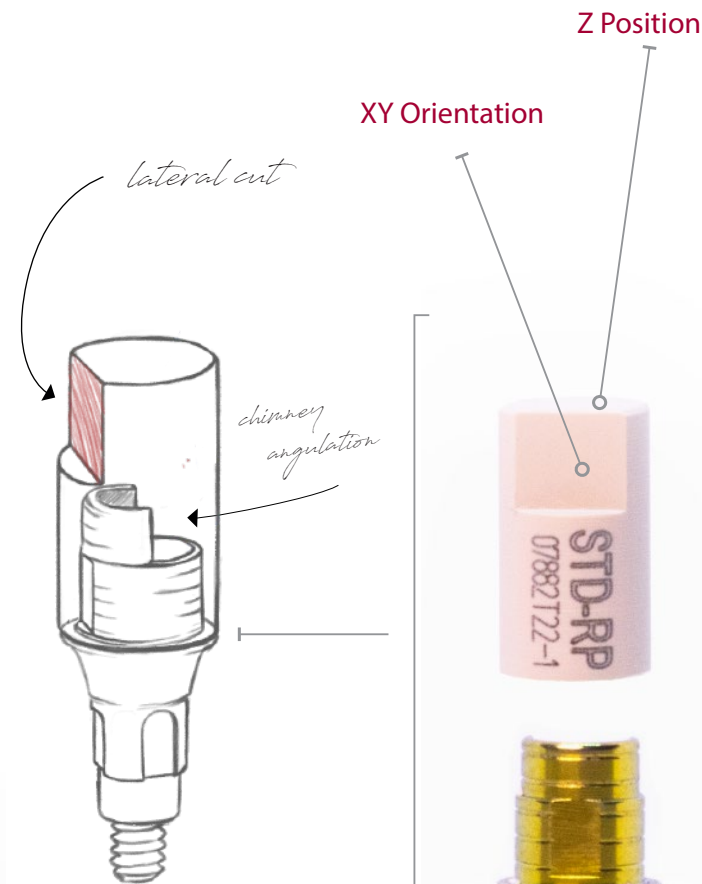

Perfect fit

The angulation of
the chimney it goes
always on the opposite
side of the scanbody
lateral cut.



ScAnalog

Scan directly on the impresion tray



Scanning

Scanning process of the
silicon model with the
ScAnalog placed.

DYNAMIC TIBASE® *

Dynamic TiBases® are a technological contribution to the digital treatment for the angled systems development using CAD-CAM: the Dynamic System includes the Dynamic TiBase®, the dynamic screw-screwdriver set, scanbodies and digital libraries available for the main CAD softwares on the market: Exocad, 3Shape, Dentalwings and Dental Cad.

PATENT NUMBER
Dynamic TiBase®
US 10.130.447

TO CORRECT
ANGULATION

up to
45°



*Maximum angulation available for the first TiBase gingival height. Maximum angulations for the rest of gingival heights under development


Our grade V titanium bases are **gold anodized** to improve the work's aesthetic.

DYNAMIC 3TIBASE®

The Dynamic 3TiBase® offers the possibility to work with different cement heights: 5, 7 or 9mm. It is specially designed for the cases that require higher height. In this way, a greater support surface is achieved, the structure is stronger and more resistant so structure breaks by height decompensation between the TiBase and the structure are avoided.



To achieve the maximum strength of the structure it is important to have the maximum support surface possible.

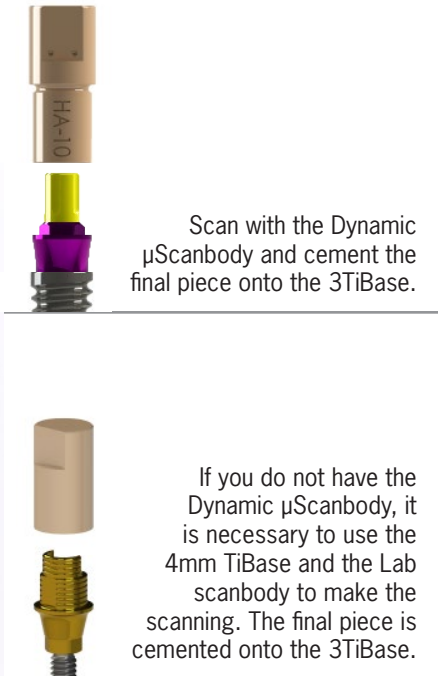


Scan with the Dynamic μScanbody and cement the final piece onto the 3TiBase.

If you do not have the Dynamic μScanbody, it is necessary to use the 4mm TiBase and the Lab scanbody to make the scanning. The final piece is cemented onto the 3TiBase.

DYNAMIC TIBASE®


Gingival options

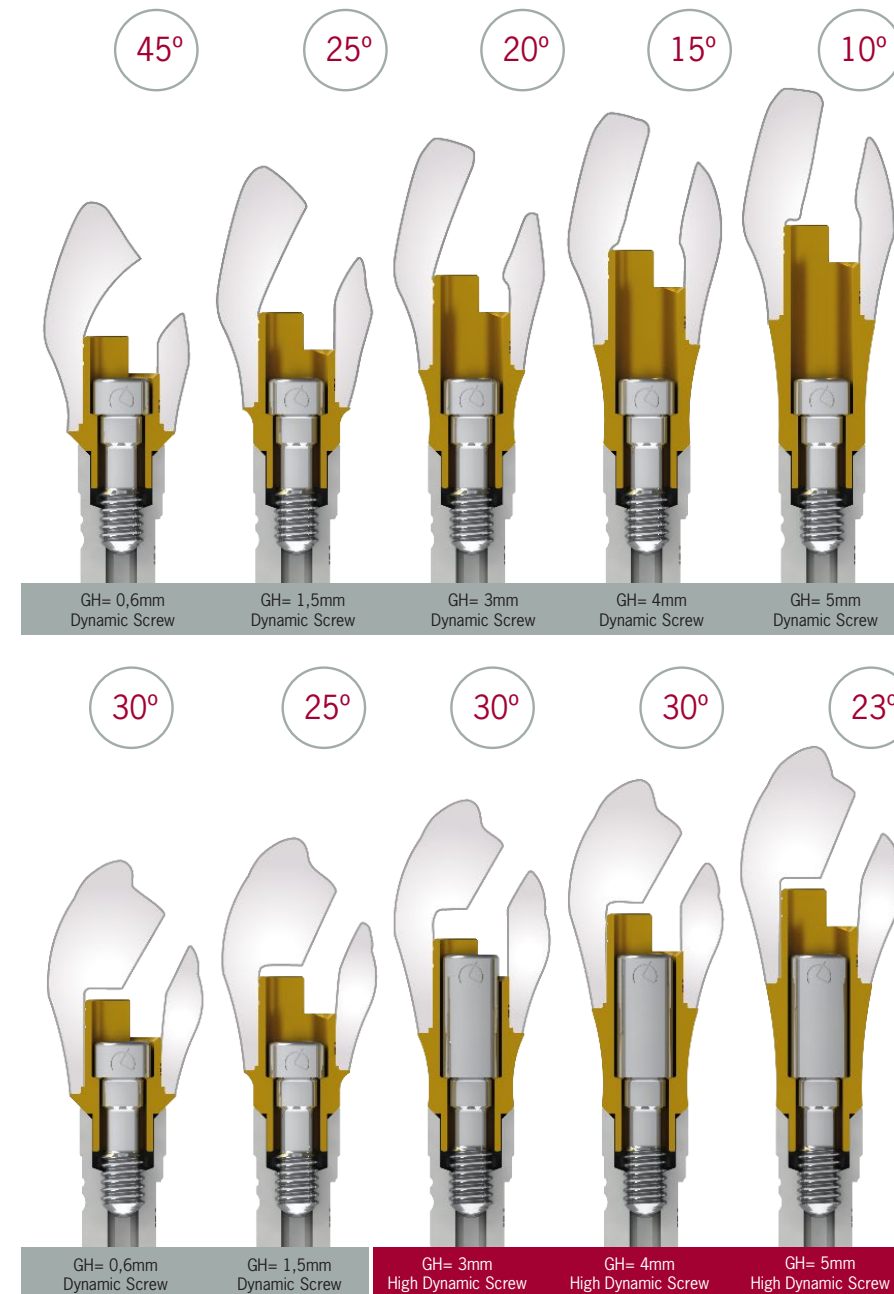


*Example with TiBase® compatible with Zimmer Screw-Vent Ø3,5 (Code 0040)



- Keep the angulation
 - Best aesthetic angled channel Ø 2mm
 - Angled channel reduction of 32%
 - Increases the volume of the structure
 - Captive Screw
- (Put the screw on the TiBase® before cementing)

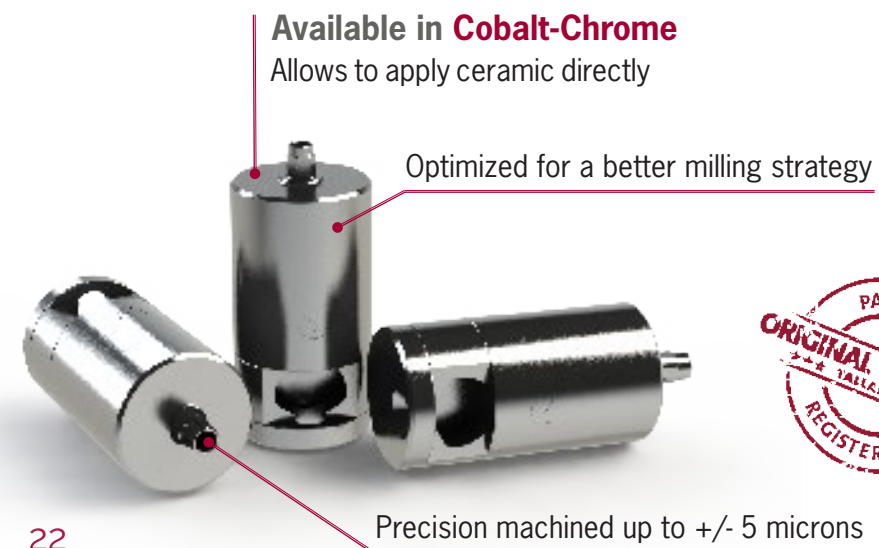


DYNAMIC PRE-MILL3D®



Pre-milled angled channel

The Dynamic Premill3d® already comes with a pre-milling of the inner channel



Angulation from 0 to 30° choice

Allows to choose angulation of the screw channel on the CAD for the later insertion of the screw




Milling of the angulated screw channel

CAD design and milling of the angled channel on CAM by the customer



Dynamic Pre-milled final structure

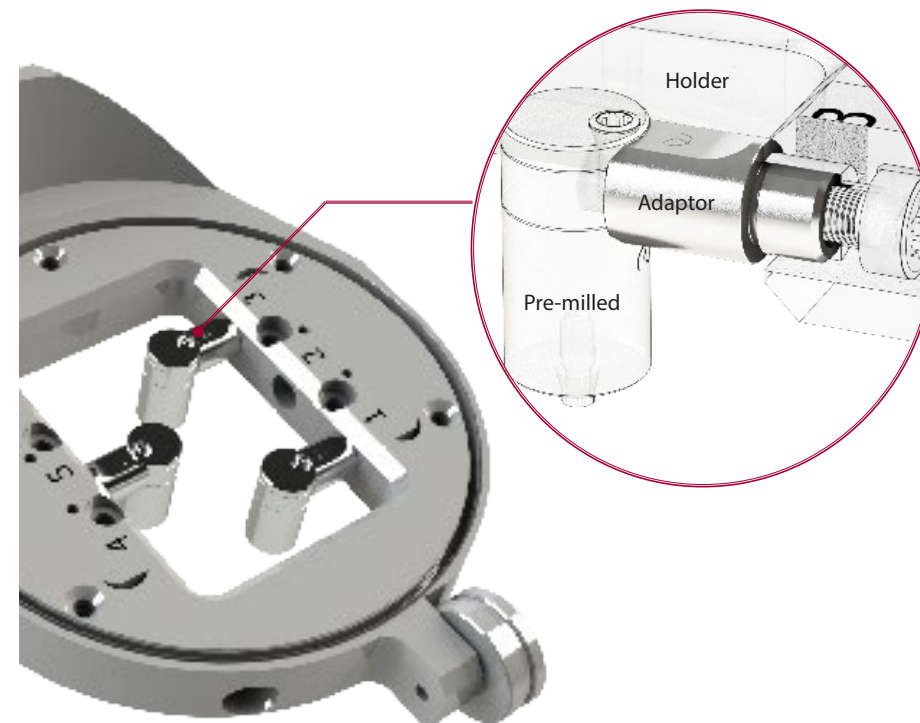


ADAPTORS



It is not necessary to purchase a new holder

The adapter has the holder connection and connects the holder to the pre-milled abutment.

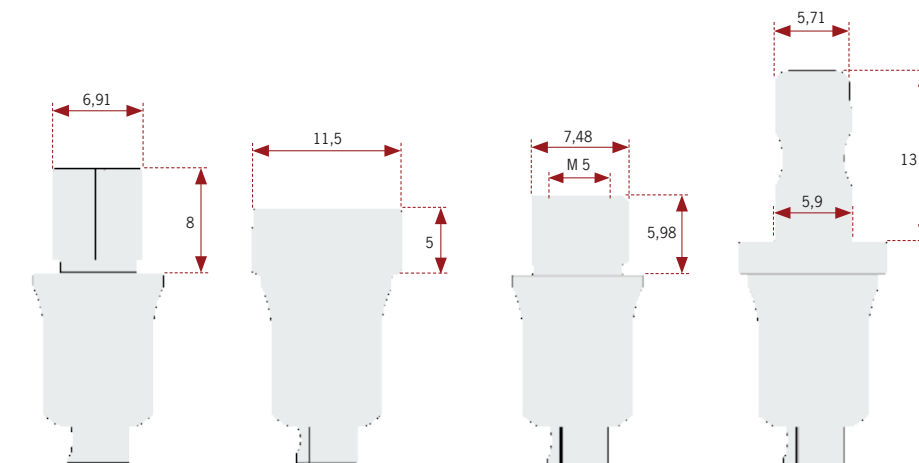


Customized ADAPTORS

We design and manufacture the adapter for any type of holder
(das@dynamicabutment.com)

DYNAMIC MILLING TOOL

Each tool is compatible depending on **screw seating, metric and length**

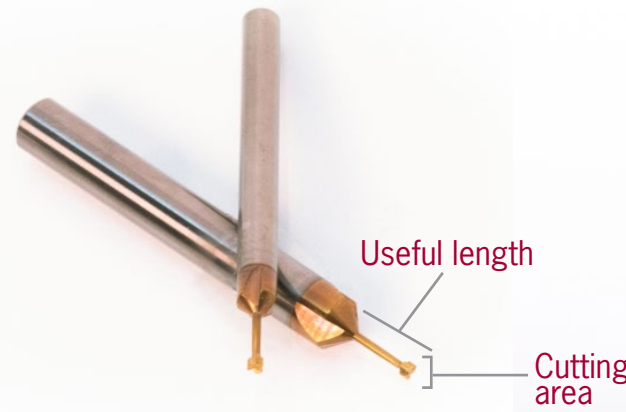

Shank
Ø3, Ø4, Ø6





DMTONE
DYNAMIC MILLING TOOL

DMTONE
DYNAMIC MILLING TOOL

DIRECT TO IMPLANT (one piece) and ANGULATED

Precision milling tool. In the screwed angled structure direct to implant, it is used to mill the screw seating and to increase the internal diameter of the straight channel.


There are 3 cutting wing-tips with 3 different cutting area each, to mill the screw seating and to increase the internal diameter of the straight channel.

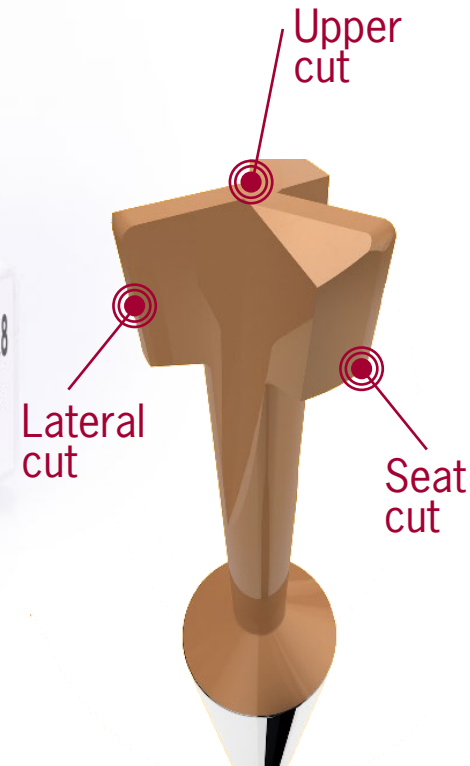


STEP 1:
Crown with pre drill.



STEP 2:
Crown with Angled channel.



STEP 3:
Crown with Dynamic Milling Tool.
Milling the screw seat and increasing the diameter of the straight channel.

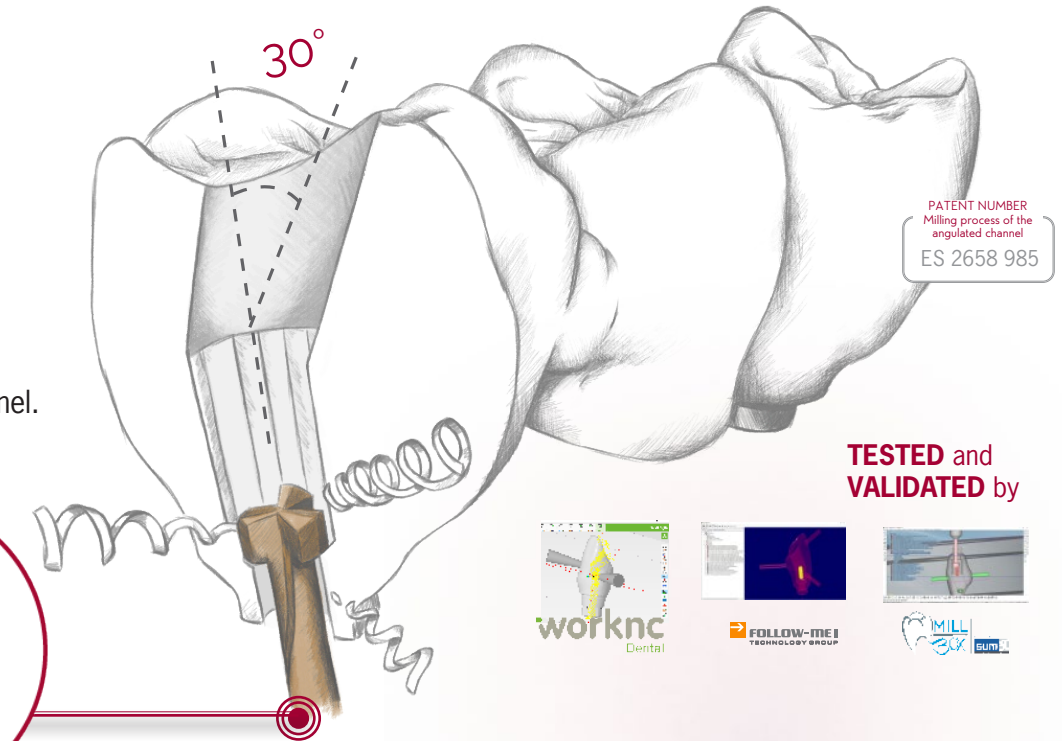


**TESTED and
VALIDATED by**

If it is required to validate the internal geometry of the channel there are special green validation screws that are manufactured with a head diameter and length greater than the nominal one.

VALIDATION DYNAMIC SCREW

*Direct to implant maximum angulation under development

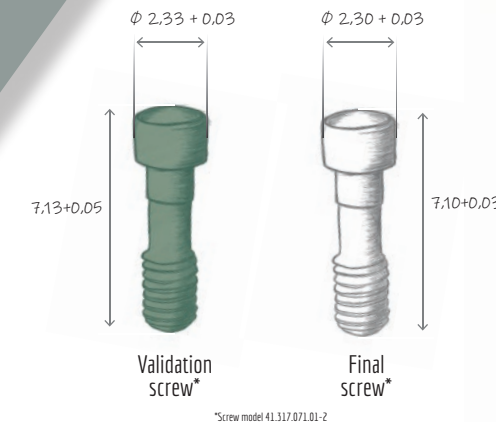

DIGITAL ANALOG


Digital analog of the dental implant to simulate implant position in a 3D printed dental model.



3shape
Model Builder



exocad
Model Creator




dental wings
Model Builder


3D PRINTED MODEL

The dental model - for later insertion of the analogs - is designed using the CAD libraries.



Concave notch
Top precision in longitudinal position



Curved Surface
Accuracy of orientation guaranteed



Longitudinal cut
Longitudinal cut to avoid rotation X-Y

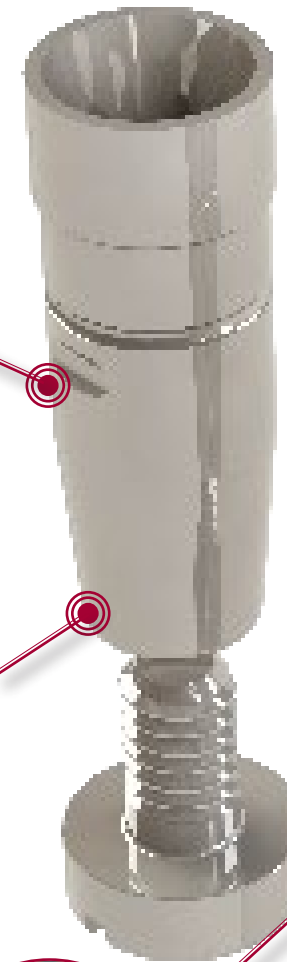


Screwed fastening
Prevents the analog from moving in Z



TIBASE VALIDATION PATTERN


The validation pattern for Ti-Base is an .stl file that contains different cement gaps between the Ti-Base and the material, ranging from 50 microns -which comes by default in the library- to values of 10, 20, 30, 40, 60, 70 and 80 microns.

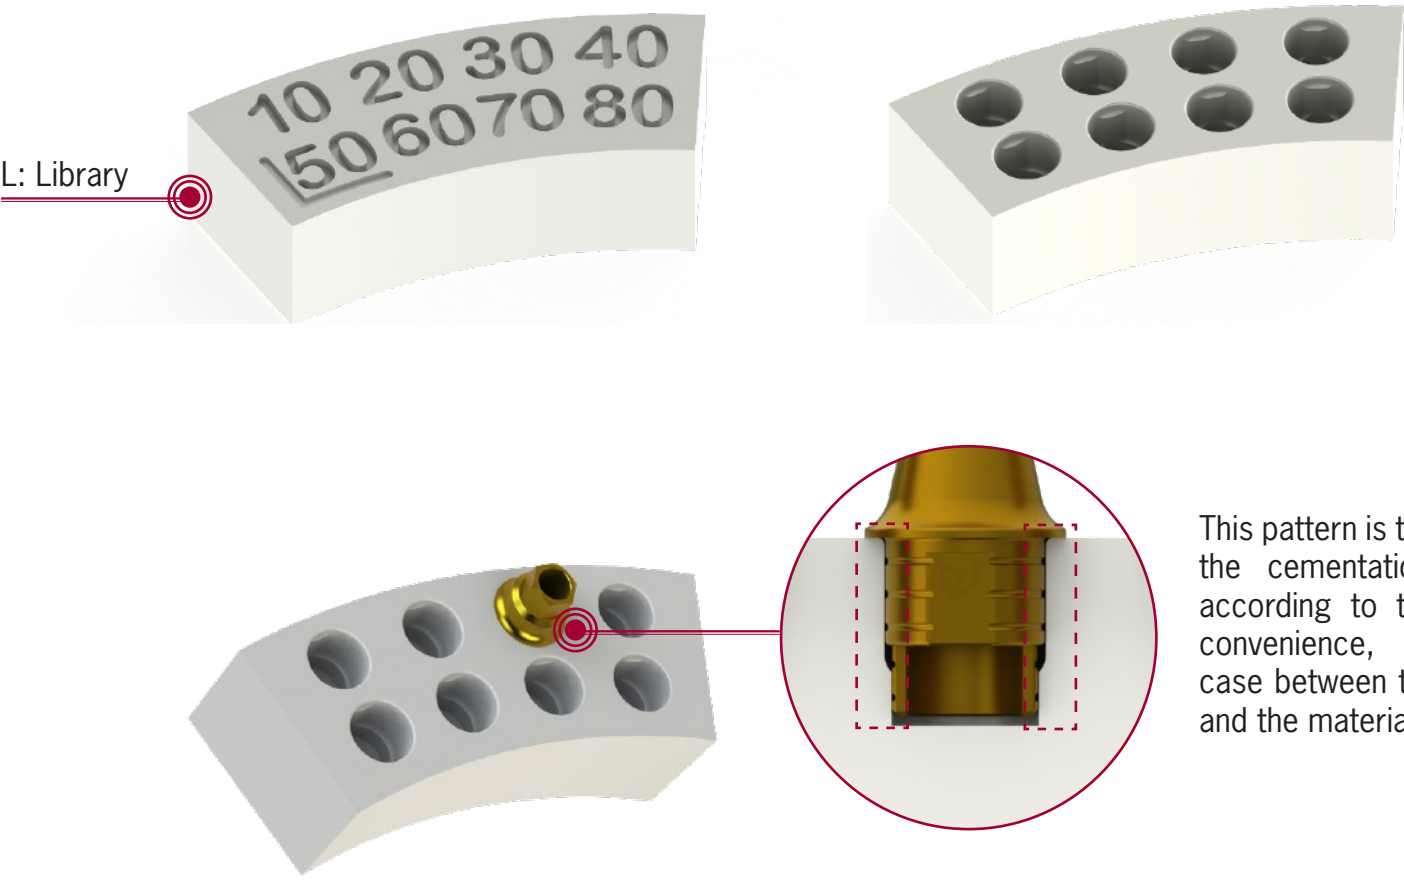

This pattern is to establish the cementation space, according to the client's convenience, for each case between the Ti-Base and the material.



DIGITAL ANALOG VALIDATION PATTERN

The validation pattern for digital analogs is a .stl file that contains different printing gaps between the Digital Analog and the printing material, ranging from 30 microns -which comes by default in the library- to values of -10, 10, 50 and 70 microns.

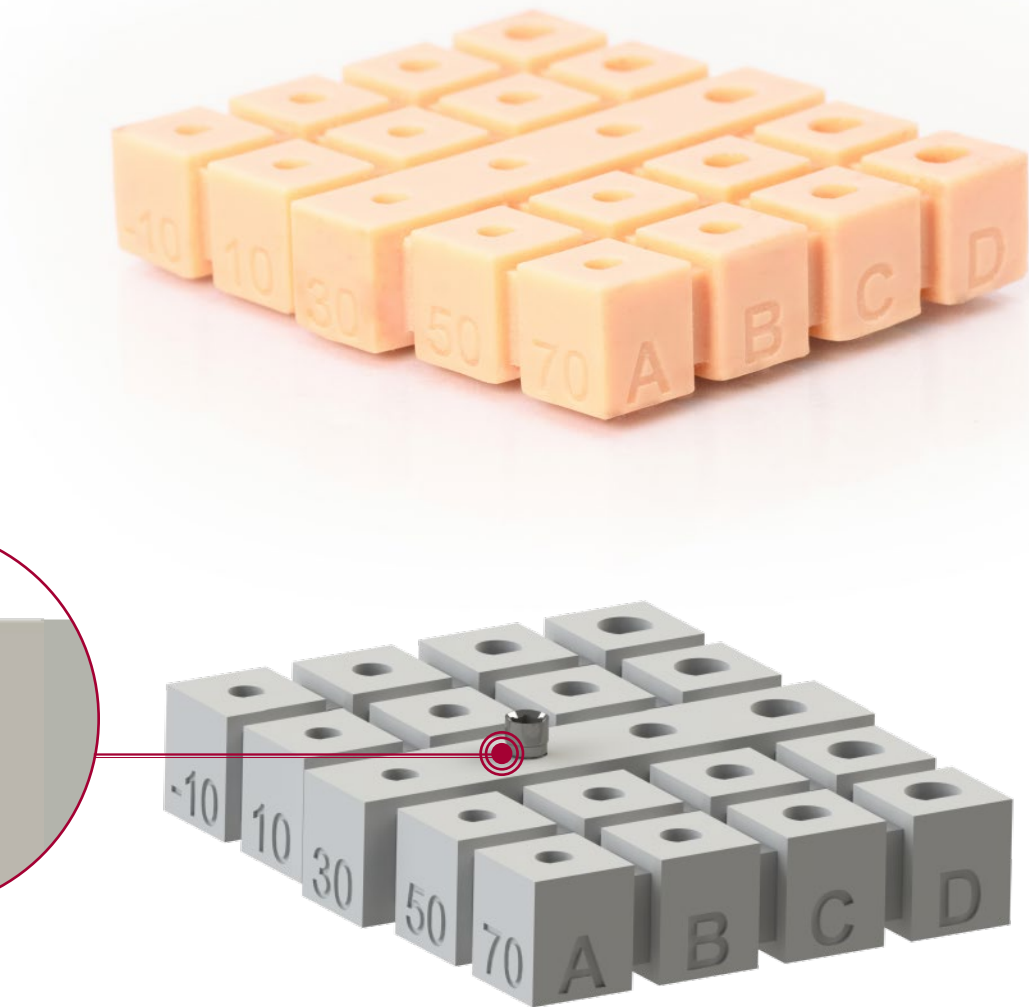

This pattern is used to know which is the ideal gap for the printer being used.

DAS LIBRARIES

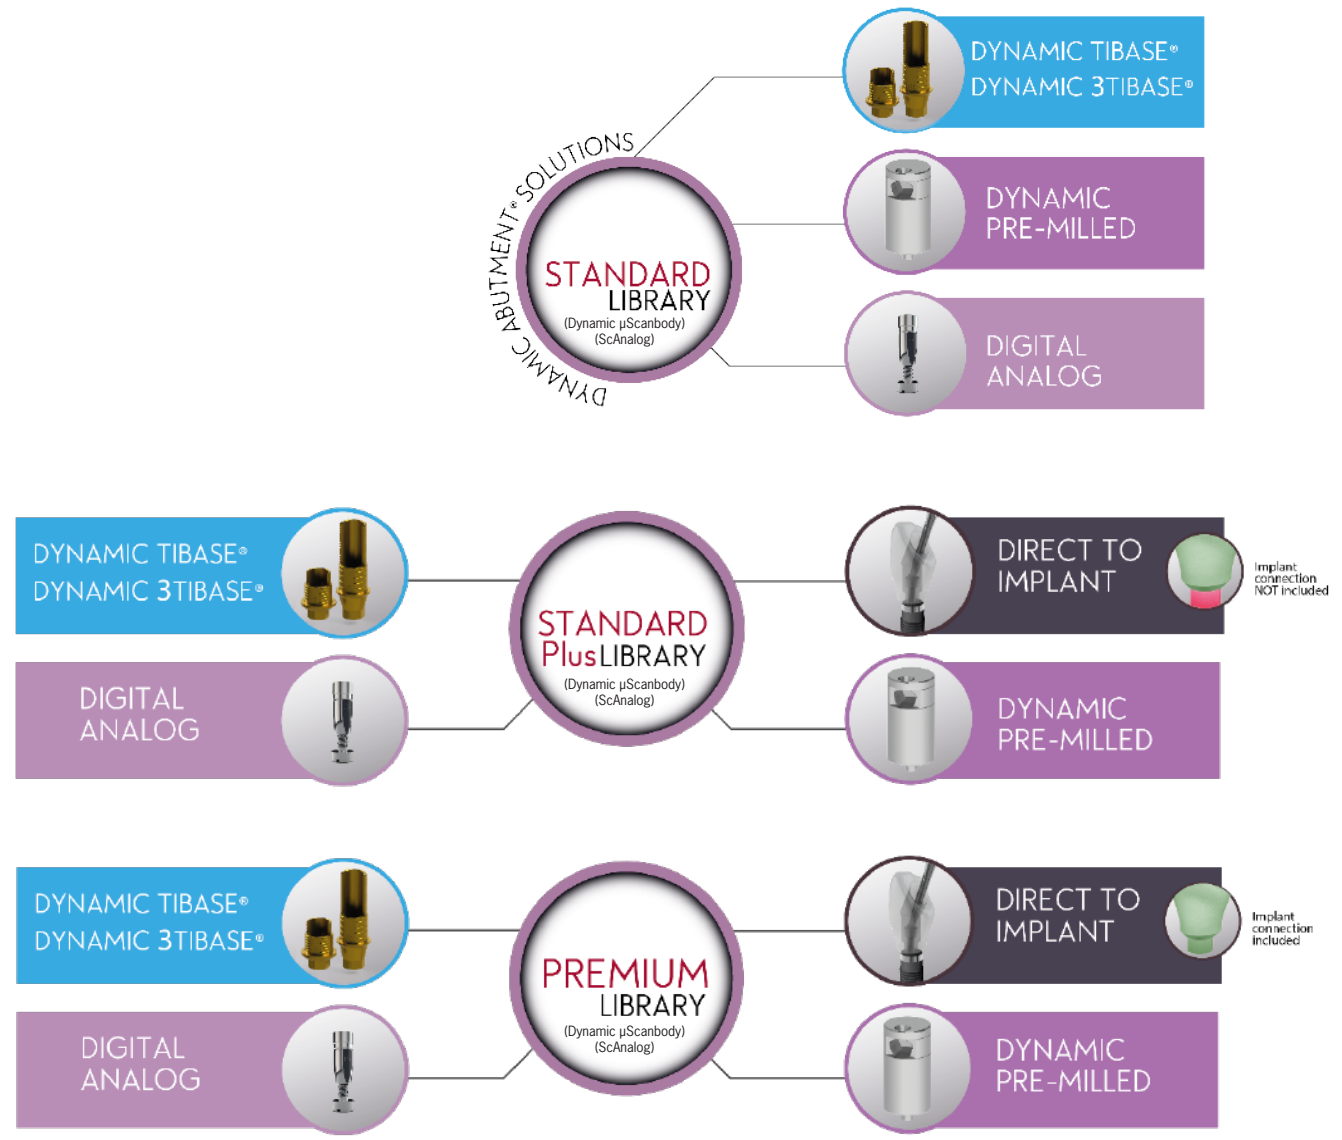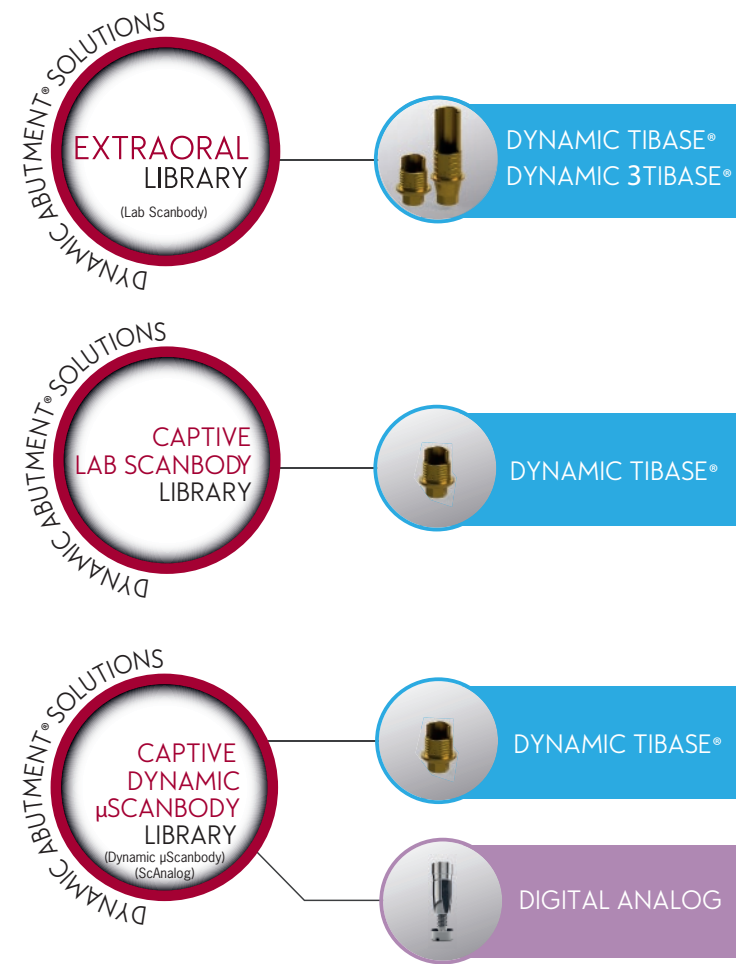


YOUR DIGITAL DENTAL PARTNER

DAS customize services

PRODUCT DEVELOPMENT


Any DAS traded goods can be made-to-measure or adapted to your work protocol. DAS complements the development of new products with the technological support (software, libraries, tools, etc.) necessary, alongside all the guarantees any healthcare product needs.

CAD ADAPTION SERVICES

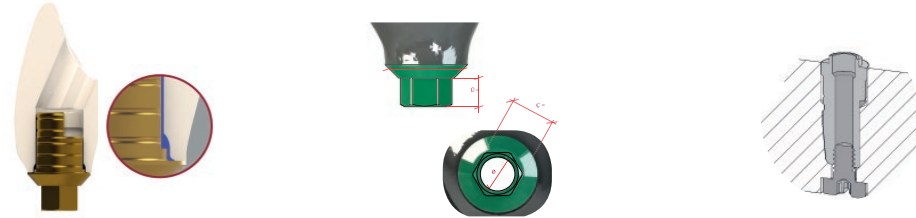

- ✳ Adjustment of the CAD libraries for our products to client needs: angled channel diameter modification, calibration of cemented gap TiBase®, adjustment of 3D digital analog printing gap, etc.
- ✳ CAD libraries supplied with implant connections; DAS currently has over 500 implant compatibilities.
- ✳ Development of special CAD libraries for connections pertaining to the client.
- ✳ Design of libraries linked to client's specific scanbodies.
- ✳ Etc.

CAM SUPPORT and ADVICE

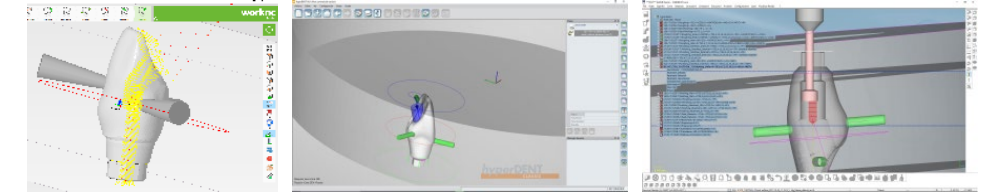

Dynamic Abutment® Solutions products have been tested and validated by the leading CAM software brands on the market.


- ✳ Provision of implant connections with nominal values.
- ✳ Design and production of special tools to mill connections or special geometries (abutments).
- ✳ Design and production of special supports for your milling equipment: pre-milled supports, etc.
- ✳ Technology for machining angled channels (copyright-free).

SPECIALIZED CONSULTANCY




Multidisciplinary experience in different areas of dental research and regular collaboration on projects with the key operators in the sector have provided us with experience and know-how that we want to make available to you, so we can advise you, work together and pursue customized projects. All DAS technological and human resources are available to help turn your idea into a reality, providing expert advice and support throughout all the developmental stages.

IMPLANT PLANNING

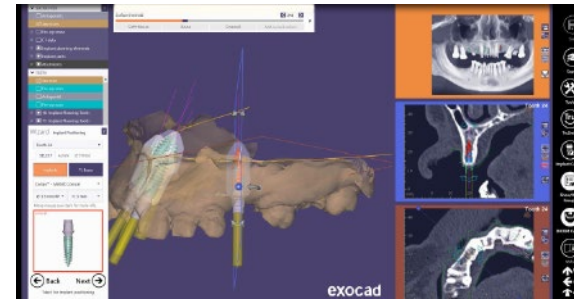

exoplan

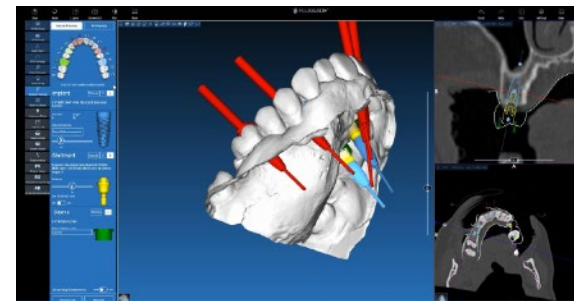


3DIEMME
BIOIMAGING TECHNOLOGIES



RealGUIDE
UNIVERSAL OPEN SYSTEM

DYNAMIC TIBASE[®]


CAD




3shape



exocad








dental wings



DentalCad

CAM



Tested CAM
Software

worknc
Dental


FOLLOW-ME I
TECHNOLOGY GROUP

MILL BOX
sum


GO2dental
cam for dental labs

vhf

DIRECT to IMPLANT

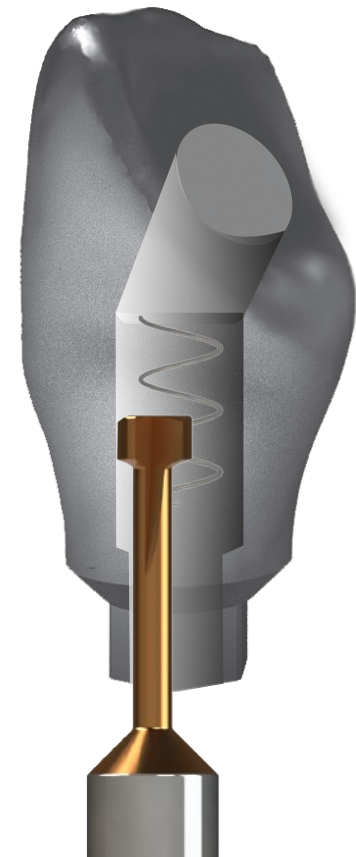

CAD

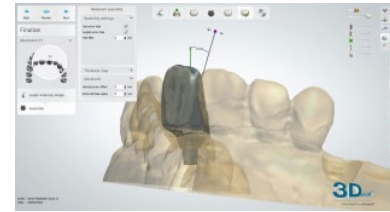

3shape




exocad




dental wings


CAM



worknc
Dental



FOLLOW-ME!
TECHNOLOGY GROUP



MILL
BOX
sum


DIGITAL ANALOG




CAD-CAM



3shape
Model Builder

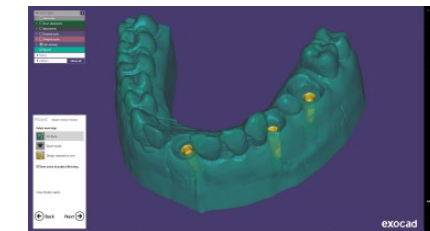

exocad
Model Creator

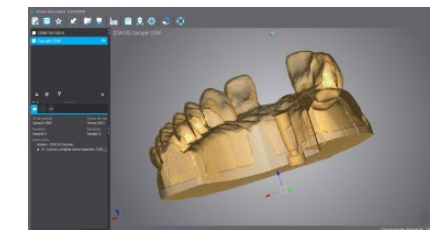


dental wings
Model Builder

DYNAMIC PRE-MILL 3D®




CAD

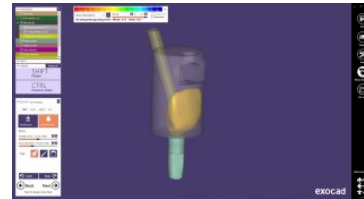

exocad




3shape




dental wings

CAM

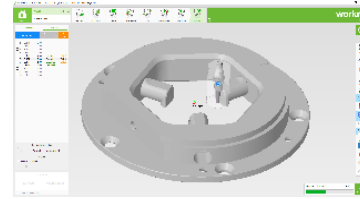

worknc
Dental

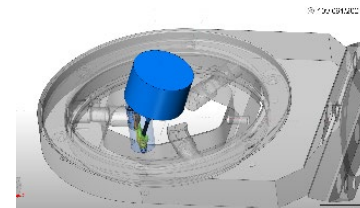

MILL
BOX | sum

FOLLOW-ME!
TECHNOLOGY GROUP

* Soon

List of compatibilities available

AB
ACE
ADIN
ALPHABIO
ANCLADEN
ANKYLOS
ANTHOGRY
ARDS
ASTRA
AVINENT
BEGO
BIOCONCEPT
BIOGENESIS
BIOHORIZONS
BIOMET 3i
BIOLOK
BIONER
BIOTEC
BIOTECH
BREDENT MEDICAL
BTI
BTK
B&W
CAMLOG
CONEXÃO SISTEMA DE PRÓTESE
CORTEX
DENTAL TECH
DENTAURUM
DENTIS
DENTIUM

DIO IMPLANTS
EASY IMPLANT
ECKERMANN
ELITE MEDICA
EUROTEKNIKA
GALIMPLANT
GC TECH
GLOBAL D (TEKKA)
GMI (ILERIMPLANT)
GT MEDICAL
HAHN IMPLANT (GLIDEWELL)
HI-TEC
HIOSSEN
IBS
IDO IMPLANTS
IHDE DENTAL (IMBIODENT)
IMPLANT DIRECT
IMPLANT GENESIS
INTRA-LOCK
JDENTALCARE
KEYSTONE
KLOCKNER
LASAK
LEADER
MEDENTIS
MEGAGEN
MICRODENT
MIS
MOZO-GRAU
MPI

NEOBIOTECH
NEODENT
NEOSS
NOBEL BIO CARE
NORIS MEDICAL
NORMON
NOVA IMPLANTS
OSSTEM IMPLANT
OSTEOPLUS
PALTOP
PHIBO
PROCLINIC
RADHEX
SEWON MEDIX
SIC INVENT
SIGNO VINCES
SOUTHERN IMPLANTS
STRAUMANN
SYBRON IMPLANT SOLUTIONS
TBR
TITANIUM - FIX
TRE-OSS
TRI DENTAL IMPLANTS
TRINON
UFIT
VULKAN IMPLANTS
XIVE
YES IMPLANT
ZIACOM (OSSEOLIFE)
ZIMMER

AB

- ✿ I2

Implant: Ø 3,5/3,75/4,2/4,5/ 5/6
Platform: Standard (Code 0040)

p. 89
- ✿ I22

Implant: Ø 3,75/4,22
Platform: Standard (Code 0040)

p. 89
- ✿ I5

Implant: Ø 3,5/3,75/4,2/4,5/5/6/7/8
Platform: Standard (Code 0040)

p. 89
- ✿ I55

Implant: Ø 3,75/4,2/4,5/5/6/7/8
Platform: Standard (Code 0040)

p. 89
- ✿ I10

Implant: Ø 4,2/5
Platform: Standard (Code 0040)

p. 89
- ✿ I15

Implant: Ø 6/7/8
Platform: Standard (Code 0040)

p. 89
- ✿ Multi Unit D1-P64

Platform: Universal (Code 0025)

p. 78

ACE

- ✿ External Hex

Implant: Ø 3,3
Platform: NP 3,5 (Code 0023)

p. 76
- Implant: Ø 3,75/4
Platform: RP 4,1 (Code 0024)

p. 77
- Implant: Ø 4,75
Platform: WP 5 (Code 0058)

p. 104

- ✿ Infinity TRI-CAM

Implant: Ø 3,5
Platform: 3,5 (Code 0026)

p. 79
- Implant: Ø 4,3
Platform: 4,3 (Code 0027)

p. 80
- Implant: Ø 5
Platform: 5 (Code 0028)

p. 81
- ✿ Infinity Internal Hex

Implant: Ø 3,7/4,1
Platform: 3,5 (Code 0040)

p. 89
- Implant: Ø 4,7/5,1
Platform: 4,5 (Code 0041)

p. 91
- ✿ Infinity Octagon

Implant: Ø 3,3/4,1/4,8
Platform: RP 4,8 (Code 0037)

p. 86
- Implant: Ø 4,8
Platform: WP 6,5 (Code 0096)

p. 123
- ✿ Multi Unit

Platform: Universal (Code 0025)

p. 78
- ADIN

✿ Swell

Implant: Ø 3,3
Platform: 3,45 (Code 0040)

p. 89
- Implant: Ø 3,75/4,2
Platform: 3,6 (Code 0040)

p. 89
- Implant: Ø 5
Platform: 4 (Code 0040)

p. 89
- Implant: Ø 6
Platform: 4,6 (Code 0040)

p. 89
- ✿ Touareg-S / Touareg-OS

Implant: Ø 3,5
Platform: 3,45 (Code 0040)

p. 89
- Implant: Ø 3,75/4,2
Platform: 3,6 (Code 0040)

p. 89

- Implant: Ø 5
Platform: 4 (Code 0040)

p. 89
- Implant: Ø 6
Platform: 5 (Code 0040)

p. 89
- ✿ Touareg CloseFit

Implant: Ø 2,75
Platform: UNP (Code 0188)

p. 166
- Implant: Ø 3
Platform: NP (Code 0145)

p. 142
- Implant: Ø 3,5
Platform: RP (Code 0021)

p. 74
- Implant: Ø 4,3/5
Platform: WP (Code 0022)

p. 75
- ✿ Multi Unit TMA

Platform: Universal (Code 0025)

p. 78

ALPHABIO

- ✿ Internal Hex Connection (IH) SPI

Implant: Ø 3,3/3,75/4,2/5/6
Platform: Universal (Code 0040)

p. 89
- ✿ Internal Hex Connection (IH) ICE

Implant: Ø 3,7/3,75/4,2/4,65/5,3
Platform: Universal (Code 0040)

p. 89
- ✿ Internal Hex Connection (IH) DFI

Implant: Ø 3,3/3,75/4,2/4,5
Platform: Universal (Code 0040)

p. 89
- ✿ Internal Hex Connection (IH) ATID

Implant: Ø 3,3/3,75/4,2/5/6
Platform: Universal (Code 0040)

p. 89

- ✿ Internal Hex Connection (IH) NEO

Implant: Ø 3,75/4,2/5
Platform: 3,5 (Code 0040)

p. 89
- ✿ Conical Hex Connection (CHC) NICE

Implant: Ø 3,2
Platform: Narrow (Code 0136)

p. 140

- ✿ Conical Hex Connection (CHC) NEO

Implant: Ø 3,2/3,5
Platform: Narrow (Code 0136)

p. 140
- ✿ Conical Standard Connection (CS)

Implant: Ø 3,75/4,2/5
Platform: Standard (Code 0169)

p. 157
- ✿ Multi-Unit

Platform: Standard (Code 0195)

p. 171

ANCLADEN

- ✿ Ancialock

Implant: Ø 3,75/4,25/5
Platform: 3,5 (Code 0040)

p. 89

ANKYLOS

- ✿ Ankylos

Implant: Ø 3,5
Platform: 3,5 (Code 0075)

p. 110
- Implant: Ø 4,5
Platform: 4,5 (Code 0075)

p. 110
- Implant: Ø 5,5
Platform: 5,5 (Code 0075)

p. 110
- Implant: Ø 7
Platform: 7 (Code 0075)

p. 110
- ✿ Balance Base Narrow Multi Unit

Platform: Universal (Code 0183)

p. 163

ANTHOGYR

- ✿ Anthofit HE

Implant: Ø 5
Platform: L (5) (Code 0058)

p. 104

- ✿ Axiom REG / PX

Implant: Ø 3,4
Platform: 3,4 (Code 0161)

p. 149
- Implant: Ø 4
Platform: 4 (Code 0149)

p. 143
- Implant: Ø 4,6
Platform: 4,6 (Code 0149)

p. 143
- Implant: Ø 5,2
Platform: 5,2 (Code 0162)

p. 150

- ✿ Ossfit

Implant: Ø 3,5/4,2
Platform: 4,8 (Code 0074)

p. 109
- Implant: Ø 3,5/4,2
Platform: 4,8 (Code 0037)

p. 86
- Implant: Ø 5
Platform: 6,5 (Code 0096)

p. 121

- ✿ Multi Unit

Implant: Ø 4,8
Platform: Universal (Code 0163)

p. 151

ARDS

- ✿ Smart

Implant: Ø 3,75/4,2/4,5
Platform: 3,75 (Code 0040)

p. 89
- ✿ Classic

Implant: Ø 3,75/4,2/4,5
Platform: 3,75 (Code 0040)

p. 89
- Implant: Ø 3,3/3,75/4,2/5/6
Platform: 3,75 (Code 0040)

p. 89
- ✿ Premium

Implant: Ø 3,3/3,75/4,2/5/6
Platform: 3,75 (Code 0040)

p. 89
- ✿ CIT

Implant: Ø 3,3/3,75/4,2/5/6
Platform: 3,75 (Code 0040)

p. 89

ASTRA

- ✿ Yellow

Implant: Ø 3
Platform: Yellow (Code 0109)

p. 126
- ✿ Aqua

Implant: Ø 3,5/4
Platform: Aqua (Code 0004)

p. 57
- ✿ Lilac

Implant: Ø 4,5/5
Platform: Lilac (Code 0005)

p. 58
- ✿ Cono 20°

Platform: Regular/Wide (Code 0066)

p. 108
- ✿ Evolution (Internal)

Implant: Ø 3
Platform: 3.0 (Code 0090)

p. 120
- Implant: Ø 3,6
Platform: 3.6 (Code 0006)

p. 59
- Implant: Ø 4,2
Platform: 4.2 (Code 0007)

p. 60
- Implant: Ø 4,8
Platform: 4.8 (Code 0091)

p. 121
- Implant: Ø 5,4
Platform: 5.4 (Code 0092)

p. 122
- ✿ Uni Abutment

Platform: Universal (Code 0008)

p. 61

AVINENT

- HE/EC
 - Implant: Ø 3,3/3,8/4/4,2/4,8//4,5/5 Platform: 4,1 (Code 0024) p. 77
 - Implant: Ø 4,8 Platform: 5,1 (Code 0061) p. 107
- HI/IC
 - Implant: Ø 3,1//3,5/4 Platform: 3,5 (Code 0040) p. 89
 - Implant: Ø 3,3/3,8/4/4,2/4,8//4,5/5 Platform: 4,1 (Code 0040) p. 89
- Transeptelial
 - Platform: Regular (Code 0025) p. 78

BEGO

- RS/RSX
 - Implant: Ø 3.0 Platform: 3.0 (Code 0049) p.98
- S/RI/RS/RSX
 - Implant: Ø 3,25/3,75 Platform: 3,67 (Code 0050) p. 99
 - Implant: Ø 4,1 Platform: 4,1 (Code 0051) p. 100
 - Implant: Ø 4,5 Platform: 4,5 (Code 0052) p. 101
 - Implant: Ø 5,5 Platform: 5,5 (Code 0081) p. 112
- MINI
 - Implant: Ø 2,7/2,9/3,1 Platform: Mini (Code 0187) p.165
- MULTIPLUS
 - Platform: Universal (Code 0150) p.144

BIOCONCEPT

- BC Tissue Level Standard
 - Implant: Ø 3,3/4,1/4,8 Platform: Regular (Code 0037) p. 86
- BC Tissue Level Standard Plus
 - Implant: Ø 4,8 Platform: Regular (Code 0037) p. 86
- BC Tissue Level Tapered Effect
 - Implant: Ø 4,8 Platform: Regular (Code 0037) p. 86
- BC Bone Level
 - Implant: Ø 3,3 Platform: Narrow (Code 0033) p. 84
 - Implant: Ø 4,1/4,8 Platform: Regular (Code 0035) p. 85
- BV Tapered Bone Level
 - Implant: Ø 3,5 Platform: Narrow (Code 0029) p. 82
 - Implant: Ø 4/4,5/5 Platform: Regular (Code 0030) p. 83

BIOGENESIS

- 3icon
 - Implant: Ø 3,3 Platform: Mini (Pink) (Code 0023) p. 76
 - Implant: Ø 3,75/4/4,3/4,5 Platform: Regular (Blue) (Code 0024) p. 77
 - Implant: Ø 5/5,5 Platform: Wide (Yellow) (Code 0058) p. 104
- Aticon
 - Implant: Ø 3,5/4/4,5/5 Platform: Blue (Code 0005) p. 58
- Aticon (Cone 20°)
 - Platform: Regular/Wide (Code 0066) p. 108

- Iticon
 - Implant: Ø 3,5/4,1/4,8 Platform: 4,8 (Code 0037) p. 86

BIOHORIZONS

- Tapered Internal
 - Implant: Ø 3/3,4 Platform: 3 (Grey) (Code 0102) p. 125
 - Implant: Ø 3,8 Platform: 3,5 (Yellow) (Code 0040) p. 89
 - Implant: Ø 4,6 Platform: 4,5 (Green) (Code 0041) p. 91
 - Implant: Ø 5,8 Platform: 5,7 (Blue) (Code 0080) p. 111
- Internal
 - Implant: Ø 3,5/4 Platform: 3,5 (Yellow) (Code 0040) p. 89
 - Implant: Ø 4/5 Platform: 4,5 (Green) (Code 0041) p. 91
 - Implant: Ø 5/6 Platform: 5,7 (Blue) (Code 0080) p. 111
- Multi Unit
 - Platform: Universal (Code 0025) p. 78

BIOMET 3i

- Osseotite
 - Implant: Ø 3,25 Platform: 3,4 (Code 0003) p. 56
 - Implant: Ø 3,75/4 Platform: 4,1 (Code 0024) p. 77
 - Implant: Ø 5 Platform: 5 (Code 0058) p. 104

- Certain
 - Implant: Ø 3,25/4 Platform: 3,4 (Code 0001) p. 54
 - Implant: Ø 4/5 Platform: 4,1 (Code 0002) p. 55
 - Implant: Ø 5 Platform: 5 (Code 0057) p. 103
- Low Profile
 - Platform: Universal (Code 0025) p. 78

BIOLOK

- External Hexagon
 - Implant: Ø 3,45 Platform: 3,45 (Code 0003) p. 56

BIONER

- Ikelt / Bikelt
 - Implant: Ø 3,3/3,75/4 Platform: 4,1 (Code 0024) p. 77
- Ikelt
 - Implant: Ø 5 Platform: 5 (Code 0058) p. 104
- Hikelt
 - Implant: Ø 3,8 Platform: 3,95 (Code 0040) p. 89
 - Implant: Ø 4,7 Platform: 4,9 (Code 0041) p. 91

- TopDM
 - Implant: Ø 3,5 Platform: 3,5 (Code 0021) p. 74
 - Implant: Ø 4 Platform: 4 (Code 0021) p. 74
 - Implant: Ø 5 Platform: 5 (Code 0021) p. 74

- Transeptelial A-5M
 - Platform: Regular (Code 0025) p. 78

BIOTEC

- SPR/CIM
 - Implant: Ø 3,3 Platform: 3,3 (Code 0040) p. 89
 - Implant: Ø 3,75 Platform: 3,75 (Code 0040) p. 89
- SPR/SPTT/CIM
 - Implant: Ø 4,2 Platform: 4,2 (Code 0040) p. 89
 - Implant: Ø 5 Platform: 5 (Code 0040) p. 89

BIOTECH

- Kontakt
 - Implant: Ø 3 Platform: Yellow Narrow (Code 0164) p. 152
 - Implant: Ø 3,6/4,2/4,8/5,4 Platform: Regular (Code 0165) p. 153

BREDENT MEDICAL

- Copa Sky
 - Implant: Ø 3,5/4/4,5/5/6 Platform: 3,3 (Code 0251) p. 181
- Narrow Sky
 - Implant: Ø 3,5 Platform: NP 3,5 (Code 0110) p. 127
- Blue Sky
 - Implant: Ø 3,5/4/4,5/5,5 Platform: 4 (Code 0111) p. 128
- Blue Sky Classic
 - Implant: Ø 3,5/4/4,5 Platform: 4 (Code 0111) p. 128

BTI

- External Connection Tiny
 - Implant: Ø 2,5/3/3,3/3,5/3,75 Platform: Tiny 3,5 (Code 0009) p. 62
- External Connection
 - Implant: Ø 3,75/4/4,5/5 Platform: Universal 4,1 (Code 0024) p. 77
 - Implant: Ø 4,5/5/5,5 Platform: Ancha 5,5 (Code 0060) p. 106
- Internal Connection
 - Implant: Ø 3,3/3,5/3,75/4/4,25/4,5/5/5,5 Platform: Universal 4,1 (Code 0010) p. 63
 - Implant: Ø 5/5,5/6/6,25 Platform: Ancha 5,5 (Code 0059) p. 105
- Multi-IM
 - Platform Universal 4,1 (Code 0151) p. 145

BTK

- Klassic / Konic
 - Implant: Ø 3,25PL/3,75/4 Platform: 4,1 ER (Code 0024) p. 77
 - Implant: Ø 3,25/4 Platform: 3,5 IR (Code 0040) p. 89

B&W

- External Hexagon
 - Implant: Ø 3,75/4 Platform: 4,1 (Code 0024) p. 77
 - Implant: Ø 5 Platform: 5 (Code 0058) p. 104
- Internal Hexagon CIH
 - Implant: Ø 3,3/4 Platform: 4 (Code 0040) p. 89

CAMLOG

★ Camlog Screw-Line

Implant: Ø 3,3 Platform: 3,3 (Code 0087)	p. 118
Implant: Ø 3,8 Platform: 3,8 (Code 0011)	p. 64
Implant: Ø 4,3 Platform: 4,3 (Code 0012)	p. 65
Implant: Ø 5 Platform: 5 (Code 0088)	p. 119

★ Conelog Screw-Line/Progressive -Line

Implant: Ø 3,3 Platform: 3,3 (Code 0119)	p. 129
Implant: Ø 3,8 Platform: 3,8 (Code 0120)	p. 130
Implant: Ø 4,3 Platform: 4,3 (Code 0121)	p. 131

CONEXÃO SISTEMA DE PRÓTESE

★ Flash

Implant: Ø 3,5/4,3/5 Platform: Universal (Code 0021)	p. 74
---	-------

★ Torq

Implant: Ø 3,5/3,75/4 Platform: Universal (Code 0021)	p. 74
--	-------

★ Expand

Implant: Ø 3,75/4/5 Platform: Universal (Code 0021)	p. 74
--	-------

CORTEX

★ Dynamix

Implant: Ø 3,3/3,8/4,2/5/6 Platform: 3,75 (Code 0040)	p. 89
--	-------

★ Classix

Implant: Ø 3,3/3,8/4,2/5/6 Platform: 3,75 (Code 0040)	p. 89
--	-------

★ Saturn

Implant: Ø 3,8/4,2 Platform: 3,5 (Code 0040)	p. 89
---	-------

★ Conical Platform:

Implant: Ø 3 Platform: NP (Code 0109)	p. 126
Implant: Ø 3,3/3,8/4,2 Platform: RP (Code 0004)	p. 57
Implant: Ø 5/6 Platform: WP (Code 0005)	p. 58

★ Magix

Implant: Ø 3,3/3,8/4,2 Platform: RP (Code 0004)	p. 57
--	-------

★ Multi Unit

Platform Universal (Code 0025)	p. 78
--------------------------------	-------

DENTAL TECH

★ Implogic

Implant: Ø 4,5 Platform: 4,5 (Blue) (Code 0041)	p. 91
--	-------

DENTAURUM

★ Tiologic

Implant: Ø 3,3 Platform: Small (Code 0130)	p. 136
Implant: Ø 3,7/4,2 Platform: Medium (Code 0131)	p. 137
Implant: Ø 4,8/5,5 Platform: Large (Code 0132)	p. 138

DENTIS

★ s-Clean

Implant: Ø 3,7 Platform: Mini (Code 0030)	p. 83
Implant: Ø 4,1/4,3 Platform: Regular (Code 0030)	p. 83
Implant: Ø 4,8 Platform: Wide (Code 0030)	p. 83

DENTIUM

★ SimpleLine II

Implant: Ø 3,8/4,3 Platform: 4,8 (Code 0074)	p. 109
Implant: Ø 3,8/4,3 Platform: 4,8 (Code 0037)	p. 86
Implant: Ø 4,3/4,8 Platform: 6,5 (Code 0096)	p. 123

★ SuperLine and Implantium

Implant: Ø 3,4 Platform: 3,6 (Code 0030)	p. 83
Implant: Ø 3,8 Platform: 4 (Code 0030)	p. 83
Implant: Ø 4,3 Platform: 4,5 (Code 0030)	p. 83
Implant: Ø 4,8 Platform: 5 (Code 0030)	p. 83
Implant: Ø 4,8 Platform: 6 (Code 0030)	p. 83

★ Multi Unit SuperLine and Implantium

Platform: 4,5 (Code 0193)	p. 169
---------------------------	--------

★ NR Line

Implant: Ø 3,1 Platform: 3,2 (Code 0190)	p. 167
Implant: Ø 3,1 Platform: 3,6 (Code 0190)	p. 167
Implant: Ø 3,6 Platform: 3,6 (Code 0191)	p. 168
Implant: Ø 4,3 Platform: 4,3 (Code 0191)	p. 168
Implant: Ø 5 Platform: 5 (Code 0191)	p. 168
Implant: Ø 6 Platform: 6 (Code 0191)	p. 168

★ Multi Unit NR Line

Platform: 5 (Code 0192)	p. 169
-------------------------	--------

DIO IMPLANTS

★ SM System

Implant: Ø 4,5/5/5,3 Platform: Regular/Wide (Code 0013)	p. 66
--	-------

★ UF II Narrow

Implant: Ø 3/3,3 Platform: Narrow (Code 0014)	p. 67
--	-------

★ UF II

Implant: Ø 3,8/4/4,5/5/5,5 Platform: Regular (Code 0030)	p. 83
---	-------

★ External

Implant: Ø 3,3/3,8 Platform: Narrow 3,5 (Code 0023)	p. 76
Implant: Ø 3,75/4/4,5 Platform: Regular 4,1 (Code 0024)	p. 77
Implant: Ø 5/5,3/5,5/6 Platform: Wide 5,1 (Code 0061)	p. 107

EASY IMPLANT

★ Master C

Implant: Ø 3,5 Platform: 3,5 (Ocean) (Code 0004)	p. 57
Implant: Ø 4 Platform: 4 (Ocean) (Code 0004)	p. 57
Implant: Ø 4,5 Platform: 4,5 (Lilas) (Code 0030)	p. 83
Implant: Ø 5 Platform: 5 (Lilas) (Code 0030)	p. 83

★ Master S

Implant: Ø 3,3 Platform: 3,3 (Ocean) (Code 0004)	p. 57
Implant: Ø 3,75 Platform: 3,75 (Lilas) (Code 0030)	p. 83
Implant: Ø 4,25 Platform: 4,25 (Lilas) (Code 0030)	p. 83
Implant: Ø 4,75 Platform: 4,75 (Lilas) (Code 0030)	p. 83

★ Master L

Implant: Ø 3,3 Platform: 3,3 (Lilas) (Code 0030)	p. 83
Implant: Ø 3,75 Platform: 3,75 (Lilas) (Code 0030)	p. 83
Implant: Ø 4,25 Platform: 4,25 (Lilas) (Code 0030)	p. 83
Implant: Ø 4,75 Platform: 4,75 (Lilas) (Code 0030)	p. 83

★ Mini

Implant: Ø 3 Platform: 3 (Code 0176)	p.160
---	-------

★ Multi Unit Conical Abutment

Platform Universal (Code 0025)	p. 78
--------------------------------	-------

ECKERMANN

★ Hexagon

Implant: Ø 3/3,5/4/4,5/5 Platform: 4,1 (Code 0024)	p. 77
---	-------

ELITE MEDICA

★ External Connection

Implant: Ø 3,75 Platform: Narrow (Code 0023)	p. 76
Implant: Ø 4 Platform: Regular (Code 0024)	p. 77
Implant: Ø 5 Platform: Wide (Code 0061)	p. 109

EUROTEKNIKA

★ Naturactis

Implant: Ø 3,5 Platform: 3,4 (Code 0004)	p. 57
Implant: Ø 4 Platform: 3,8 (Code 0004)	p. 57
Implant: Ø 4,5 Platform: 4,3 (Code 0004)	p. 57

Implant: Ø 5 Platform: 4,8 (Code 0004)	p. 57
---	-------

★ Uneva

Implant: Ø 3,6 Platform: 4,1 (Code 0024)	p. 77
Implant: Ø 4,1 Platform: 4,1 (Code 0024)	p. 77

★ Uneva (Platform: Switching)

Implant: Ø 4,8 Platform: 4,1 (Code 0024)	p. 77
Implant: Ø 6 Platform: 4,1 (Code 0024)	p. 77

★ Natea

Implant: Ø 3,6/4,1/4,8 Platform: Narrow (Code 0004)	p. 57
Implant: Ø 3,6/4,1/4,8 Platform: Regular (Code 0004)	p. 57
Implant: Ø 6 Platform: Wide (Code 0004)	p. 57

★ Aesthetica

Implant: Ø 4,1 Platform: 4,8 (Code 0074)	p. 109
Implant: Ø 4,1 Platform: 4,8 (Code 0037)	p. 86
Implant: Ø 4,8 Platform: 6,5 (Code 0096)	p. 123

★ Naturall

Implant: Ø 3,5 Platform: Narrow (Code 0004)	p. 57
Implant: Ø 4/4,5 Platform: Regular (Code 0004)	p. 57
Implant: Ø 5 Platform: Wide (Code 0004)	p. 57

★ Multi Unit Tetra

Platform Universal (Code 0025)	p. 78
--------------------------------	-------

GALIMPLANT

✿ Internal Connection	
Implant: Ø 3,5	
Platform: 3,5 (Code 0004)	p. 57
Implant: Ø 4	
Platform: 4 (Code 0004)	p. 57
Implant: Ø 5	
Platform: 5 (Code 0004)	p. 57
✿ Abutment Multi-Position	
Platform: Universal (Code 0025)	p. 78

GC TECH

✿ AADVA Standard / Tapered Implants	
Implant: Ø 3,3	
Platform: Narrow (Code 0196)	p. 172
Implant: Ø 4	
Platform: Regular (Code 0197)	p. 173
Implant: Ø 5	
Platform: Wide (Code 0198)	p. 174

GLOBAL D (TEKKA)

✿ In-Kone Universal	
Implant: Ø 3,5/4/4,5/5	
Platform: 5 (Code 0152)	p. 146
✿ In-Kone Primo	
Implant: Ø 3,5/4/4,5/5	
Platform: 5 (Code 0152)	p. 146

GMI (ILERIMPLANT)

✿ Phoenix	
Implant: Ø 3,3/3,75/4	
Platform: Standard 4,1 (Code 0024)	p. 77
Implant: Ø 5	
Platform: Wide 5,1 (Code 0061)	p. 107
✿ Frontier	
Implant: Ø 3,3/3,75/4,25	
Platform: RP 3,3 (Code 0040b)	p. 90
Implant: Ø 4,75/5,75	
Platform: WP 4,3 (Code 0041b)	p. 92
✿ Universal	
Platform: PS-RP 4,8 (Code 0025)	p. 78

GT MEDICAL

✿ Best Fit Internal Octagon	
Implant: Ø 3,7/4,3/4,8	
Platform: Regular (Code 0074)	p. 109
Implant: Ø 3,7/4,3/4,8	
Platform: Regular (Code 0037)	p. 86
✿ Best Fit Internal Hexagon	
Implant: Ø 3,7/4,1/4,3/4,8	
Platform: Wide (Code 0005)	p. 58
✿ Best Fit External Hexagon	
Implant: Ø 3,5	
Platform: Narrow (Code 0023)	p. 76
Implant: Ø 4,1	
Platform: Regular (Code 0024)	p. 77
Implant: Ø 5,1	
Platform: Wide (Code 0061)	p. 107

HAHN IMPLANT (GLIDEWELL)

✿ Hahn Tapered Implant	
Implant: Ø 3,5/4,3	
Platform: 3,5/4,3 (Code 0021)	p. 74
Implant: Ø 5	
Platform: 5 (Code 0022)	p. 75
Implant: Ø 7	
Platform: 7 (Code 0124)	p. 132
✿ Multi Unit Abutment system	
Platform: Universal (Code 0025)	p. 78

HI-TEC

✿ Tapered Self Thread	
Implant: Ø 3,3/3,75	
Platform: 3,5 (Code 0040)	p. 89
Implant: Ø 4,2/5	
Platform: 4,5 (Code 0041)	p. 91
✿ Logic Plus	
Implant: Ø 3,5	
Platform: 3,7 (Code 0040)	p. 89
Implant: Ø 4,3	
Platform: 3,9 (Code 0040)	p. 89

HIOSSEN

✿ ETTI SA/ETIII SA	
Implant: Ø 3,5	
Platform: Mini (Code 0029)	p. 82
Implant: Ø 4/4,5/5	
Platform: Regular (Code 0030)	p. 83
✿ ETTI BA	
Implant: Ø 3,5	
Platform: Mini (Code 0029)	p. 82
Implant: Ø 4/4,5/5	
Platform: Regular (Code 0030)	p. 83

IBS

✿ Magic FC	
Implant: Ø 4/4,5/5/5,5/6/6,5	
Platform: 3,8 (Code 0030)	p. 83
✿ N.R Fix	
Implant: Ø 3/3,5	
Platform: 3,8 (Code 0030)	p. 83

IDO IMPLANTS

✿ IDo Implant	
Implant: Ø 3,8/4/4,5/5/5,5/6/7	
Platform: Universal (Code 0030)	p. 83

IHDE DENTAL (IMBIODENT)

✿ Bone Level Plus	
Implant: Ø 3,3	
Platform: 3,3 (Code 0033)	p. 84
Implant: Ø 4,1	
Platform: 4,1 (Code 0035)	p. 85
Implant: Ø 4,8	
Platform: 4,8 (Code 0035)	p. 85

IMPLANT DIRECT

✿ RePlus / Replant / Reactive	
Implant: Ø 3,5/3,7/4,2	
Platform: 3,5 (Code 0026)	p. 79
Implant: Ø 4,3/4,7	
Platform: 4,3 (Code 0027)	p. 80
Implant: Ø 5/5,7	
Platform: 5 (Code 0028)	p. 81
✿ Legacy	
Implant: Ø 3,7/4,2	
Platform: 3,5 (Code 0040)	p. 89
Implant: Ø 4,7/5,2	
Platform: 4,5 (Code 0041)	p. 91

✿ Swishplant / Swishplus

Implant: Ø 4,1/4,8	
Platform: 4,8 (Code 0074)	p. 109
Implant: Ø 4,1/4,8	
Platform: 4,8 (Code 0037)	p. 86
Implant: Ø 4,8/5,7	
Platform: 6,5 (Code 0096)	p. 123

✿ SwishActive

Implant: Ø 3,3	
Platform: 3 (Code 0021)	p. 74
Implant: Ø 4,1/4,8	
Platform: 3,4 (Code 0022)	p. 75

✿ Interactive

Implant: Ø 3,2/3,7	
Platform: 3 (Code 0021)	p. 74
Implant: Ø 4,3/5	
Platform: 3,4 (Code 0022)	p. 75

IMPLANT GENESIS

✿ Aktiv System	
Implant: Ø 3,5/3,75/4,2/5	
Platform: Standard (Code 0040)	p. 89

INTRA-LOCK

✿ Unihex	
Implant: Ø 4	
Platform: Regular (Code 0024)	p. 77
✿ IntraHex	
Implant: Ø 3,75/4	
Platform: 3,5 (Code 0040)	p. 89
Implant: Ø 4,75	
Platform: 4,5 (Code 0041)	p. 91

JDENTALCARE

✿ JDEvolution/JDEvolution Plus	
Implant: Ø 3,7	
Platform: 3,7 (Code 0040)	p. 89
Implant: Ø 4,3/5	
Platform: 4 (Code 0040)	p. 89
Implant: Ø 6	
Platform: 5 (Code 0040)	p. 89
✿ JD ICON	
Implant: Ø 3,9	
Platform: 3,9 (Code 0022)	p. 75
Implant: Ø 4,3	
Platform: 4 (Code 0022)	p. 75
Implant: Ø 5	
Platform: 4,7 (Code 0022)	p. 75

KEYSTONE

✿ Internal TiLobe PrimaConnex	
Implant: Ø 3,3/3,5	
Platform: 3,5 (Code 0044)	p. 93
Implant: Ø 4/4,1	
Platform: 4,1 (Code 0045)	p. 94
Implant: Ø 5	
Platform: 5 (Code 0046)	p. 95
✿ Restore	
Implant: Ø 3,75/4	
Platform: RD 4,1 (Code 0024)	p. 77

KLOCKNER

✿ Essential Cone	
Implant: Ø 3,5/4/4,5	
Platform: 4,5 (Code 0054)	p. 102

✿ KL	
Implant: Ø 3,5	
Platform: Narrow (Code 0023)	p. 76
Implant: Ø 4,1	
Platform: Regular (Code 0024)	p. 77
Implant: Ø 5,1	
Platform: Wide (Code 0061)	p. 107

✿ Vega	
Implant: Ø 3,5	
Platform: NV (Code 0082)	p. 113
Implant: Ø 4/4,5	
Platform: RV (Code 0083)	p. 114

LASAK

✿ Bioniq	
Implant: Ø 2,9	
Platform: QN (Yellow) (Code 0166)	p. 154
Implant: Ø 3,5/4/5	
Platform: QR (Blue) (Code 0167)	p. 155

LEADER

✿ Tixos Internal Hex	
Implant: Ø 3,3	
Platform: 3,5 (Code 0040)	p. 89
Implant: Ø 3,75	
Platform: 4 (Code 0040)	p. 89
✿ Tixos External Hex	
Implant: Ø 3,3/3,75	
Platform: 4,1 (Code 0024)	p. 77
Implant: Ø 5	
Platform: 5 (Code 0058)	p. 104

MEDENTIS

✿ ICX-Templant	
Implant: Ø 3,75	
Platform: 3,75 (Code 0125)	p. 133
Implant: Ø 4,1	
Platform: 4,1 (Code 0125)	p. 133
Implant: Ø 4,8	
Platform: 4,8 (Code 0125)	p. 133
✿ Premium/Active Master	
Implant: Ø 3,3	
Platform: 3,3 (Pink) (Code 0249)	p. 179

MEGAGEN

✿ AnyRidge	
Implant: Ø 3,5	
Platform: Small (Code 0015)	p. 68
Implant: Ø 4/4,5	
Platform: Regular (Code 0015)	p. 68
Implant: Ø 5/5,5	
Platform: Wide (Code 0015)	p. 68
✿ AnyOne Internal	
Implant: Ø 3,5/4/4,5/5/6/7	
Platform: General (Code 0030)	p. 83

✿ AnyOne External	
Implant: Ø 3,5	
Platform: Small 3,5 (Code 0023)	p. 76
Implant: Ø 4	
Platform: Regular 4,1 (Code 0024)	p. 77
Implant: Ø 4,5	
Platform: Regular 4,5 (Code 0024)	p. 77
Implant: Ø 5	
Platform: Wide 5 (Code 0058)	p. 104
Implant: Ø 6	
Platform: SuperWide 5,5 (Code 0058)	p. 104

✿ Cone Abutment	
Implant: Ø Universal	
Platform: 3,8 (Code 0128)	p. 134
Implant: Ø Universal	
Platform: 4,8 (Code 0074)	p. 109
✿ Mini Narrow Ridge	
Implant: Ø 3/3,4	
Platform: Mini (Code 0014)	p. 67
✿ Multi Unit N Type	
Platform: Universal (Code 0025)	p. 78

MICRODENT

✿ Universal	
Implant: Ø 3,3/3,5/3,75/4	
Platform: 4,1 (Code 0024)	p. 77
Implant: Ø 4,2/5	
Platform: 5,1 (Code 0058)	p. 104
✿ Ektos	
Implant: Ø 3,7/4,2	
Platform: 3,5 (Code 0040b)	p. 90

MIS

✿ Lance	
Implant: Ø 3,75/4,2	
Platform: Standard (Code 0024)	p. 77
Implant: Ø 5	
Platform: Wide (Code 0058)	p. 104
✿ Multi Unit	
Platform: General (Code 0020)	p. 73
✿ Seven	
Implant: Ø 3,3	
Platform: Narrow (Code 0019)	p. 72
Implant: Ø 3,75/4,2	
Platform: Standard (Code 0040)	p. 89
Implant: Ø 5/6	
Platform: Wide (Code 0041)	p. 91

✿ M4	
Implant: Ø 3,3	
Platform: Narrow (Code 0019)	p. 72
Implant: Ø 3,75/4,2	
Platform: Standard (Code 0040)	p. 89
Implant: Ø 5/6	
Platform: Wide (Code 0041)	p. 91

✿ C1	
Implant: Ø 3,3	
Platform: Narrow (Code 0016)	p. 69
Implant: Ø 3,75/4,2	
Platform: Standard (Code 0017)	p. 70
Implant: Ø 5	
Platform: Wide (Code 0018)	p. 71

✿ V3	
Implant: Ø 3,9/4,3/5	
Platform: Standard (Code 0017)	p. 70

MOZO-GRAU

✿ MG Osseous	
Implant: Ø 3,3	
Platform: 3,4 Mini (Code 0003)	p. 56
Implant: Ø 3,4/3,75/4,25	
Platform: 4,1 Standard (Code 0024)	p. 77
Implant: Ø 5	
Platform: 5 Maxi (Code 0061)	p. 107

✿ MG Inhex	
Implant: Ø 3,3	
Platform: 2,3 Mini (Code 0109)	p. 126
Implant: Ø 3,75/4,25	
Platform: 2,8 Standard (Code 0004)	p. 57
Implant: Ø 5	
Platform: 3,8 Maxi (Code 0005)	p. 58

MPI

✿ External Connection HE Privilege	
Implant: Ø 3,3	
Platform: 3,5 (Code 0009)	p. 62
Implant: Ø 3,3/4	
Platform: 4,1 (Code 0024)	p. 77
Implant: Ø 5	
Platform: 5 (Code 0058)	p. 104

✿ Privilege CM	
Implant: Ø 3,5/4	
Platform: Regular (Code 0004)	p. 57
Implant: Ø 5	
Platform: Wide (Code 0005)	p. 58

✿ Excellence CM	
Implant: Ø 3,5/4	
Platform: Regular (Code 0004)	p. 57
Implant: Ø 5	
Platform: Wide (Code 0005)	p. 58

NEOBIOTECH

✿ EB External System	
Implant: Ø 3,5	
Platform: Narrow (Code 0023)	p. 76
✿ IS Implant: System	
Implant: Ø 4	
Platform: Regular 4 (Code 0030)	p. 83
Implant: Ø 4,5	
Platform: Regular 4,5 (Code 0030)	p. 83
Implant: Ø 5	
Platform: Wide 5 (Code 0030)	p. 83
Platform: 4,8 (Code 0025)	p. 78

NEODENT

✿ Helix GM/Drive GM/Titamax GM	
Implant: Ø 3,5/3,75/4/4,3/5/6	
Platform: Regular (Code 0186)	p. 164
✿ Mini Pilar CM	
Platform: Universal (Code 0025)	p. 78

NEOSS

✿ ProActive Straight/Tapered	
Implant: Ø 3,5 Green	
Platform: ProActive (Code 0047)	p. 96
Implant: Ø 4 Yellow	
Platform: ProActive (Code 0047)	p. 96
Implant: Ø 4,5 Blue	
Platform: ProActive (Code 0048)	p. 97
Implant: Ø 5 Peach	
Platform: ProActive (Code 0048)	p. 97
Implant: Ø 5,5 Lilac	
Platform: ProActive (Code 0048)	p. 97

NOBEL BIOCARE

✿ Branemark	
Implant: Ø 3,3	
Platform: Narrow (Code 0023)	p. 76
Implant: Ø 3,75/4	
Platform: Regular (Code 0024)	p. 77
Implant: Ø 5/6	
Platform: Wide (Code 0061)	p. 107
✿ Multi Unit	
Platform: Regular (Code 0025)	p. 78

✿ Replace	Implant: Ø 3,5 Platform: Narrow (Code 0026)	p. 79
	Implant: Ø 4,3 Platform: Regular (Code 0027)	p. 80
	Implant: Ø 5 Platform: Wide (Code 0028)	p. 81
	Implant: Ø 6 Platform: Platform: 6 (Code 0129)	p. 135
✿ Active	Implant: Ø 3 Platform: Mini 3.0 (Code 0159)	p. 147
	Implant: Ø 3,5 Platform: Narrow (Code 0021)	p. 74
	Implant: Ø 4,3/5 Platform: Regular (Code 0022)	p. 75
	Implant: Ø 5,5 Platform: Wide (Code 0124)	p. 132
NORIS MEDICAL		
✿ Tuff	Implant: Ø 3,3/3,75/4,2/5/6 Platform: 3,75 (Code 0040)	p. 89
✿ TuffTT	Implant: Ø 3,3/3,75/4,2/5/6 Platform: 3,75 (Code 0040)	p. 89
✿ Onix	Implant: Ø 3,3/3,75/4,2/5/6 Platform: 3,75 (Code 0040)	p. 89
✿ Cortical	Implant: Ø 4,0/5/6 Platform: 3,75 (Code 0040)	p. 89

✿ PteryCore	Implant: Ø 4,2 Platform: 3,75 (Code 0040)	p. 89
✿ PteryFit	Implant: Ø 4,2 Platform: 3,75 (Code 0040)	p. 89
NORMON		
✿ Normoimplant HE	Implant: Ø 3,25/3,75/4,25/4,75 Platform: 4,1 (Code 0024)	p. 77
✿ Normoimplant HI	Implant: Ø 3,75/4,25/4,75 Platform: 3,5 (Code 0040b)	p. 90
NOVA IMPLANTS		
✿ PSI/PCI	Implant: Ø 3,3/3,75/4,2/5/6 Platform: 3,75 (Code 0040b)	p. 90
OSSTEM IMPLANT		
✿ TS	Implant: Ø 3,5 Platform: Mini (Code 0029)	p. 82
	Implant: Ø 4/4,5/5/6/7 Platform: Regular (Code 0030)	p. 83
✿ US	Implant: Ø 3,3/3,5 Platform: Mini 3,5 (Code 0023)	p. 76
	Implant: Ø 3,75/4/4,5 Platform: Regular 4,1 (Code 0024)	p. 77
	Implant: Ø 5/5,5 Platform: Wide 5,1 (Code 0061)	p. 107
	Implant: Ø 5/5,5 Platform: Wide PS 5 (Code 0058)	p. 104

OSTEOPLUS		
✿ Shi	Implant: Ø 3,3 / 3,75 / 4,2 Platform: 3,5 (Code 0040)	p. 89
PALTOP		
✿ Advanced classic	Implant: Ø 3,25 Platform: Narrow (Blue) (Code 0229)	p. 178
	Implant: Ø 3,75/4,2/5 Platform: Standard (Code 0040b)	p. 90
✿ Advanced +	Implant: Ø 3,25 Platform: Narrow (Blue) (Code 0229)	p.178
	Implant: Ø 3,75/4,2/5 Platform: Standard (Code 0040b)	p. 90
✿ Dynamic	Implant: Ø 3,25 Platform: Narrow (Blue) (Code 0229)	p. 178
	Implant: Ø 3,75/4,2/5 Platform: Standard (Code 0040b)	p. 90
✿ DIVA	Implant: Ø 3,75/4,2/5 Platform: Standard (Code 0040b)	p. 90
✿ Universal Multi Unit	Platform: Universal (Code 0181)	p.162
PHIBO		
✿ TSH/BNT Serie 3	Implant: Ø 3,6 Platform: 4 (Code 0024)	p. 77
✿ TSH/BNT Serie 4	Implant: Ø 4,2 Platform: 4 (Code 0024)	p. 77

PROCLINIC		
✿ Aqua CM	Implant: Ø 3,5/4/5 Platform: 2,82 (Code 0004)	p. 57
✿ Cylindrical External/Conical External	Implant: Ø 3,75/4,25//3,5/4 Platform: 4,1 Estandar (Code 0024)	p. 77
	Implant: Ø 5 Platform: 5 Maxi (Code 0058)	p. 104
✿ Cylindrical Internal/Conical Internal	Implant: Ø 3,3/3,75/4,25/5//3,5/4/5 Platform: 3,5 (Code 0040)	p. 89
✿ SP Octa	Implant: Ø 3,3/4,1/4,8 Platform: 4,8 (Code 0074)	p. 109
	Implant: Ø 3,3/4,1/4,8 Platform: 4,8 (Code 0037)	p. 86
	Implant: Ø 4,8 Platform: 6,5 (Code 0096)	p. 123
RADHEX		
✿ PHI	Implant: Ø 3,75 Platform: 3,5 (Code 0040b)	p. 90
	Implant: Ø 4,5/5 Platform: 4,5 (Code 0041b)	p. 92
SEWON MEDIX		
✿ IH2 SLA SYSTEM	Implant: Ø 3,5 Platform: Mini (Code 0029)	p. 82
	Implant: Ø 3,5/4/4,5/5 Platform: Regular (Code 0030)	p. 83

✿ IH2 RBM SYSTEM	Implant: Ø 3,5 Platform: Mini (Code 0029)	p. 82
	Implant: Ø 3,5/4/4,5/5 Platform: Regular (Code 0030)	p. 83
✿ IH SYSTEM	Platform: Universal (Code 0025)	p. 78
SIC INVENT		
✿ Hexagonal System SICace	Implant: Ø 3,4/4 Platform: 3,3 (Code 0170)	p. 158
	Implant: Ø 4,5/5 Platform: 4,2 (Code 0171)	p. 159
SIGNO VINCES		
✿ Compact	Implant: Ø 4,5 Platform: CM3,8 (Code 0004)	p. 57
✿ Duocon	Implant: Ø 3,8 Platform: CM3,8 (Code 0004)	p. 57
	Implant: Ø 4,6/5,5 Platform: CM4,6 (Code 0005)	p. 58
✿ Infra	Implant: Ø 3,3/3,8/4,6 Platform: CM (Code 0004)	p. 57

SOUTHERN IMPLANTS		
✿ Tri-Nex	Implant: Ø 3,5 Platform: 3,5 (Code 0026)	p. 78
	Implant: Ø 4,3 Platform: 4,3 (Code 0027)	p. 80
	Implant: Ø 5 Platform: 5 (Code 0028)	p. 81
	Implant: Ø 6 Platform: 6 (Code 0129)	p. 135
✿ IT Connection	Implant: Ø 3,3/4/4,1/4,9/5 Platform: 4,8 (Code 0037)	p. 86
	Implant: Ø 4,9/5/6 Platform: 6,5 (Code 0096)	p. 123
✿ External Hex	Implant: Ø 3,25 Platform: 3,4 (Code 0003)	p. 56
	Implant: Ø 3,75/4 Platform: 4,1 (Code 0024)	p. 77
	Implant: Ø 4,7/5 Platform: 5 (Code 0058)	p. 104
	Implant: Ø 5,7/6 Platform: 6 (Code 0058)	p.104
✿ Deep Conical	Implant: Ø 3 Platform: 2,45 (Code 0109)	p. 126
	Implant: Ø 3,5/4 Platform: 2,95/3,1 (Code 0004)	p. 57
	Implant: Ø 5 Platform: 4,1 (Code 0005)	p. 58
✿ Internal Hex	Implant: Ø 3,75/4,2/5 Platform: Universal (Code 0040)	p. 89
✿ Compact Conical	Platform: 4,8 (Code 0025)	p. 78

STERNGOLD

✿ Sternex	
Implant: Ø 3,75/4/5	
Platform: 4,1 (Code 0024)	p. 77

STRAUMANN

✿ Tissue Level	
Implant: Ø 3,3/4,1/4,8	
Platform: Regular 4,8 (Code 0037)	p. 86
Implant: Ø 4,8	
Platform: Wide 6,5 (Code 0096)	p. 123

✿ Tissue Level NNC	
Implant: Ø 3,3	
Platform: 3,5 (Code 0160)	p. 148

✿ Synocta	
Implant: Ø 4,8	
Platform: Regular 4,8 (Code 0074)	p. 109
Implant: Ø 6,5	
Platform: Wide 6,5 (Code 0137)	p. 141

✿ Bone Level	
Implant: Ø 3,3	
Platform: NC- 3,3 (Code 0033)	p. 84
Implant: Ø 4,1	
Platform: RC-4,1 (Code 0035)	p. 85
Implant: Ø 4,8	
Platform: RC-4,8 (Code 0035)	p. 85

✿ Bone Level Tapered SC	
Implant: Ø 2,9	
Platform: SC- 2,9 (Code 0135)	p. 139

✿ Screw-Retained	
Implant: Ø Universal	
Platform: NC/RC (Code 0101)	p. 124

✿ BLX	
Implant: Ø 3,5/3,75/4/4,5	
Platform: RB (Regular Base) (Code 0207)	p. 176

Implant: Ø 5/5,5/6,5	
Platform: WB (Wide Base) (Code 0208)	p. 177

✿ TLX/TLXS	
Implant: Ø 5,5/6,5	
Platform: WT (Code 0262)	p. 182

SYBRON IMPLANT SOLUTIONS

✿ Endopore (Innova)	
Implant: Ø 4,1	
Platform: 4,1 (Code 0024)	p. 77

SYSTHEX

✿ Classic-ci / Estetic-ci	
Implant: Ø 3,5/3,75/4	
Platform: 4,1 (Code 0024)	p. 77

TITANIUM-FIX

✿ b-fix	
Implant: Ø 3,5/4	
Platform: Regular (Code 0004)	p. 57
Implant: Ø 4,5/5	
Platform: Larga (Code 0005)	p. 58

TBR

✿ Hex-Conic	
Implant: Ø 3,5	
Platform: Narrow (Code 0023)	p. 76
Implant: Ø 5	
Platform: Wide (Code 0058)	p. 60

✿ Connect/Infinity	
Implant: Ø 3,5	
Platform: 3,5 (Code 0266)	p. 183

Implant: Ø 4	
Platform: 4 (Code 0267)	p. 184

Implant: Ø 5	
Platform: 4 (Code 0268)	p. 185

TRE-OSS

✿ Anatomic / HS	
Implant: Ø 3,5	
Platform: 3,5 Rosa (Code 0026)	p. 79
Implant: Ø 4,3	
Platform: 4,3 Amarillo (Code 0027)	p. 80
Implant: Ø 5	
Platform: 5 Azul (Code 0028)	p. 81

✿ Multi-Unit	
Platform: Universal (Code 0025)	p. 78

✿ Rapid / Anatomic	
Implant: Ø 3,5	
Platform: 3,5 Rosa (Code 0023)	p. 76
Implant: Ø 3,75/4	
Platform: 4,31Amarillo (Code 0024)	p. 77
Implant: Ø 5	
Platform: 5 Azul (Code 0061)	p. 107

✿ Simple	
Implant: Ø 3,3/3,75/5	
Platform: 3,75 Amarillo (Code 0040)	p. 89

TRI DENTAL IMPLANTS

✿ TRI-Vent	
Implant: Ø 3,75/4,1/4,7	
Platform: 3,5 (Code 0040)	p. 89

TRINON

✿ Q2	
Implant: Ø 3,5/3,75/4,5	
Platform: 4 (Code 0024)	p. 77

✿ QK	
Implant: Ø 4	
Platform: 4,8 (Code 0074)	p. 109
Implant: Ø 4	
Platform: 4,8 (Code 0037)	p. 86

UFIT

✿ Gt2	
Implant: Ø 3,5	
Platform: Mini (Code 0004)	p. 57
Implant: Ø 4/4,5	
Platform: Regular (Code 0005)	p. 58
Implant: Ø 5	
Platform: Wide (Code 0005)	p. 58
Implant: Ø 5,5/6/6,5/7	
Platform: Ultra-wide (Code 0005)	p. 58

✿ Nt2	
Implant: Ø 3,5	
Platform: Mini (Code 0004)	p. 57
Implant: Ø 4/4,5	
Platform: Regular (Code 0005)	p. 58
Implant: Ø 5	
Platform: Wide (Code 0005)	p. 58
Implant: Ø 5,5/6/6,5/7	
Platform: Ultra-wide (Code 0005)	p. 58

VULKAN IMPLANTS

✿ IN-Hex	
Implant: Ø 3,3/3,75/4,2/5	
Platform: 3,75 (Code 0040)	p. 89

XIVE

✿ Xive	
Implant: Ø 3	
Platform: 3 (Code 0084)	p. 115
Implant: Ø 3,4	
Platform: 3,4 (Code 0038)	p. 87
Implant: Ø 3,8	
Platform: 3,8 (Code 0039)	p. 88
Implant: Ø 4,5	
Platform: 4,5 (Code 0085)	p. 116
Implant: Ø 5,5	
Platform: 5,5 (Code 0086)	p. 117

YES IMPLANT

✿ S-SYSTEM	
Implant: Ø 3,3/3,5	
Platform: Narrow (Code 0030)	p. 83
Implant: Ø 4/4,5	
Platform: Regular (Code 0030)	p. 83
Implant: Ø 5/5,5	
Platform: Wide (Code 0030)	p. 83

ZIACOM (OSSEOLIFE)

✿ OEX	
Implant: Ø 3,75/4,25	
Platform: RP 4,1 (Code 0024)	p. 77

ZIMMER

✿ Eztetic	
Implant: Ø 3,1	
Platform: 2,9 (Code 0178)	p. 160
✿ Screw-Vent	
Implant: Ø 3,7/4,1	
Platform: 3,5 (Code 0040)	p. 89
Implant: Ø 4,7	
Platform: 4,5 (Code 0041)	p. 91
Implant: Ø 6	
Platform: 5,7 (Code 0080)	p. 111

✿ Swiss-Plus	
Implant: Ø 3,7/4,1/4,8	
Platform: 4,8 (Code 0074)	p. 109
Implant: Ø 3,7/4,1/4,8	
Platform: 4,8 (Code 0037)	p. 86
✿ Tapered Abutment Multi Unit	
Implant: Ø Universal	
Platform: Universal (Code 0205)	p. 175

COMPATIBLE with 0001

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,3 mm				1,2 mm				2 mm				3 mm	
R	31.322.001.01-2	43°	25°	31.322.001.02-2	25°	-		31.322.001.03-2	25°	-		-	-
NR	31.312.001.01-2			31.312.001.02-2				31.312.001.03-2				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
0,3 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.322.001.21-2	25°	20°	10°
NR	31.312.001.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	COBALT-CHROME		α_{dp}	DYNAMIC MILLING TOOL		SHANK	α_{di}	SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG				DYNAMIC MILLING TOOL	SHANK	α_{di}		
52.410.103.01-2	10	50.312.001.01-2	43.621.410.01-2 43.624.410.01-2	34.612.001.01-2	32.212.001.02-2		25°	33.390.754.01-2	3	25°		23.412.001.01-2
								33.490.754.01-2	4			
52.412.103.01-2	12							33.690.754.01-2	6			

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG		LAB SCANBODY	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20				
41.316.084.01-2	-	43.618.201.01-2	18	40.316.003.01-2	43.601.103.02-2	22.612.001.01-2		30.412.001.01-2	
		43.624.201.01-2	24						
		43.632.201.01-2	32						



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0001	LAB SCANBODY	DAS_C_E_0001
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0001 DAS_IG_10_0001	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0001 DAS_C_IG_10_0001
	DAS_I_12_0001 DAS_IG_10_0001		DAS_C_I_12_0001 DAS_C_IG_12_0001
	SCANALOG	SCANALOG	DAS_C_SA_0001

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0002

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,3 mm				1,2 mm				mm				mm	
R	31.323.002.01-2	45°	20°	31.323.002.02-2	25°	-		-	-	-	-	-	-
NR	31.313.002.01-2			31.313.002.02-2				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
0,3 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.323.002.21-2	25°	20°	10°
NR	31.313.002.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	COBALT-CHROME		α_{dp}	DYNAMIC MILLING TOOL		SHANK	α_{di}	SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG				DYNAMIC MILLING TOOL	SHANK	α_{di}		
52.408.101.01-2	8	50.313.002.01-2	43.621.410.01-2 43.624.410.01-2	34.613.002.01-2	32.213.002.02-2		30°	33.390.805.01-2	3	30°		23.413.002.01-2
52.410.101.01-2	10							33.490.805.01-2	4			
52.412.101.01-2	12							33.690.805.01-2	6			

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG		LAB SCANBODY	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20				
41.316.084.01-2	-	43.618.201.01-2	18	40.316.003.01-2	43.601.103.02-2	22.613.002.01-2		30.413.002.01-2	
		43.624.201.01-2	24						
		43.632.201.01-2	32						



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0002	LAB SCANBODY	DAS_C_E_0002
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0002	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0002
	DAS_I_10_0002		DAS_C_I_10_0002
	DAS_I_12_0002		DAS_C_I_12_0002
	SCANALOG	SCANALOG	DAS_C_SA_0002

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0003

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
0,3 mm				0,5 mm				mm				mm			
R	31.322.003.01-2	45°	30°	31.322.003.02-2	25°	-	-	-	-	-	-	-	-	-	-
NR	31.312.003.01-2			31.312.003.02-2			-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
1 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.322.003.23-2	30°	25°	15°
NR	31.312.003.23-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.104.01-2	10	50.312.003.01-2	43.621.410.01-2 43.624.410.01-2	34.612.003.01-2	-	-	33.390.716.01-2	3	25°
							33.490.716.01-2	4	
52.412.104.01-2	12						33.690.716.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG		LAB SCANBODY	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20				
41.320.065.01-2	-	43.618.201.01-2	18	40.320.003.02-2	43.601.103.02-2				
		43.624.201.01-2	24						
		43.632.201.01-2	32						

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0003	LAB SCANBODY	DAS_C_E_0003
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0003	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0003
	DAS_I_12_0003		DAS_C_I_12_0003

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0004

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
1 mm				2 mm				3 mm				4 mm			
R	31.323.004.01-2	45°	29°	31.323.004.02-2	30°	20°	-	31.323.004.03-2	25	-	-	31.323.004.04-2	20	-	-
NR	31.313.004.01-2			31.313.004.02-2				31.313.004.03-2				31.313.004.04-2			



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
1 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.323.004.21-2	25°	20°	10°
NR	31.313.004.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}	
52.410.103.01-2	10	50.313.004.01-2 50.313.004.03-2 (IG=3mm)	43.620.411.01-2 43.621.410.01-2 43.624.410.01-2	34.613.004.01-2 (1) 34.613.004.02-2 (2)	32.213.004.02-2	25°	33.390.754.01-2	3	25°	23.413.004.02-2
							33.490.754.01-2	4		
52.412.103.01-2	12						33.690.754.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG		LAB SCANBODY	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27				
41.316.076.01-2	-	43.618.201.01-2	18	40.316.005.02-2	43.601.105.01-2				
		43.624.201.01-2	24						
		43.632.201.01-2	32						

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0004	LAB SCANBODY	DAS_C_E_0004
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0004 DAS_IG_10_0004	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0004 DAS_C_IG_10_0004
	DAS_I_12_0004 DAS_IG_12_0004		DAS_C_I_12_0004 DAS_C_IG_12_0004
SCANALOG	DAS_SA_0004	SCANALOG	DAS_C_SA_0004

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0005

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1 mm				2 mm				3 mm				4 mm	
R	31.324.005.01-2	38°	23°	31.324.005.02-2	25°	15°	-	31.324.005.03-2	20	-	-	-	-
NR	31.314.005.01-2			31.314.005.02-2				31.314.005.03-2				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
1 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.324.005.21-2	25°	20°	10°
NR	31.314.005.21-2			





DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	COBALT-CHROME		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG			DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.102.01-2	10	50.314.005.01-2 50.314.005.03-2 (IG=3mm)	43.620.411.01-2	34.614.005.01-2	-	-	33.390.958.01-2	3	30°
			43.621.410.01-2				33.490.958.01-2	4	
52.412.102.01-2	12		43.624.410.01-2				33.690.958.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27		LAB SCANBODY
41.320.090.01-2	-	43.618.201.01-2	18	40.320.005.03-2	43.601.105.01-2	22.614.005.01-2	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0005	LAB SCANBODY	DAS_C_E_0005
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0005	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0005
	DAS_IG_10_0005		DAS_C_IG_10_0005
	DAS_I_12_0005		DAS_C_I_12_0005
	DAS_IG_12_0005		DAS_C_IG_12_0005

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation
R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0006

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1,2 mm				2 mm				3 mm				4 mm	
R	31.322.006.01-2	40°	20°	31.322.006.02-2	25	-	-	31.322.006.03-2	20	-	-	31.322.006.04-2	15
NR	31.312.006.01-2			31.312.006.02-2				31.312.006.03-2				31.312.006.04-2	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	31.322.006.21-2	30°	20°	15°
NR	31.312.006.21-2			





DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	COBALT-CHROME		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG			DYNAMIC MILLING TOOL	SHANK	α_{di}	
52.410.105.01-2	10	50.312.006.01-2 50.312.006.03-2 (IG=3mm)	43.621.410.01-2	34.612.006.01-2	32.212.006.02-2	25°	33.330.734.01-2	3	25°	23.412.006.01-2
			43.624.410.01-2				33.430.734.01-2	4		
52.412.105.01-2	12						33.630.734.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27		LAB SCANBODY
41.316.072.01-2	-	43.618.201.01-2	18	40.316.005.01-2	43.601.105.01-2	22.612.006.01-2	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0006	LAB SCANBODY	DAS_C_E_0006
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0006	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0006
	DAS_IG_10_0006		DAS_C_IG_10_0006
	DAS_I_12_0006		DAS_C_I_12_0006
	DAS_IG_12_0006		DAS_C_IG_12_0006
SCANALOG	DAS_SA_0006	SCANALOG	DAS_C_SA_0006

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation
R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0007

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1,5 mm				2 mm				mm				mm	
R	31.323.007.01-2	38°	17°	31.323.007.02-2	25°	-	-	-	-	-	-	-	-
NR	31.313.007.01-2			31.313.007.02-2				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
1,5 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.323.007.21-2	25°	20°	10°
NR	31.313.007.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.408.101.01-2	8	50.313.007.01-2 50.313.007.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2	34.613.007.01-2	32.213.007.02-2	25°	33.350.775.01-2	3	25°
52.410.101.01-2	10						33.450.775.01-2	4	
52.412.101.01-2	12						33.650.775.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	LAB SCANBODY	
41.318.074.01-2	-	43.618.201.01-2	18	40.318.005.02-2	43.601.105.01-2	22.613.007.01-2	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0007	LAB SCANBODY	DAS_C_E_0007
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0007 DAS_IG_8_0007	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0007 DAS_C_IG_8_0007
	DAS_I_10_0007 DAS_IG_10_0007		DAS_C_I_10_0007 DAS_C_IG_10_0007
	DAS_I_12_0007 DAS_IG_12_0007		DAS_C_I_12_0007 DAS_C_IG_12_0007

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0008

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,5 mm				mm				mm				mm	
R	31.323.008.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-
NR	-			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
0,5 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.323.008.21-2	25°	20°	10°
NR	-			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}	
52.408.113.01-2	8	50.313.008.01-2	43.621.410.01-2 43.624.410.01-2	34.613.008.01-2	-	-	33.370.716.01-2	3	30°	23.413.008.01-2
							33.470.716.01-2	4		
							33.670.716.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	LAB SCANBODY	
41.318.045.01-2	-	43.618.201.01-2	18	40.318.005.01-2	43.601.105.01-2	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0008	LAB SCANBODY	DAS_C_E_0008
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0008	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0008
SCANALOG	DAS_SA_0008	SCANALOG	DAS_C_SA_0008

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0009

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,3 mm				0,5 mm				1 mm				mm	
R	31.322.009.01-2	45°	25°	31.322.009.02-2	25°	25°		31.322.009.03-2	25°	-	-	-	-
NR	31.312.009.01-2			31.312.009.02-2				31.312.009.03-2				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.114.01-2	10	50.312.009.01-2	43.621.410.01-2 43.624.410.01-2	34.612.009.01-2	-	-	33.390.716.01-2	3	25°
							33.490.716.01-2	4	
52.412.114.01-2	12						33.690.716.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	ANALOG	LAB SCANBODY
41.320.051.01-2	-	43.618.201.01-2	18	40.320.003.01-2	43.601.103.02-2	22.612.009.01-2	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0009	LAB SCANBODY	DAS_C_E_0009
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0009	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0009
	DAS_I_12_0009		DAS_C_I_12_0009

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0010

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,3 mm				mm				mm				mm	
R	31.323.010.01-2	45°	29°	-	-	-	-	-	-	-	-	-	-
NR	31.313.010.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.115.01-2	10	50.313.010.01-2	43.621.410.01-2 43.624.410.01-2	34.613.010.01-2	-	-	33.390.716.01-2	3	30°
							33.490.716.01-2	4	
52.412.115.01-2	12	50.313.010.04-2 (IG=3mm)					33.690.716.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	ANALOG	LAB SCANBODY
41.318.065.01-2	-	43.618.201.01-2	18	40.318.003.01-2	43.601.103.02-2	22.613.010.01-2	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0010	LAB SCANBODY	DAS_C_E_0010
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0010 DAS_IG_10_0010	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0010 DAS_C_IG_10_0010
	DAS_I_12_0010 DAS_IG_12_0010		DAS_C_I_12_0010 DAS_C_IG_12_0010

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0011

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,3 mm				mm				mm				mm	
R	31.322.011.01-2	25°	29°	-	-	-	-	-	-	-	-	-	-
NR	31.312.011.01-2			-				-				-	

DYNAMIC 3TIBASE®								
GINGIVAL HEIGHT		α_s	α_s	α_s	GINGIVAL HEIGHT		α_s	α_s
2mm		CH=5mm	CH= 7mm	CH= 9mm	3mm		CH=5mm	CH= 7mm
R		25°	20°	15°	-	31.312.011.24-2	25°	20°
NR	31.312.011.23-2				-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.108.01-2	10	50.312.011.01-2	43.621.410.01-2 43.624.410.01-2	34.612.011.01-2	-	-	33.345.804.01-2	3	20°
							33.445.804.01-2	4	
52.412.108.01-2	12						33.645.804.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	LAB SCANBODY	
41.316.094.01-2	-	43.618.201.01-2	18	40.316.005.04-2	43.601.105.01-2	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0011	LAB SCANBODY	DAS_C_E_0011
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0011	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0011
	DAS_I_12_0011		DAS_C_I_12_0011

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0012

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,3 mm				mm				mm				mm	
R	31.323.012.01-2	25°	30°	-	-	-	-	-	-	-	-	-	-
NR	31.313.012.01-2			-				-				-	

DYNAMIC 3TIBASE®							
GINGIVAL HEIGHT		α_s	α_s	α_s	GINGIVAL HEIGHT		α_s
0,3 mm		CH=5mm	CH= 7mm	CH= 9mm	3mm		CH=5mm
R	-	25°	25°	15°	-	31.313.012.24-2	25°
NR	31.313.012.21-2				-		

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.109.01-2	10	50.313.012.01-2	43.621.410.01-2 43.624.410.01-2	34.613.012.01-2	-	-	33.345.804.01-2	3	20°
							33.445.804.01-2	4	
52.412.109.01-2	12						33.645.804.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	LAB SCANBODY	
41.316.094.01-2	-	43.618.201.01-2	18	40.316.005.04-2	43.601.105.01-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0012	LAB SCANBODY	DAS_C_E_0012
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0012	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0012
	DAS_I_12_0012		DAS_C_I_12_0012

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0013

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
0,7 mm				mm				mm				mm			
R	31.323.013.01-2	43°	23°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.313.013.01-2			-			-		-						



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-	-	-	-	-	-	-
-	-							-	-	
-	-							-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	ANALOG	LAB SCANBODY
41.320.074.01-2	-	43.618.201.01-2	18	40.320.007.02-2	43.601.107.01-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0013	LAB SCANBODY	DAS_C_E_0013
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0014

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
1,2 mm				2 mm				3 mm				mm			
R	31.322.014.01-2	41°	23°	31.322.014.02-2	25°	17°	-	20°	25°	-	-	-	-	-	-
NR	31.312.014.01-2			31.312.014.02-2			-			-			-		



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}	
52.410.128.01-2	10	50.312.014.03-2 (IG=3mm)	43.621.415.01-2	34.612.014.01-2	-	-	-	33.345.804.01-2	3	25°	23.412.014.01-2
-	-							33.445.804.01-2	4		
-	-							33.645.804.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	ANALOG	LAB SCANBODY
41.314.067.01-2	41.314.105.01-2	43.618.201.01-2	18	40.314.003.04-2	43.601.103.02-2	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0014	LAB SCANBODY	DAS_C_E_0014
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_IG_10_0014	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_IG_10_0014
SCANALOG	DAS_SA_0014	SCANALOG	DAS_C_SA_0014

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0015

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1,7 mm				2,5 mm				3 mm				4 mm	
R	31.323.015.01-2	43°	23°	31.323.015.02-2	25°	15°	-	31.323.015.03-2	25°	-	20°	31.323.015.04-2	15°
NR	31.313.015.01-2			31.313.015.02-2				31.313.015.03-2				31.313.015.04-2	



DYNAMIC 3TIBASE®							
GINGIVAL HEIGHT		α_s	α_s	α_s	GINGIVAL HEIGHT		α_s
1,7 mm		CH=5mm	CH= 7mm	CH= 9mm	2,5 mm		CH=5mm
R	31.323.015.21-2	30°	25°	10°	31.323.015.22-2	25°	20°
NR	31.313.015.21-2				31.313.015.22-2		





DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.104.01-2	10	50.313.015.01-2	43.621.410.01-2 43.624.410.01-2	34.613.015.01-2	-	-	33.390.805.01-2	3	25°
							33.490.805.01-2	4	
52.412.104.01-2	12						33.690.805.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20		LAB SCANBODY
41.318.075.01-2	-	43.618.201.01-2	18	40.318.003.02-2	43.601.103.02-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0015	LAB SCANBODY	DAS_C_E_0015
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0015 DAS_IG_10_0015	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0015 DAS_C_IG_10_0015
	DAS_I_12_0015 DAS_IG_12_0015		DAS_C_I_12_0015 DAS_C_IG_12_0015
SCANALOG	DAS_SA_0015	SCANALOG	DAS_C_SA_0015

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptador (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation
R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0016

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,8 mm				1,5 mm				mm				mm	
R	31.322.016.01-2	45°	28°	31.322.016.02-2	25°	-	-	-	-	-	-	-	-
NR	31.312.016.01-2			31.312.016.02-2				-				-	



DYNAMIC 3TIBASE®			
GINGIVAL HEIGHT		α_s	α_s
1,5 mm		CH=5mm	CH= 9mm
R	-	25°	15°
NR	31.312.016.22-2		





DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL	
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK
52.408.106.01-2	8	50.312.016.01-2	43.621.410.01-2 43.624.410.01-2	34.612.016.01-2	-	-	33.360.754.01-2	3
52.410.106.01-2	10						33.460.754.01-2	4
52.412.106.01-2	12	50.312.016.04-2 (IG=3mm)					33.660.754.01-2	6

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27		LAB SCANBODY
41.316.071.01-2	-	43.618.201.01-2	18	40.316.005.05-2	43.601.105.01-2	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0016	LAB SCANBODY	DAS_C_E_0016
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0016 DAS_IG_8_0016	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0016 DAS_C_IG_8_0016
	DAS_I_10_0016 DAS_IG_10_0016		DAS_C_I_10_0016 DAS_C_IG_10_0016
	DAS_I_12_0016 DAS_IG_12_0016		DAS_C_I_12_0016 DAS_C_IG_12_0016

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptador (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation
R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0017

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
0,7 mm				1,5 mm				mm				mm			
R	31.323.017.01-2	45°	24°	31.323.017.02-2	25°	-	-	-	-	-	-	-	-	-	-
NR	31.313.017.01-2			31.313.017.02-2			-	-	-			-			



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
0,7 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.323.017.21-2	30°	25°	15°
NR	31.313.017.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.408.101.01-2	8	50.313.017.01-2	43.621.410.01-2 43.624.410.01-2	34.613.017.01-2	-	-	33.360.756.01-2	3	30°
52.410.101.01-2	10						33.460.756.01-2	4	
52.412.101.01-2	12						33.660.756.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27		LAB SCANBODY
41.317.073.01-2	-	43.618.201.01-2	18	40.317.005.01-2	43.601.105.01-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0017	LAB SCANBODY	DAS_C_E_0017
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0017 DAS_IG_8_0017	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0017 DAS_C_IG_8_0017
	DAS_I_10_0017 DAS_IG_10_0017		DAS_C_I_10_0017 DAS_C_IG_10_0017
	DAS_I_12_0017 DAS_IG_12_0017		DAS_C_I_12_0017 DAS_C_IG_12_0017

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptador (3mm)

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0018

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
1,2 mm				mm				mm				mm			
R	31.324.018.01-2	39°	18°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.314.018.01-2			-			-		-						



DYNAMIC 3TIBASE®			
GINGIVAL HEIGHT		α_s	α_s
		CH=5mm	CH= 7mm
R	-	-	-
NR	-		

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.102.01-2	10	50.314.018.01-2	43.621.410.01-2 43.624.410.01-2	34.614.018.01-2	-	-	33.360.756.01-2	3	30°
							33.460.756.01-2	4	
52.412.102.01-2	12						33.660.756.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27		LAB SCANBODY
41.317.073.01-2	-	43.618.201.01-2	18	40.317.005.01-2	43.601.105.01-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0018	LAB SCANBODY	DAS_C_E_0018
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0018	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0018
	DAS_I_12_0018		DAS_C_I_12_0018

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0019

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,8 mm				mm				mm				mm	
R	31.322.019.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-
NR	31.312.019.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME		DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.105.01-2	10	50.312.019.01-2	43.621.410.01-2 43.624.410.01-2	34.612.019.01-2	-	-	33.360.754.01-2	3	25°
							33.460.754.01-2	4	
52.412.105.01-2	12						33.660.754.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	ANALOG	LAB SCANBODY
41.316.071.01-2	-	43.618.201.01-2	18	40.316.005.05-2	43.601.105.01-2	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0019	LAB SCANBODY	DAS_C_E_0019
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0019	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0019
	DAS_I_12_0019		DAS_C_I_12_0019

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0020

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,6 mm				mm				mm				mm	
R	31.323.020.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-
NR	-			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME		DYNAMIC MILLING TOOL	SHANK	α_{di}
52.408.112.01-2	8	50.313.020.01-2	43.620.411.01-2	34.613.020.01-2	-	-	33.390.716.01-2	3	30°
-	10						33.490.716.01-2	4	
-	12						33.690.716.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	ANALOG	LAB SCANBODY
41.316.044.01-2	-	43.618.201.01-2	18	40.316.005.06-2	43.601.105.01-2	-	30.413.005.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0020	LAB SCANBODY	DAS_C_E_0020
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0020	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0020

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0021

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
1,5 mm				2 mm				3 mm				4 mm			
R	31.322.021.01-2	43°	24°	31.322.021.02-2	25°	20°		31.322.021.03-2	20°	25°		31.322.021.04-2	15°	25°	
NR	31.312.021.01-2			31.312.021.02-2				31.312.021.03-2				31.312.021.04-2			



DYNAMIC 3TIBASE®							
GINGIVAL HEIGHT		α _s	α _s	α _s	GINGIVAL HEIGHT		α _s
1,5 mm		CH=5mm	CH= 7mm	CH= 9mm	3 mm		CH=5mm
R	31.322.021.21-2	25°	20°	10°	31.322.021.23-2	25°	20°
NR	31.312.021.21-2				31.312.021.23-2		



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}
52.410.103.01-2	10	50.312.021.01-2	43.621.410.01-2 43.624.410.01-2	34.612.021.01-2	32.212.021.02-2	25°	33.335.754.01-2	3	25°
							33.435.754.01-2	4	
52.412.103.01-2	12	50.312.021.03-2 (IG=3mm)					33.635.754.01-2	6	



DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER UNIGRIP		LAB SCANBODY
41.316.073.01-2	41.316.108.01-2	43.618.201.01-2	18	40.316.008.02-2	43.601.108.01-2	22.612.021.01-2	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0021	LAB SCANBODY	DAS_C_E_0021
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0021 DAS_IG_10_0021	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0021 DAS_C_IG_10_0021
	DAS_I_12_0021 DAS_IG_12_0021		DAS_C_I_12_0021 DAS_C_IG_12_0021
SCANALOG	DAS_SA_0021	SCANALOG	DAS_C_SA_0021

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
α_s = Standard maximum angulation
α_c = Captive maximum angulation
α_{di} = Direct to implant maximum angulation
α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0022

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
1,3 mm				2 mm				3 mm				4 mm			
R	31.323.022.01-2	40°	19°	31.323.022.02-2	25°	14°		31.323.022.03-2	20°	30°		31.323.022.04-2	15	30	
NR	31.313.022.01-2			31.313.022.02-2				31.313.022.03-2				31.313.022.04-2			



DYNAMIC 3TIBASE®							
GINGIVAL HEIGHT		α _s	α _s	α _s	GINGIVAL HEIGHT		α _s
1,3 mm		CH=5mm	CH= 7mm	CH= 9mm	3 mm		CH=5mm
R	31.323.022.21-2	30°	25°	10°	31.323.022.23-2	20°	20°
NR	31.313.022.21-2				31.313.022.23-2		



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}
52.408.101.01-2	8	50.313.022.01-2	43.621.410.01-2 43.624.410.01-2	34.613.022.01-2	32.213.022.02-2	30°	33.335.758.01-2	3	30°
52.410.101.01-2	10						33.435.758.01-2	4	
52.412.101.01-2	12	50.313.022.03-2 (IG=3mm)					33.635.758.01-2	6	



DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER UNIGRIP		LAB SCANBODY
41.320.075.01-2	41.320.117.01-2	43.618.201.01-2	18	40.320.008.02-2	43.601.108.01-2	22.613.022.01-2	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0022	LAB SCANBODY	DAS_C_E_0022
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0022 DAS_IG_8_0022	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0022 DAS_C_IG_8_0022
	DAS_I_10_0022 DAS_IG_10_0022		DAS_C_I_10_0022 DAS_C_IG_10_0022
SCANALOG	DAS_I_12_0022 DAS_IG_12_0022		DAS_C_I_12_0022 DAS_C_IG_12_0022
	DAS_SA_0022	SCANALOG	DAS_C_SA_0022

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
α_s = Standard maximum angulation
α_c = Captive maximum angulation
α_{di} = Direct to implant maximum angulation
α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0023

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,3 mm				mm				mm				mm	
R	31.322.023.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-
NR	31.312.023.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}	
52.410.103.01-2	10	50.312.023.01-2	43.621.410.01-2 43.624.410.01-2	34.612.023.01-2	-	-	33.390.805.01-2	3	25°	23.412.023.01-2
							33.490.805.01-2	4		
52.412.103.01-2	12						33.690.805.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER UNIGRIP	LAB SCANBODY	
41.316.059.01-2	-	43.618.201.01-2	18	40.316.008.01-2	43.601.108.01-2	22.612.023.01-2 30.412.001.01-2	
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0023	LAB SCANBODY	DAS_C_E_0023
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0023	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0023
	DAS_I_12_0023		DAS_C_I_12_0023
SCANALOG	DAS_SA_0023	SCANALOG	DAS_C_SA_0023

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0024

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,3 mm				0,5 mm				mm				mm	
R	31.323.024.01-2	45°	30°	31.323.024.02-2	30°	30°	-	-	-	-	-	-	-
NR	31.313.024.01-2			31.313.024.02-2				-				-	



DYNAMIC 3TIBASE®												
GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	GINGIVAL HEIGHT	α_s	α_s	α_s	GINGIVAL HEIGHT	GINGIVAL HEIGHT	α_s	α_s	α_s	
0,3 mm	0,5 mm	1 mm	2 mm	CH 5mm	CH 7mm	CH 9mm	3 mm	4 mm	CH 5mm	CH 7mm	CH 9mm	
R	31.323.024.21-2	31.323.024.22-2	31.323.024.23-2	31.323.024.24-2	30°	25°	10°	31.323.024.25-2	31.323.024.26-2	25°	20°	15°
NR			31.313.024.23-2	31.313.024.24-2				31.313.024.25-2	31.313.024.26-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG	
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME		α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}	
52.408.101.01-2	8	50.313.024.01-2	43.621.410.01-2 43.624.410.01-2	34.613.024.01-2	-		-	33.390.716.01-2	3	30°	23.413.024.01-2
52.410.101.01-2	10							33.490.716.01-2	4		
52.412.101.01-2	12							33.690.716.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER UNIGRIP	LAB SCANBODY	
41.320.060.01-2	-	43.618.201.01-2	18	40.320.008.01-2	43.601.108.01-2	22.613.024.01-2 30.413.002.01-2	
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0024	LAB SCANBODY	DAS_C_E_0024
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0024	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0024
	DAS_I_10_0024		DAS_C_I_10_0024
	DAS_I_12_0024		DAS_C_I_12_0024
	DAS_SA_0024		DAS_C_SA_0024

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0025

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,3 mm				mm				mm				mm			
R	31.323.025.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-
NR	-			-			-			-					



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
0,3 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.323.025.21-2	30°	25°	10°
NR	-			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}	
52.408.112.01-2	8	50.313.025.02-2	43.620.411.01-2	34.613.025.01-2	-	-	33.390.716.01-2	3	30°	23.413.025.01-2
52.410.111.01-2	10	50.313.025.01-2	43.621.410.01-2 43.624.410.01-2				33.490.716.01-2	4		
							33.690.716.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG		LAB SCANBODY	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER UNIGRIP				
41.314.039.01-2	-	43.618.201.01-2	18	40.314.008.01-2	43.601.108.01-2	22.613.025.01-2	30.413.005.01-2		
		43.624.201.01-2	24						
		43.632.201.01-2	32						

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0025	LAB SCANBODY	DAS_C_E_0025
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0025	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0025
	DAS_I_10_0025		DAS_C_I_10_0025
SCANALOG	DAS_SA_0025	SCANALOG	DAS_C_SA_0025

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

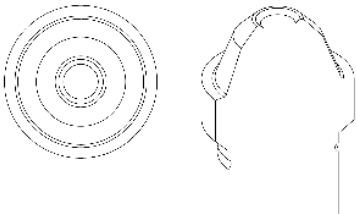

COMPATIBLE with 0026

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
0,5 mm				1,2 mm				mm				mm			
R	31.322.026.01-2	45°	29°	31.322.026.02-2	25°	22°	-	-	-	-	-	-	-	-	-
NR	31.312.026.01-2			31.312.026.02-2			-			-					



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
0,5 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.322.026.21-2	25°	20°	10°
NR	31.312.026.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}
52.410.108.01-2	10	50.312.026.01-2	43.621.410.01-2 43.624.410.01-2	34.612.026.01-2	-	-	33.390.805.01-2	3	25°
							33.490.805.01-2	4	
52.412.108.01-2	12						33.690.805.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG		LAB SCANBODY	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER UNIGRIP				
41.318.075.01-2	-	43.618.201.01-2	18	40.318.008.01-2	43.601.108.01-2	22.612.026.01-2	30.412.001.01-2		
		43.624.201.01-2	24						
		43.632.201.01-2	32						

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0026	LAB SCANBODY	DAS_C_E_0026
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0026	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0026
	DAS_I_12_0026		DAS_C_I_12_0026

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

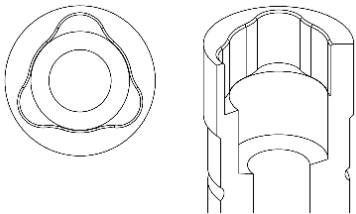

COMPATIBLE with 0027

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,3 mm				1,2 mm				mm				mm	
R	31.323.027.01-2	35°	29°	31.323.027.02-2	25°	22°		-				-	
NR	31.313.027.01-2			31.313.027.02-2				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
0,3 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.323.027.21-2	25°	20°	10°
NR	31.313.027.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.109.01-2	10	50.313.027.01-2	43.621.410.01-2 43.624.410.01-2	34.613.027.01-2	-	-	33.390.958.01-2	3	30°
							33.490.958.01-2	4	
52.412.109.01-2	12						33.690.958.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER UNIGRIP		LAB SCANBODY
41.320.090.01-2	-	43.618.201.01-2	18	40.320.008.03-2	43.601.108.01-2	22.613.027.01-2	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0027	LAB SCANBODY	DAS_C_E_0027
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0027	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0027
	DAS_I_12_0027		DAS_C_I_12_0027

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0028

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,3 mm				mm				mm				mm	
R	31.324.028.01-2	35°	30°	-				-				-	
NR	31.314.028.01-2			-				-				-	



DYNAMIC 3TIBASE®			
GINGIVAL HEIGHT		α_s	α_s
		CH=5mm	CH= 7mm
R	-	-	-
NR	-		

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.109.01-2	10	50.314.028.01-2	43.621.410.01-2 43.624.410.01-2	34.614.028.01-2	-	-	33.390.958.01-2	3	30°
							33.490.958.01-2	4	
52.412.109.01-2	12						33.690.958.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER UNIGRIP		LAB SCANBODY
41.320.090.01-2	-	43.618.201.01-2	18	40.320.008.03-2	43.601.108.01-2	22.614.028.01-2	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0028	LAB SCANBODY	DAS_C_E_0028
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0028	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0028
	DAS_I_12_0028		DAS_C_I_12_0028

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0029

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
1,2 mm				2 mm				3 mm				4 mm			
R	31.322.029.01-2	30°	23°	31.322.029.02-2	25°	15°	31.322.029.03-2	20	25	31.322.029.04-2	15°	25°	-	-	-
NR	31.312.029.01-2			31.312.029.02-2			31.312.029.03-2			31.312.029.04-2			-		



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
2 mm		CH=5mm	CH= 7mm	CH= 9mm
R	-	25°	20°	15°
NR	31.312.029.22-2			





DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}	
52.410.103.01-2	10	50.312.029.01-2 50.312.029.03-2 (IG=3mm)	43.621.410.01-2	34.613.029.01-2	-	-	33.345.804.01-2	3	20°	23.412.029.01-2
			43.624.410.01-2				33.445.804.01-2	4		
52.412.103.01-2	12						33.645.804.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	LAB SCANBODY	
41.316.094.01-2	41.316.132.01-2	43.618.201.01-2	18	40.316.003.02-2	43.601.103.02-2	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0029	LAB SCANBODY	DAS_C_E_0029
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0029 DAS_IG_10_0029	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0029 DAS_C_IG_10_0029
	DAS_I_12_0029 DAS_IG_12_0029		DAS_C_I_12_0029 DAS_C_IG_12_0029
	SCANALOG	SCANALOG	DAS_C_SA_0029

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation
R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0030

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
1,1 mm				2 mm				3 mm				4 mm			
R	31.323.030.01-2	42°	25°	31.323.030.02-2	25°	15°	31.323.030.03-2	20°	30°	31.323.030.04-2	15°	30°	-	-	-
NR	31.313.030.01-2			31.313.030.02-2			31.313.030.03-2			31.313.030.04-2			-		



DYNAMIC 3TIBASE®							
GINGIVAL HEIGHT		α_s	α_s	α_s	GINGIVAL HEIGHT		α_s
1,1 mm		CH=5mm	CH= 7mm	CH= 9mm	3 mm		CH=5mm
R	31.323.030.21-2	25°	20°	10°	31.323.030.23-2	25°	20°
NR	31.313.030.21-2				31.313.030.23-2		





DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME		α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}
52.408.101.01-2	8	50.313.030.01-2 50.313.030.03-2 (IG=3mm)	43.621.410.01-2	34.613.030.01-2	32.213.030.02-2		25°	33.345.808.01-2	3	30°
52.410.101.01-2	10		43.624.410.01-2					33.445.808.01-2	4	
52.412.101.01-2	12							33.645.808.01-2	6	
								23.413.030.01-2		

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	LAB SCANBODY	
41.320.079.01-2	41.320.125.01-2	43.618.201.01-2	18	40.320.003.04-2	43.601.103.02-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0030	LAB SCANBODY	DAS_C_E_0030
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0030 DAS_IG_8_0030	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0030 DAS_C_IG_8_0030
	DAS_I_10_0030 DAS_IG_10_0030		DAS_C_I_10_0030 DAS_C_IG_10_0030
	DAS_I_12_0030 DAS_IG_12_0030		DAS_C_I_12_0030 DAS_C_IG_12_0030
SCANALOG	DAS_SA_0030	SCANALOG	DAS_C_SA_0030

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation
R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0033

STANDARD DYNAMIC TIBASE®																
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	
1,3 mm				2 mm				3mm				4mm				
R	31.322.033.01-2	38°	18°	31.322.033.02-2	20°	14°	31.322.033.03-2	15°	25°	31.322.033.04-2	15°	25°	-	-	-	
NR	31.312.033.01-2			31.312.033.02-2			31.312.033.03-2			31.312.033.04-2			-			



DYNAMIC 3TIBASE®										
GINGIVAL HEIGHT		α _s	α _s	α _s	GINGIVAL HEIGHT		α _s	α _s		
1,3 mm		CH=5mm	CH= 7mm	CH= 9mm	3 mm		CH=5mm	CH= 7mm		
R	31.322.033.21-2	25°	20°	10°	31.322.033.23-2	20°	15°	10°		
NR	31.312.033.21-2				31.312.033.23-2					



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME		α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}
52.408.106.01-2	8	50.312.033.01-2 50.312.033.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2	34.612.033.01-2	32.212.033.02-2	25°	33.315.804.01-2	3	25°	23.412.033.01-2
52.410.106.01-2	10						33.415.804.01-2	4		
52.412.106.01-2	12						33.615.804.01-2	6		



DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	LAB SCANBODY	
41.316.078.01-2	41.316.124.01-2	43.618.201.01-2	18	40.316.007.01-2	43.601.107.01-2	22.612.033.01-2	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0033	LAB SCANBODY	DAS_C_E_0033
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0033 DAS_IG_8_0033	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0033 DAS_C_IG_8_0033
	DAS_I_10_0033 DAS_IG_10_0033		DAS_C_I_10_0033 DAS_C_IG_10_0033
	DAS_I_12_0033 DAS_IG_12_0033		DAS_C_I_12_0033 DAS_C_IG_12_0033
SCANALOG	DAS_SA_0033	SCANALOG	DAS_C_SA_0033

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
α_s = Standard maximum angulation
α_c = Captive maximum angulation
α_{di} = Direct to implant maximum angulation
α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0035

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
1,1 mm				2 mm				3 mm				4 mm			
R	31.323.035.01-2	39°	18°	31.323.035.02-2	20°	14°	31.323.035.03-2	15°	30°	31.323.035.04-2	15°	30°	-	-	-
NR	31.313.035.01-2			31.313.035.02-2			31.313.035.03-2			31.313.035.04-2			-		



DYNAMIC 3TIBASE®							
GINGIVAL HEIGHT		α _s	α _s	α _s	GINGIVAL HEIGHT		α _s
1,1 mm		CH=5mm	CH= 7mm	CH= 9mm	3 mm		α _s



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}	
52.410.107.01-2	10	50.313.035.01-2	43.621.410.01-2 43.624.410.01-2	34.613.035.01-2	32.213.035.02-2	25°	33.315.804.01-2	3	25°	23.413.035.01-2
							50.313.035.03-2 (IG=3mm)	33.415.804.01-2		
52.412.107.01-2	12	33.615.804.01-2	6							



DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	LAB SCANBODY	
41.316.078.01-2	41.316.124.01-2	43.618.201.01-2	18	40.316.007.01-2	43.601.107.01-2	22.613.035.01-2	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0035	LAB SCANBODY	DAS_C_E_0035
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0035 DAS_IG_10_0035	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0035 DAS_C_IG_10_0035
	DAS_I_12_0035 DAS_IG_12_0035		DAS_C_I_12_0035 DAS_C_IG_12_0035
SCANALOG	DAS_SA_0035	SCANALOG	DAS_C_SA_0035

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
α_s = Standard maximum angulation
α_c = Captive maximum angulation
α_{di} = Direct to implant maximum angulation
α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0037

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
0,6 mm				mm				mm				mm			
R	31.323.037.01-2	45°	25°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.313.037.01-2			-			-		-						



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}	
52.410.110.01-2	10	50.313.037.01-2	43.621.410.01-2	34.613.037.01-2	32.213.037.02-2	30°	33.315.708.01-2	3	30°	23.413.037.01-2
		50.313.037.04-2	43.624.410.01-2				33.415.708.01-2	4		
52.412.110.01-2	12	(IG=3mm)					33.615.708.01-2	6		



DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG		LAB SCANBODY	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6				
41.320.067.01-2	-	43.618.201.01-2	18	40.320.007.01-2	43.601.107.01-2	22.613.037.01-2	30.413.004.01-2		
		43.624.201.01-2	24						
		43.632.201.01-2	32						

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0037	LAB SCANBODY	DAS_C_E_0037
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0037 DAS_IG_10_0037	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0037 DAS_C_IG_10_0037
	DAS_I_12_003 DAS_IG_12_0037		DAS_C_I_12_0037 DAS_C_IG_12_0037
SCANALOG	DAS_SA_0037	SCANALOG	DAS_C_SA_0037

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0038

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,7 mm				mm				mm				mm			
R	31.322.038.01-2	45°	29°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.312.038.01-2			-				-				-			



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
0,7 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.322.038.21-2	30°	25°	10°
NR	31.312.038.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}
52.410.103.01-2	10	50.312.038.01-2	43.621.410.01-2	34.612.038.01-2	-	-	33.345.804.01-2	3	25°
			43.624.410.01-2				33.445.804.01-2	4	
52.412.103.01-2	12								



DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG		LAB SCANBODY	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.25				
41.316.081.01-2	-	43.618.201.01-2	18	40.316.004.02-2	43.601.104.01-2	22.613.037.01-2	30.413.004.01-2		
		43.624.201.01-2	24						
		43.632.201.01-2	32						

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0038	LAB SCANBODY	DAS_C_E_0038
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0038	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0038
	DAS_I_12_0038		DAS_C_I_12_0038

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0039

STANDARD DYNAMIC TIBASE®															
	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	0,7 mm			mm			2 mm			mm			mm		
R	31.323.039.01-2	45°	29°	-	-	-	31.323.039.03-2	25°	-	-	-	-	-	-	-
NR	31.313.039.01-2			-			31.313.039.03-2			-			-		



DYNAMIC 3TIBASE®				
	GINGIVAL HEIGHT	α_s	α_s	α_s
	0,7 mm	CH=5mm	CH= 7mm	CH= 9mm
R	31.323.039.21-2	30°	25°	10°
NR	31.313.039.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.114.01-2	10	50.313.039.01-2	43.621.410.01-2 43.624.410.01-2	34.613.039.01-2	-	-	33.345.856.01-2	3	25°
							33.445.856.01-2	4	
52.412.114.01-2	12						33.645.856.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG		LAB SCANBODY	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.25				
41.316.081.01-2	-	43.618.201.01-2	18	40.316.004.02-2	43.601.104.01-2	-			30.413.002.01-2
		43.624.201.01-2	24						
		43.632.201.01-2	32						

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0039	LAB SCANBODY	DAS_C_E_0039
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0039	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0039
	DAS_I_12_0039		DAS_C_I_12_0039

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0040

STANDARD DYNAMIC TIBASE®															
	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	0,6 mm			1,5 mm			3 mm			4 mm			5 mm		



DYNAMIC 3TIBASE®																	
		GINGIVAL HEIGHT				GINGIVAL HEIGHT				GINGIVAL HEIGHT				GINGIVAL HEIGHT			
		α_s	α_s	α_s		α_s	α_s	α_s		α_s	α_s	α_s		α_s			
		0,6 mm	CH= 5mm	CH= 7mm	CH= 9mm	1 mm	CH= 5mm	CH= 7mm	CH= 9mm	2 mm	CH= 5mm	CH= 7mm	CH= 9mm	3 mm	CH= 5mm	CH= 7mm	CH= 9mm
R	31.322.040.21-2	25°	20°	10°	31.322.040.29-2	30°	25°	20°		25°	20°	15°	31.322.040.23-2	25°	20°	15°	
NR	31.312.040.21-2				31.312.040.29-2				31.312.040.28-2								
DYNAMIC µSCANBODY (LAB/CLIN)						DIGITAL ANALOG			DYNAMIC PRE-MILLED				DYNAMIC MILLING TOOL			SCAN	



SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}	
52.408.101.01-2	8	50.312.040.01-2 50.312.040.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2	34.612.040.01-2	32.212.040.02-2	25°	33.370.716.01-2	3	25°	23.412.040.01-2
52.410.101.01-2	10						33.470.716.01-2	4		
52.412.101.01-2	12						33.670.716.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG		LAB SCANBODY	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27				
41.317.071.01-2	41.317.106.01-2	43.618.201.01-2	18	40.317.004.01-2	43.601.104.01-2	-		22.612.040.01-2	30.412.001.01-2
		43.624.201.01-2	24						
		43.632.201.01-2	32						

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0040	LAB SCANBODY	DAS_C_E_0040
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0040	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0040
	DAS_I_10_0040		DAS_C_I_10_0040
	DAS_I_12_0040		DAS_C_I_12_0040
	DAS_I_8_0040		DAS_C_I_8_0040
	DAS_I_10_0040		DAS_C_I_10_0040
	DAS_I_12_0040		DAS_C_I_12_0040
SCANALOG	DAS_SA_0040	SCANALOG	DAS_C_SA_0040

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0040b

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_c		GINGIVAL HEIGHT		α_s		α_c		GINGIVAL HEIGHT		α_s	
0,6 mm				1,5 mm				3 mm		mm		5 mm	
R	31.322.040.01-2	45°	30°	31.322.040.02-2	25°	25°		31.322.040.03-2	20°	30°		31.322.040.05-2	10°
NR	31.312.040.01-2			31.312.040.02-2				31.312.040.03-2				31.312.040.05-2	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
0,6 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.322.040.21-2	25°	20°	10°
NR	31.312.040.21-2			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
-	-	-	-	-
-	-			
-	-			

COBALT-CHROME		α_{dp}
32.212.040.02-2		25°

DYNAMIC MILLING TOOL	SHANK	α_{di}
33.370.716.01-2	3	25°
33.470.716.01-2	4	
33.670.716.01-2	6	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.071.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
-	-

ANALOG	LAB SCANBODY
-	30.412.001.01-2



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0040	LAB SCANBODY	DAS_C_E_0040
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0041

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s		GINGIVAL HEIGHT		α_s		α_c		GINGIVAL HEIGHT		α_s	
0,4 mm				1,5 mm				mm		mm		mm	
R	31.323.041.01-2	45°	30°	31.323.041.02-2	30°	25°		-	-	-	-	-	-
NR	31.313.041.01-2			31.313.041.02-2				-		-		-	
NR (Friction-Fit)	31.313.043.01-2			-				-		-		-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
0,4 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.323.041.21-2	30°	20°	10°
NR	31.313.041.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.410.102.01-2	10	50.313.041.01-2	43.621.410.01-2 43.624.410.01-2	34.613.041.01-2
52.412.102.01-2	12	50.313.041.03-2 (IG=3mm)		

COBALT-CHROME		α_{dp}
32.213.041.02-2		30°

DYNAMIC MILLING TOOL			SCANALOG
DYNAMIC MILLING TOOL	SHANK	α_{di}	23.413.041.01-2
33.370.716.01-2	3	30°	
33.470.716.01-2	4		
33.670.716.01-2	6		

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.317.071.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.317.004.01-2	43.601.104.01-2

ANALOG	LAB SCANBODY
22.613.041.01-2	30.413.002.01-2



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0041	LAB SCANBODY	DAS_C_E_0041
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0041 DAS_IG_10_0041	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0041 DAS_C_IG_10_0041
	DAS_I_12_0041 DAS_IG_12_0041		DAS_C_I_12_0041 DAS_C_IG_12_0041
SCANALOG	DAS_SA_0041	SCANALOG	DAS_C_SA_0041

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0041b

STANDARD DYNAMIC TIBASE®													
	GINGIVAL HEIGHT 0,4 mm	α_s	α_c	GINGIVAL HEIGHT 1,5 mm	α_s	α_c	GINGIVAL HEIGHT mm	α_s	α_c	GINGIVAL HEIGHT mm	α_s	α_c	GINGIVAL HEIGHT mm
R	31.323.041.01-2	45°	30°	31.323.041.02-2	30°	25°	-	-	-	-	-	-	-
NR	31.313.041.01-2			31.313.041.02-2			-			-			-



DYNAMIC 3TIBASE®				
	GINGIVAL HEIGHT 0,4 mm	α_s CH=5mm	α_s CH= 7mm	α_s CH= 9mm
R	31.323.041.21-2	30°	20°	10°
NR	31.313.041.21-2			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL	
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT- CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK
-	-	-	-	-	-	32.013.041.02-2	30°	33.370.716.01-2	3
								33.470.716.01-2	4
-	-							33.670.716.01-2	6

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27		LAB SCANBODY
41.318.071.01-2	-	43.618.201.01-2	18	-	-	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0041	LAB SCANBODY	DAS_C_E_0041
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

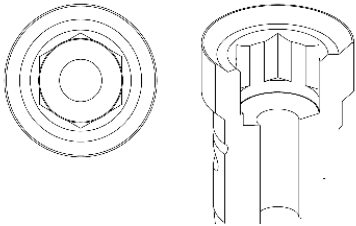

COMPATIBLE with 0044

STANDARD DYNAMIC TIBASE®													
	GINGIVAL HEIGHT 1 mm	α_s	α_c	GINGIVAL HEIGHT mm	α_s	α_c	GINGIVAL HEIGHT mm	α_s	α_c	GINGIVAL HEIGHT mm	α_s	α_c	GINGIVAL HEIGHT mm
R	31.322.044.01-2	42°	23°	-	-	-	-	-	-	-	-	-	-
NR	31.312.044.01-2			-			-			-			-



DYNAMIC 3TIBASE®			
	GINGIVAL HEIGHT 1 mm	α_s CH=5mm	α_s CH= 7mm
R	31.322.044.21-2	25°	20°
NR	-		



DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT- CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.105.01-2	10	50.312.044.01-2	43.621.410.01-2 43.624.410.01-2	34.612.044.01-2	-	-	-	33.390.716.01-2	3	25°
								33.490.716.01-2	4	
52.412.105.01-2	12							33.690.716.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20		LAB SCANBODY
41.318.065.01-2	-	43.618.201.01-2	18	40.318.003.01-2	43.601.103.02-2	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0044	LAB SCANBODY	DAS_C_E_0044
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0044	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0044
	DAS_I_12_0044		DAS_C_I_12_0044

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

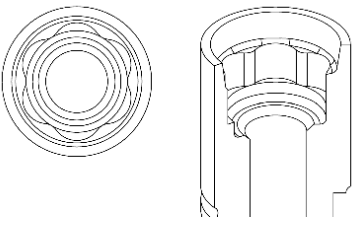

COMPATIBLE with 0045

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1 mm				mm				mm				mm	
R	31.323.045.01-2	43°	22°	-	-	-	-	-	-	-	-	-	-
NR	31.313.045.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
1 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.323.045.21-2	30°	20°	10°
NR	31.313.045.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.118.01-2	10	50.313.045.01-2	43.621.410.01-2 43.624.410.01-2	34.613.045.01-2	-	-	33.390.716.01-2	3	30°
							33.490.716.01-2	4	
52.412.118.01-2	12						33.690.716.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20		LAB SCANBODY
41.318.065.01-2	-	43.618.201.01-2	18	40.318.003.01-2	43.601.103.02-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0045	LAB SCANBODY	DAS_C_E_0045
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0045	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0045
	DAS_I_12_0045		DAS_C_I_12_0045

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0046

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1 mm				mm				mm				mm	
R	31.324.046.01-2	42°	21°	-	-	-	-	-	-	-	-	-	-
NR	31.314.046.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
1 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.324.046.21-2	30°	20°	10°
NR	-			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.125.01-2	10	50.314.046.01-2	43.621.410.01-2 43.624.410.01-2	34.614.046.01-2	-	-	33.390.716.01-2	3	30°
							33.490.716.01-2	4	
52.412.125.01-2	12						33.690.716.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20		LAB SCANBODY
41.318.065.01-2	-	43.618.201.01-2	18	40.318.003.01-2	43.601.103.02-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0046	LAB SCANBODY	DAS_C_E_0046
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0046	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0046
	DAS_I_12_0046		DAS_C_I_12_0046

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0047

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,6 mm				mm				mm				mm			
R	31.322.047.01-2			-	-			-	-			-	-		
NR	31.312.047.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
0,6 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.322.047.21-2	30°	25°	20°
NR	31.312.047.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.123.01-2	10	50.312.047.01-2	43.621.410.01-2 43.624.410.01-2	34.612.047.01-2	-	-	33.390.716.01-2	3	25°
							33.490.716.01-2	4	
52.412.123.01-2	12						33.690.716.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG		LAB SCANBODY	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6				
41.320.074.01-2	-	43.618.201.01-2	18	40.320.007.02-2	43.601.107.01-2	-		30.412.001.01-2	
		43.624.201.01-2	24						
		43.632.201.01-2	32						

COMPATIBLE with 0048

STANDARD DYNAMIC TIBASE®																
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	
0,6 mm		45°	30°	mm	-	-	mm	-	-	mm	-	-	mm	-	-	
R	31.323.048.01-2			-			-			-			-			-
NR	31.313.048.01-2			-			-			-			-			-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	30°	25°	20°
NR	31.313.048.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.123.01-2	10	50.312.047.01-2	43.621.410.01-2 43.624.410.01-2	34.612.047.01-2	-	-	33.390.716.01-2	3	30°
							33.490.716.01-2	4	
52.412.123.01-2	12						33.690.716.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG		LAB SCANBODY	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6				
41.320.074.01-2	-	43.618.201.01-2	18	40.320.007.02-2	43.601.107.01-2	-		30.413.002.01-2	
		43.624.201.01-2	24						
		43.632.201.01-2	32						



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0048	LAB SCANBODY	DAS_C_E_0048
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0048	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0048
	DAS_I_12_0048		DAS_C_I_12_0048

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0049

STANDARD DYNAMIC TIBASE®																	
GINGIVAL HEIGHT		α_s		α_c		GINGIVAL HEIGHT		α_s		α_c		GINGIVAL HEIGHT		α_s		α_c	
0,6 mm				mm				mm				mm					
R	31.321.049.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.311.049.01-2			-			-			-			-				



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.116.01-2	10	50.311.049.01-2	43.621.410.01-2 43.624.410.01-2	34.611.049.01-2	-	-	33.325.472.01-2*	3	25°
							33.425.472.01-2*	4	
52.412.116.01-2	12						33.625.472.01-2*	6	

* Only for titanium and soft materials

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.25	ANALOG	LAB SCANBODY
41.314.064.01-2	-	43.618.201.01-2	18	40.314.004.01-2	43.601.104.01-2	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0049	LAB SCANBODY	DAS_C_E_0049
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0049	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0049
	DAS_I_12_0049		DAS_C_I_12_0049

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0050

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
0,5 mm				mm			2 mm			mm			mm		
R	31.323.051.01-2	45°	27°	-	-	-	31.323.051.03-2	25°	-	-	-	-	-	-	-
NR	31.313.051.01-2			-			31.313.051.03-2			-			-		



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.117.01-2	10	50.312.050.01-2	43.621.410.01-2 43.624.410.01-2	34.612.050.01-2	-	-	33.335.676.01-2	3	25°
							33.435.676.01-2	4	
52.412.117.01-2	12	50.312.050.04-2 (IG=3mm)					33.635.676.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.25	ANALOG	LAB SCANBODY
41.318.064.01-2	-	43.618.201.01-2	18	40.318.004.03-2	43.601.104.01-2	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0050	LAB SCANBODY	DAS_C_E_0050
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0050 DAS_IG_10_0050	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0050 DAS_C_IG_10_0050
	DAS_I_12_0050 DAS_IG_12_0050		DAS_C_I_12_0050 DAS_C_IG_12_0050

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0051

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,5 mm				mm				2 mm				mm	
R	31.323.051.01-2	45°	25°	-	-	-		31.323.051.03-2	25°	-	-	-	-
NR	31.313.051.01-2			-				31.313.051.03-2				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.118.01-2	10	50.313.051.01-2	43.621.410.01-2 43.624.410.01-2	34.613.051.01-2	-	-	33.335.676.01-2	3	25°
							33.435.676.01-2	4	
52.412.118.01-2	12						33.635.676.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.25	ANALOG	LAB SCANBODY
41.318.064.01-2	-	43.618.201.01-2	18	40.318.004.03-2	43.601.104.01-2	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0051	LAB SCANBODY	DAS_C_E_0051
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0051 DAS_IG_10_0051	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0051 DAS_C_IG_10_0051
	DAS_I_12_0051 DAS_IG_12_0051		DAS_C_I_12_0051 DAS_C_IG_12_0051

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0052

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,3 mm				mm				mm				mm	
R	31.324.052.01-2	45°	27°	-	-	-		-	-	-		-	-
NR	31.314.052.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.102.01-2	10	50.314.052.01-2	43.621.410.01-2 43.624.410.01-2	34.614.052.01-2	-	-	33.335.676.01-2	3	30°
							33.435.676.01-2	4	
52.412.102.01-2	12						33.635.676.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.25	ANALOG	LAB SCANBODY
41.318.064.01-2	-	43.618.201.01-2	18	40.318.004.03-2	43.601.104.01-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0052	LAB SCANBODY	DAS_C_E_0052
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0052 DAS_I_12_0052	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0052 DAS_C_I_12_0052

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0054

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,6 mm				mm				mm				mm	
R	31.323.054.01-2	45°	25°	-	-	-	-	-	-	-	-	-	-
NR	31.313.054.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME		DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.119.01-2	10	50.314.054.01-2	43.621.410.01-2 43.624.410.01-2	34.614.054.01-2	-	-	33.345.856.01-2	3	30°
							33.445.856.01-2	4	
52.412.119.01-2	12						33.645.856.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.318.067.01-2	-	43.618.201.01-2	18	40.318.012.01-2	-	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0054	LAB SCANBODY	DAS_C_I_0054
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0054	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0054
	DAS_I_12_0054		DAS_C_I_12_0054

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0057

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,5 mm				mm				mm				mm	
R	31.324.057.01-2	45°	27°	-	-	-	-	-	-	-	-	-	-
NR	31.314.057.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME		DYNAMIC MILLING TOOL	SHANK	α_{di}
52.408.101.01-2	8	50.314.057.01-2	43.621.410.01-2 43.624.410.01-2	34.614.057.01-2	-	-	33.390.805.01-2	3	30°
52.410.101.01-2	10						33.490.805.01-2	4	
52.412.101.01-2	12						33.690.805.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.316.084.01-2	-	43.618.201.01-2	18	40.316.003.01-2	Hex. 1.20 43.601.103.02-2	22.614.057.01-2	30.414.003.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0057	LAB SCANBODY	DAS_C_E_0057
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0057	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0057
	DAS_I_10_0057		DAS_C_I_10_0057
	DAS_I_12_0057		DAS_C_I_12_0057

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c
0,5 mm				mm			mm			mm			mm		
R	31.324.058.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.314.058.01-2			-			-			-			-		



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.410.118.01-2	10	50.314.058.01-2	43.621.410.01-2 43.624.410.01-2	34.614.058.01-2
52.412.118.01-2	12			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.390.716.01-2	3	30°
33.490.716.01-2	4	
33.690.716.01-2	6	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.047.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
40.320.003.01-2	43.601.103.02-2

ANALOG	LAB SCANBODY
22.614.058.01-2	30.414.003.01-2

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c
0,7 mm				mm			mm			mm			mm		
R	31.324.059.01-2	45°	27°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.314.059.01-2			-			-			-			-		



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.410.115.01-2	10	50.313.010.01-2	43.621.410.01-2 43.624.410.01-2	34.614.059.01-2
		50.313.010.04-2		
52.412.115.01-2	12	(IG=3mm)		

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.390.716.01-2	3	25
33.490.716.01-2	4	
33.690.716.01-2	6	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.065.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32



STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
40.318.003.01-2	43.601.103.02-2

ANALOG	LAB SCANBODY
22.614.059.01-2	30.414.003.01-2

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0059	LAB SCANBODY	DAS_C_E_0059
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0059 DAS_IG_10_0059	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0059 DAS_C_IG_10_0059
	DAS_I_12_0059 DAS_IG_12_0059		DAS_C_I_12_0059 DAS_C_IG_12_0059

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation
R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0060

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c
0,5 mm				mm			mm			mm			mm		
R	31.324.060.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.314.060.01-2			-			-			-			-		



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.410.122.01-2	10	50.314.060.01-2	43.621.410.01-2 43.624.410.01-2	34.614.060.01-2
52.412.122.01-2	12			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.390.716.01-2	3	30°
33.490.716.01-2	4	
33.690.716.01-2	6	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.060.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
40.320.003.02-2	43.601.103.02-2

ANALOG	LAB SCANBODY
22.614.060.01-2	30.415.007.01-2

COMPATIBLE with 0061

STANDARD DYNAMIC TIBASE®																	
GINGIVAL HEIGHT		α_s		α_c		GINGIVAL HEIGHT		α_s		α_c		GINGIVAL HEIGHT		α_s		α_c	
0,6 mm				mm				mm				mm				mm	
R	31.324.061.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.314.061.01-2			-			-			-			-				



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.410.125.01-2	10	50.314.061.01-2	43.621.410.01-2 43.624.410.01-2	34.614.061.01-2
52.412.125.01-2	12			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.390.958.01-2	3	30°
33.490.958.01-2	4	
33.690.958.01-2	6	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.325.067.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER UNIGRIP
40.325.008.01-2	43.601.108.01-2

ANALOG	LAB SCANBODY
22.614.061.01-2	30.415.007.01-2



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0061	LAB SCANBODY	DAS_C_E_0061
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0061	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0061
	DAS_I_12_0061		DAS_C_I_12_0061

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0066

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c
0,6 mm				mm			mm			mm			mm		
R	31.323.066.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-
NR	-			-	-	-	-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-	-	-	-

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-	-	-	-	-	-	-
								-	-	
-	-							-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.314.039.01-2	-	43.618.201.01-2	18	-	-	22.613.066.01-2	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0066	LAB SCANBODY	DAS_C_E_0066
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0074

STANDARD DYNAMIC TIBASE®																	
GINGIVAL HEIGHT		α_s		α_c		GINGIVAL HEIGHT		α_s		α_c		GINGIVAL HEIGHT		α_s		α_c	
0,6 mm				mm						mm						mm	
R	31.323.074.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.313.074.01-2			-			-			-			-			-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-	-	-	-

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}	
52.410.110.01-2	10	50.313.074.01-2	43.621.410.01-2 43.624.410.01-2	34.613.074.01-2	-	-	-	33.330.708.01-2	3	30°	23.413.074.01-2
								33.430.708.01-2	4		
52.412.110.01-2	12							33.630.708.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Sq. 1.30	ANALOG	LAB SCANBODY
41.320.050.01-2	-	43.618.201.01-2	18	40.320.007.04-2	43.601.102.01-2	22.613.074.01-2	30.415.007.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0074	LAB SCANBODY	DAS_C_E_0074
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0074	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0074
	DAS_I_12_0074		DAS_C_I_12_0074
SCANALOG	DAS_SA_0074	SCANALOG	DAS_C_SA_0074

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0075

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1 mm				2 mm				3 mm				4 mm	
R	31.322.075.01-2	42°	24°	31.322.075.02-2	25°	15°	31.322.075.03-2	20°	-	31.322.075.04-2	15°	-	-
NR	-			-			-			-		-	-

DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
1 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.322.075.21-2	30°	20°	15°
NR	-			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.105.01-2	10	50.312.075.03-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2	34.612.075.01-2	-	-	33.330.734.01-2	3	25°
							33.430.734.01-2	4	
52.412.105.01-2	12						33.630.734.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.00		LAB SCANBODY
41.318.077.01-2	-	43.618.201.01-2	18	40.318.013.01-2	-	22.612.075.01-2	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

COMPATIBLE with 0080

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,4 mm				mm				mm				mm	
R	31.324.080.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-
NR	31.314.080.01-2			-	-	-	-	-	-	-	-	-	-

DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.124.01-2	10	50.314.080.01-2	43.621.410.01-2 43.624.410.01-2	34.614.080.01-2	-	-	33.370.716.01-2	3	30°
							33.470.716.01-2	4	
52.412.124.01-2	12						33.670.716.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27		LAB SCANBODY
41.317.071.01-2	-	43.618.201.01-2	18	40.317.004.01-2	43.601.104.01-2	22.614.080.01-2	30.414.003.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0080	LAB SCANBODY	DAS_C_E_0080
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0080	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0080
	DAS_I_12_0080		DAS_C_I_12_0080

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0081

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,4 mm				mm				mm				mm	
R	31.325.081.01-2	41°	18°	-	-	-	-	-	-	-	-	-	-
NR	31.315.081.01-2			-	-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.126.01-2	10	50.315.081.01-2	43.621.410.01-2 43.624.410.01-2	34.615.081.01-2	-	-	33.335.676.01-2	3	30°
							33.435.676.01-2	4	
52.412.126.01-2	12						33.635.676.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.25	ANALOG	LAB SCANBODY
41.318.064.01-2	-	43.618.201.01-2	18	40.318.004.03-2	43.601.104.01-2	-	30.414.003.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0081	LAB SCANBODY	DAS_C_E_0081
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0081	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0081
	DAS_I_12_0081		DAS_C_I_12_0081

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0082

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1,2 mm				mm				mm				mm	
R	31.322.082.01-2	45°	25°	-	-	-	-	-	-	-	-	-	-
NR	31.312.082.01-2			-	-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.105.01-2	10	50.312.082.01-2	43.621.410.01-2 43.624.410.01-2	34.612.082.01-2	-	-	33.345.804.01-2	3	25°
							33.445.804.01-2	4	
52.412.105.01-2	12						33.645.804.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER -	ANALOG	LAB SCANBODY
41.316.074.01-2	-	43.618.201.01-2	18	40.316.012.01-2	-	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0082	LAB SCANBODY	DAS_C_E_0082
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0082	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0082
	DAS_I_12_0082		DAS_C_I_12_0082

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0083

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1,2 mm				mm				mm				mm	
R	31.323.083.01-2	45°	25°	-	-	-	-	-	-	-	-	-	-
NR	31.313.083.01-2			-				-				-	

DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.103.01-2	10	50.313.083.01-2	43.621.410.01-2 43.624.410.01-2	34.613.083.01-2	-	-	33.345.856.01-2	3	30°
							33.445.856.01-2	4	
52.412.103.01-2	12						33.645.856.01-2	6	


DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.318.076.01-2	-	43.618.201.01-2	18	40.318.012.02-2	-	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES			
STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0083	LAB SCANBODY	DAS_C_E_0083
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0083	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0083
	DAS_I_12_0083		DAS_C_I_12_0083

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

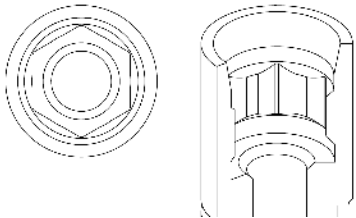

COMPATIBLE with 0084

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1 mm				mm				mm				mm	
R	31.321.084.01-2	40°	-	-	-	-	-	-	-	-	-	-	-
NR	31.311.084.01-2			-				-				-	

DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-	-	-	-	-	-
							-	-	
-	-						-	-	


DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.314.076.01-2	-	43.618.201.01-2	18	40.314.003.03-2	Star 1.50 43.601.103.02-2	-	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES			
STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0084	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

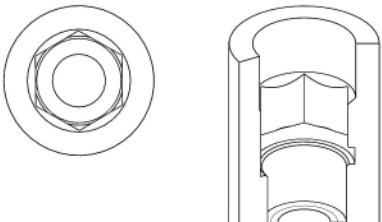

COMPATIBLE with 0085

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,3 mm				mm				mm				mm	
R	31.324.085.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-
NR	31.314.085.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.117.01-2	10	50.314.085.01-2	43.621.410.01-2 43.624.410.01-2	34.614.085.01-2	-	-	33.345.856.01-2	3	25°
							33.445.856.01-2	4	
52.412.117.01-2	12						33.645.856.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.25	ANALOG	LAB SCANBODY
41.316.081.01-2	-	43.618.201.01-2	18	40.316.004.02-2	43.601.104.01-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0085	LAB SCANBODY	DAS_C_E_0085
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0085	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0085
	DAS_I_12_0085		DAS_C_I_12_0085

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0086

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1 mm				mm				mm				mm	
R	31.325.086.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-
NR	31.315.086.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-	-	-	-	-	-
							-	-	
-	-						-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.25	ANALOG	LAB SCANBODY
41.316.081.01-2	-	43.618.201.01-2	18	40.316.004.02-2	43.601.104.01-2	-	30.415.007.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0086	LAB SCANBODY	DAS_C_E_0086
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
0,3 mm		25°	-	mm		-	-	mm		-	-	mm		-	-
R	31.321.087.01-2			-	-			-	-			-	-		
NR	31.311.087.01-2			-	-			-	-			-	-		

DYNAMIC 3TIBASE®									
GINGIVAL HEIGHT		α _s	α _s	α _s	GINGIVAL HEIGHT		α _s	α _s	α _s
0,3 mm		CH=5mm	CH= 7mm	CH= 9mm	2 mm		CH=5mm	CH= 7mm	CH= 9mm
R	-	20°	20°	15°	-	25°	20°	15°	
NR	31.311.087.21-2				31.311.087.23-2				

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-	-	-	-	-	-	-
								-	-	
-	-							-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	ANALOG	LAB SCANBODY
41.316.094.01-2	-	43.618.201.01-2	18	40.316.005.04-2	43.601.105.01-2	-	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,3 mm		25°	-	mm		-	-	mm		-	-	mm		-	-
R	31.324.088.01-2			-	-			-	-			-	-		
NR	31.314.088.01-2			-	-			-	-			-	-		

DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-	-	-	-	-	-	-
								-	-	
-	-							-	-	


DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	ANALOG	LAB SCANBODY
41.320.094.01-2	-	43.618.201.01-2	18	40.320.005.04-2	43.601.105.01-2	-	30.414.003.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES			
STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0088	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

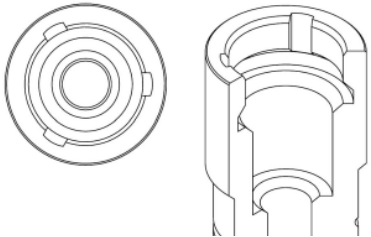

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1 mm				mm				mm				mm	
R	31.321.090.01-2	45°	24°	-	-	-	-	-	-	-	-	-	-
NR	31.311.090.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.410.128.01-2	10	50.311.090.01-2	43.621.415.01-2	34.611.090.01-2
-	-			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.325.472.01-2*	3	25°
33.425.472.01-2*	4	
33.625.472.01-2*	6	

*Only for **R**
*Only for titanium and soft materials

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.074.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.314.005.01-2	43.601.105.01-2

ANALOG	LAB SCANBODY
-	30.410.006.01-2

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1,2 mm				2 mm				3 mm				4 mm	
R	31.324.091.01-2	38°	18°	31.324.091.02-2	25°	-	-	31.324.091.03-2	20°	-	-	31.324.091.04-2	15°
NR	31.314.091.01-2			31.314.091.02-2				31.314.091.03-2				31.314.091.04-2	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.410.102.01-2	10	50.314.091.01-2	43.621.410.01-2 43.624.410.01-2	34.614.091.01-2
52.412.102.01-2	12			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.390.958.01-2	3	30°
33.490.958.01-2	4	
33.690.958.01-2	6	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.320.082.01-2	41.320.129.01-2	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.320.005.01-2	43.601.105.01-2

ANALOG	LAB SCANBODY
-	30.413.002.01-2



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0091	LAB SCANBODY	DAS_C_E_0091
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0091	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0091
	DAS_I_12_0091		DAS_C_I_12_0091

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1 mm				2 mm				mm				mm	
R	31.325.092.01-2	45°	25°	-	-	-	-	-	-	-	-	-	-
NR	31.315.092.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.129.01-2	10	50.315.092.01-2	43.621.410.01-2 43.624.410.01-2	34.615.092.01-2	-	-	33.390.958.01-2	3	30°
							33.490.958.01-2	4	
52.412.129.01-2	12						33.690.958.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	ANALOG	LAB SCANBODY
41.320.082.01-2	-	43.618.201.01-2	18	40.320.005.01-2	43.601.105.01-2	-	30.415.007.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0092	LAB SCANBODY	DAS_C_E_0092
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0092	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0092
	DAS_I_12_0092		DAS_C_I_12_0092

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,6 mm				mm				mm				mm	
R	31.324.096.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-
NR	31.314.096.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}	
52.410.110.01-2	10	50.314.096.01-2	43.621.410.01-2 43.624.410.01-2	34.614.096.01-2	-	-	33.315.708.01-2	3	30°	23.414.096.01-2
							33.415.708.01-2	4		
52.412.110.01-2	12						33.615.708.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	ANALOG	LAB SCANBODY
41.320.067.01-2	-	43.618.201.01-2	18	40.320.007.01-2	43.601.107.01-2	22.614.096.01-2	30.414.008.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0096	LAB SCANBODY	DAS_C_E_0096
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0096	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0096
	DAS_I_12_0096		DAS_C_I_12_0096
SCANALOG	DAS_SA_0096	SCANALOG	DAS_C_SA_0096

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0101

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,5 mm				mm				mm				mm	
R	31.323.101.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-
NR	-			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}	
52.409.133.01-2	9	50.313.101.01-2	43.621.410.01-2 43.624.410.01-2	34.613.101.01-2	-	-	33.335.676.01-2	3	30°	23.413.101.01-2
							33.435.676.01-2	4		
-	-						33.635.676.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	LAB SCANBODY	
41.314.043.01-2	-	43.618.201.01-2	18	40.314.007.01-2	43.601.107.01-2	-	30.413.005.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0101	LAB SCANBODY	DAS_C_E_0101
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_9_0101	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_9_101
	-		-
SCANALOG	DAS_SA_0101	SCANALOG	DAS_C_SA_0101

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0102

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1,8 mm				mm				mm				mm	
R	31.322.102.01-2	38°	18°	-	-	-	-	-	-	-	-	-	-
NR	31.312.102.01-2			-				-				-	



DYNAMIC 3TIBASE®														
GINGIVAL HEIGHT		α _s	α _s	α _s	GINGIVAL HEIGHT		α _s	α _s	α _s	GINGIVAL HEIGHT		α _s	α _s	α _s
1 mm		CH=5mm	CH= 7mm	CH= 9mm	1,8 mm		CH=5mm	CH= 7mm	CH= 9mm	3 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.322.102.29-2	30°	25°	20°	31.322.102.21-2	25°	15°	10°	31.322.102.23-2	20°	20°	15°		
NR	31.312.102.29-2				31.312.102.21-2								31.312.102.23-2	



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME		DYNAMIC MILLING TOOL		SHANK	α _{di}
52.410.128.01-2	10	50.312.102.03-2 (IG=3mm)	43.621.415.01-2	34.612.102.01-2	-	α _{dp} -	-	-	-	23.412.102.01-2
							-	-		
-	-						-	-		

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	LAB SCANBODY	
41.317.065.01-2	-	43.618.201.01-2	18	40.317.005.02-2	43.601.105.01-2	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0102	LAB SCANBODY	DAS_C_E_0102
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_IG_10_0102	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_IG_10_0102
	DAS_IG_12_0102		DAS_C_IG_12_0102
SCANALOG	DAS_SA_0102	SCANALOG	DAS_C_SA_0102

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0109

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
1,2 mm				mm				mm				mm			
R	31.322.109.01-2	45°	29°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.312.109.01-2			-			-		-						



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.410.128.01-2	10	50.312.109.01-2	43.621.415.01-2	34.612.109.01-2
52.412.128.01-2	12			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.360.754.01-2*	3	25°
33.460.754.01-2*	4	
33.660.754.01-2*	6	

*Only for **R**

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.070.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.27
40.314.005.02-2	43.601.105.01-2

ANALOG	LAB SCANBODY
-	30.412.001.01-2

COMPATIBLE with 0110

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,4 mm				mm				mm				mm			
R	31.320.110.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.310.110.01-2			-			-		-						



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.410.117.01-2	10	50.310.110.04-2 IG=3mm	43.621.410.01-2 43.624.410.01-2	34.610.110.01-2
52.412.117.01-2	12			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.360.756.01-2	3	20°
33.460.756.01-2	4	
33.660.756.01-2	6	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.083.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER TORX T6
-	-



ANALOG	LAB SCANBODY
-	30.410.006.01-2

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0110	LAB SCANBODY	DAS_C_E_0110
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_IG_10_0110	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_IG_10_0110
	DAS_IG_12_0110		DAS_C_IG_12_0110

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0111

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,4 mm				mm				mm				mm	
R	31.323.111.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-
NR	31.313.111.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME		DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.117.01-2	10	50.310.110.04-2 IG=3mm	43.621.410.01-2 43.624.410.01-2	34.610.110.01-2	-	-	33.360.756.01-2	3	20°
							33.460.756.01-2	4	
52.412.117.01-2	12						33.660.756.01-2	6	



DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	ANALOG	LAB SCANBODY
41.318.083.01-2	-	43.618.201.01-2	18	-	-	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0111	LAB SCANBODY	DAS_C_E_0111
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_IG_10_0111	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_IG_10_0111
	DAS_IG_12_0111		DAS_C_IG_12_0111

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0119

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1 mm				2 mm				mm				mm	
R	31.321.119.01-2	35°	-	31.321.119.02-2	30°	-	-	-	-	-	-	-	-
NR	31.311.119.01-2			31.311.119.02-2				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME		DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.132.01-2	10	50.311.119.03-2 IG=3mm	43.621.410.01-2 43.624.410.01-2	34.611.119.01-2	-	-	33.360.756.01-2	3	25
							33.460.756.01-2	4	
52.412.132.01-2	12						33.660.756.01-2	6	



DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1,27	ANALOG	LAB SCANBODY
41.316.080.01-2	-	43.618.201.01-2	18	40.316.005.07-2	43.601.105.01-2	-	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0119	LAB SCANBODY	DAS_C_E_0119
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_IG_10_0119	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_IG_10_0119
	DAS_IG_12_0119		DAS_C_IG_12_0119

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0120

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1 mm				mm				mm				mm	
R	31.323.121.01-2	45°	25°	-	-	-	-	-	-	-	-	-	-
NR	31.313.121.01-2			-				-				-	



DYNAMIC 3TIBASE®								
GINGIVAL HEIGHT		α_s	α_s	α_s	GINGIVAL HEIGHT		α_s	α_s
2mm		CH=5mm	CH= 7mm	CH= 9mm	3mm		CH=5mm	CH= 7mm
R	-	25°	20°	15°	-	31.313.121.23-2	25°	20°
NR	31.313.121.22-2				-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME		DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.108.01-2	10	50.312.120.03-2 IG=3mm	43.621.410.01-2 43.624.410.01-2	34.612.120.01-2	-	-	33.360.754.01-2	3	20°
							33.460.754.01-2	4	
52.412.108.01-2	12						33.660.754.01-2	6	



DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	LAB SCANBODY	
41.316.080.01-2	-	43.618.201.01-2	18	40.316.005.07-2	43.601.105.01-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0120	LAB SCANBODY	DAS_C_E_0120
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_IG_10_0120	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_IG_10_0120
	DAS_IG_12_0120		DAS_C_IG_12_0120

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0121

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1 mm				mm				mm				mm	
R	31.323.121.01-2	45°	25°	-	-	-	-	-	-	-	-	-	-
NR	31.313.121.01-2			-				-				-	



DYNAMIC 3TIBASE®							
GINGIVAL HEIGHT		α_s	α_s	α_s	GINGIVAL HEIGHT		α_s
2mm		CH=5mm	CH= 7mm	CH= 9mm	3mm		CH=5mm
R	-	25°	20°	15°	-	31.313.121.23-2	25°
NR	31.313.121.22-2				-		

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME		DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.109.01-2	10	50.313.121.01-2 50.313.121.03-2 IG=3mm	43.621.410.01-2 43.624.410.01-2	34.613.121.01-2	-	-	33.360.754.01-2	3	20°
							33.460.754.01-2	4	
52.412.109.01-2	12						33.660.754.01-2	6	



DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	LAB SCANBODY	
41.316.080.01-2	-	43.618.201.01-2	18	40.316.005.07-2	43.601.105.01-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0121	LAB SCANBODY	DAS_C_E_0121
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0121 DAS_IG_10_0121	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0121 DAS_C_IG_10_0121
	DAS_I_12_0121 DAS_IG_12_0121		DAS_C_I_12_0121 DAS_C_IG_12_0121

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0124

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
1,4 mm				mm			mm			mm			mm		
R	31.324.124.01-2	42°	19°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.314.124.01-2			-			-			-			-		



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.125.01-2	10	50.314.124.01-2	43.621.410.01-2 43.624.410.01-2	34.614.124.01-2	-	-	33.335.758.01-2	3	30°
							33.435.758.01-2	4	
52.412.125.01-2	12						33.635.758.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER UNIGRIP	ANALOG	LAB SCANBODY
41.320.075.01-2	-	43.618.201.01-2	18	40.320.008.02-2	43.601.108.01-2	-	30.414.003.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0124	LAB SCANBODY	DAS_C_E_0124
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0124	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0124
	DAS_I_12_0124		DAS_C_I_12_0124

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0125

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
1,1 mm				mm			mm			mm			mm		
R	31.323.125.01-2	42°	20°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.313.125.01-2			-			-			-			-		



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
1,1 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.323.125.21-2	30°	25°	15°
NR	31.313.125.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.117.01-2	10	50.313.125.01-2	43.621.410.01-2 43.624.410.01-2	34.613.125.01-2	-	-	33.315.804.01-2	3	25°
							33.415.804.01-2	4	
52.412.117.01-2	12	50.313.125.03-2 IG=3mm					33.615.804.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	ANALOG	LAB SCANBODY
41.316.078.01-2	-	43.618.201.01-2	18	40.316.007.01-2	43.601.107.01-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0125	LAB SCANBODY	DAS_C_E_0125
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0125 DAS_IG_10_0125	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0125 DAS_C_IG_10_0125
	DAS_I_12_0125 DAS_IG_12_0125		DAS_C_I_12_0125 DAS_C_IG_10_0125

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0128

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
2,5 mm				mm				mm				mm			
R	31.322.128.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-
NR	-			-			-		-						



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-		-	-	-	-	-
-	-							-	-	
-	-							-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	ANALOG	LAB SCANBODY
41.320.044.01-2	-	43.618.201.01-2	18	40.320.003.05-2	43.601.103.01-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0128	LAB SCANBODY	DAS_C_E_0128
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0129

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,3 mm				mm				mm				mm			
R	31.325.129.01-2	43°	30°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.315.129.01-2			-			-	-							



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.130.01-2	10	50.315.129.01-2	43.621.410.01-2 43.624.410.01-2	34.615.129.01-2		-	-	33.390.958.01-2	3	30°
-	-							33.490.958.01-2	4	
52.412.130.01-2	12							33.690.958.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER UNIGRIP	ANALOG	LAB SCANBODY
41.320.090.01-2	-	43.618.201.01-2	18	40.320.008.03-2	43.601.108.01-2	22.615.129.01-2	30.415.007.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	-	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0129	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0129
	DAS_I_12_0129		DAS_C_I_12_0129

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0130

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,5 mm				mm				mm				mm	
R	31.322.130.01-2	30°	29°	-	-	-	-	-	-	-	-	-	-
NR	31.312.130.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-		-	-	33.345.804.01-2	3	20°
-	-							33.445.804.01-2	4	
-	-							33.645.804.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	ANALOG	LAB SCANBODY
41.316.081.01-2	-	43.618.201.01-2	18	40.316.005.08-2	43.601.105.01-2	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0130	LAB SCANBODY	DAS_C_E_0130
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0131

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,5 mm				mm				mm				mm	
R	31.323.131.01-2	45°	29°	-	-	-	-	-	-	-	-	-	-
NR	31.313.131.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			



DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-		-	-	33.345.804.01-2	3	20°
-	-							33.445.804.01-2	4	
-	-							33.645.804.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	ANALOG	LAB SCANBODY
41.316.081.01-2	-	43.618.201.01-2	18	40.316.005.08-2	43.601.105.01-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0131	LAB SCANBODY	DAS_C_E_0131
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,5 mm				mm				mm				mm	
R	31.324.132.01-2	45°	28°	-	-	-	-	-	-	-	-	-	-
NR	31.314.132.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-		-	-	33.345.856.01-2	3	25°
								33.445.856.01-2	4	
-	-							33.645.856.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	ANALOG	LAB SCANBODY
41.316.081.01-2	-	43.618.201.01-2	18	40.316.005.08-2	43.601.105.01-2	-	30.414.003.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0132	LAB SCANBODY	DAS_C_E_0132
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1 mm				mm				mm				mm	
R	31.320.135.01-2	45°	-	-	-	-	-	-	-	-	-	-	-
NR	31.310.135.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-		-	-	-	-	-
								-	-	
-	-							-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	ANALOG	LAB SCANBODY
41.314.080.01-2	-	43.618.201.01-2	18	40.314.007.02-2	43.601.107.01-2	-	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0135	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0136

STANDARD DYNAMIC TIBASE®																	
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,7 mm				1,5 mm				mm				3 mm				5 mm	
R	31.320.136.01-2	45°	30°	31.320.136.02-2	25°	-	-	-	-	-	-	31.320.136.04-2	20°	-	-	31.320.136.05-2	20°
NR	31.310.136.01-2			31.310.136.02-2				-				31.310.136.04-2				31.310.136.05-2	

DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			



DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.128.01-2	10	50.310.136.01-2	43.621.415.01-2	34.610.136.01-2		-	-	33.360.754.01-2	3	25°
								33.460.754.01-2	4	
52.412.128.01-2	12							33.660.754.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.25	ANALOG	LAB SCANBODY
41.316.071.01-2	-	43.618.201.01-2	18	40.316.004.03-2	43.601.104.01-2	-	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0136	LAB SCANBODY	DAS_C_E_0136
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0136	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0136
	DAS_IG_10_0136		DAS_C_IG_10_0136
	DAS_I_12_0136		DAS_C_I_12_0136

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0137

STANDARD DYNAMIC TIBASE®																	
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,6 mm				mm				mm				mm				mm	
R	31.324.137.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.314.137.01-2			-				-				-				-	

DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			



DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-		-	-	-	-	-
								-	-	
-	-							-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	ANALOG	LAB SCANBODY
41.320.044.01-2	-	43.618.201.01-2	18	40.320.007.04-2	43.601.107.01-2	-	30.414.008.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0137	LAB SCANBODY	DAS_C_E_0137
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
1,5 mm				mm				mm				3 mm			
R	31.320.145.01-2	45°	-	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.310.145.01-2			-			-		-			-			



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-	-	-	-	-	-	-
-	-							-	-	
-	-							-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.315.078.01-2	-	43.618.201.01-2	18	-	-	-	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0145	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
1,5 mm				mm				mm				mm			
R	31.323.149.01-2	45°	29°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.313.149.01-2			-			-			-		-			



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.132.01-2	10	50.310.161.01-2	43.621.410.01-2 43.624.410.01-2	34.610.161.01-2	-	-	-	33.320.704.01-2*	3	25°
-	-							33.420.704.01-2*	4	
52.412.132.01-2	12							33.620.704.01-2*	6	

*Only for R

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.316.079.01-2	-	43.618.201.01-2	18	40.316.014.01-2	-	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0149	LAB SCANBODY	DAS_C_E_0149
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0149	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0149
	DAS_I_12_0149		DAS_C_I_12_0149

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

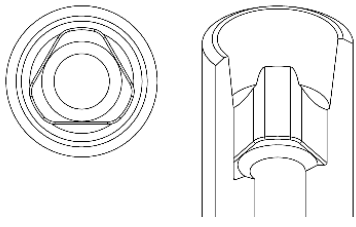

COMPATIBLE with 0150

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,5 mm		45°	-	mm		-	-	mm		-	-	mm		-	-
R	31.323.150.01-2			-	-			-	-			-	-		
NR	-			-	-			-	-			-	-		



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-		-	-	-	-	-
								-	-	
-	-								-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.25	ANALOG	LAB SCANBODY
41.314.046.01-2	-	43.618.201.01-2	18	40.314.004.04-2	43.601.104.01-2	-	30.413.005.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				


LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0150	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0151

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,3 mm		45°	30°	mm		-	-	mm		-	-	mm		-	-
R	31.323.151.01-2			-	-			-	-			-	-		
-	-			-	-			-	-			-	-		



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.409.123.01-2	9	50.313.151.01-2	43.621.410.01-2	34.613.151.01-2		-	-	33.390.716.01-2	3	30°
			43.624.410.01-2					33.490.716.01-2	4	
								33.690.716.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER -	ANALOG	LAB SCANBODY
41.314.039.01-2	-	43.618.201.01-2	18	-	-	-	-
		43.624.201.01-2	24				
		43.632.201.01-2	32				



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	-	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_9_0151	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_9_0151

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0152

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1 mm				2 mm				mm				mm	
R	31.320.152.01-2	45°	-	31.320.152.02-2	25°	-	-	-	-	-	-	-	-
NR	31.310.152.01-2			31.310.152.02-2				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.104.01-2	10	50.310.152.03-2 IG=3mm	43.621.410.01-2 43.624.410.01-2	34.610.152.01-2	-	-	33.360.756.01-2	3	25°
							33.460.756.01-2	4	
52.412.104.01-2	12						33.660.756.01-2	6	

*Only for R

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER		LAB SCANBODY
41.318.077.02-2	-	43.618.201.01-2	18	-	-	-	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0152	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_IG_10_0152	DYNAMIC μSCANBODY (LAB/CLIN)	-
	DAS_IG_12_0152		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0159

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1,5 mm				mm				mm				mm	
R	31.320.159.01-2	41°	17°	-	-	-	-	-	-	-	-	-	-
NR	31.310.159.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.128.01-2	10	50.310.159.01-2	43.621.415.01-2	34.610.159.01-2	-	-	33.335.754.01-2*	3	25°
							33.435.754.01-2*	4	
-	-						33.635.754.01-2*	6	

*Only for R

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER UNIGRIP		LAB SCANBODY
41.314.067.02-2	-	43.618.201.01-2	18	40.314.008.02-2	43.601.108.01-2	22.610.159.01-2	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0159	LAB SCANBODY	DAS_C_E_0159
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0159	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0159

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0160

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,5 mm				mm				mm				mm	
R	31.320.160.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-
NR	31.310.160.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}	
52.410.131.01-2	10	50.310.160.01-2	43.621.415.01-2	34.610.160.01-2	-	-	33.315.804.01-2	3	25°	23.410.160.01-2
							33.415.804.01-2	4		
52.412.131.01-2	12						33.615.804.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	LAB SCANBODY	
41.316.078.01-2	-	43.618.201.01-2	18	40.316.007.01-2	43.601.107.01-2	22.610.160.01-2	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0160	LAB SCANBODY	DAS_C_E_0160
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0160	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0160
	DAS_I_12_0160		DAS_C_I_12_0160
SCANALOG	DAS_SA_0160	SCANALOG	DAS_C_SA_0160

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0161

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1,5 mm				mm				mm				mm	
R	31.320.161.01-2	45°	25°	-	-	-	-	-	-	-	-	-	-
NR	31.310.161.01-2			-				-				-	



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}
52.410.132.01-2	10	50.310.161.01-2	43.621.415.01-2	34.610.161.01-2	-	-	33.320.704.01-2*	3	25°
							33.420.704.01-2*	4	
52.412.132.01-2	12						33.620.704.01-2*	6	

*Only for R

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER -	LAB SCANBODY	
41.316.079.01-2	-	43.618.201.01-2	18	40.316.014.01-2	-	-	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0161	LAB SCANBODY	DAS_C_E_0161
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0161	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0161
	DAS_I_12_0161		DAS_C_I_12_0161

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
1,5 mm				mm				mm				mm			
R	31.324.162.01-2	45°	24°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.314.162.01-2			-			-		-						



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.132.01-2	10	50.310.161.01-2	43.621.415.01-2	34.610.161.01-2	-	-	33.320.704.01-2*	3	25°
							33.420.704.01-2*	4	
52.412.132.01-2	12						33.620.704.01-2*	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.316.079.01-2	-	43.618.201.01-2	18	40.316.014.01-2	-	-	30.414.003.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0162	LAB SCANBODY	DAS_C_E_0162
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0162	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0162
	DAS_I_12_0162		DAS_C_I_12_0162

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,5 mm				mm				mm				mm			
R	31.323.163.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-
NR	-			-			-		-						



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.408.112.01-2	8	50.313.163.01-2	43.620.411.01-2	34.613.163.01-2	-	-	33.390.716.01-2	3	30°
							33.490.716.01-2	4	
							33.690.716.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.314.039.01-2	-	43.618.201.01-2	18	40.314.014.01-2	-	-	30.413.005.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0163	LAB SCANBODY	DAS_C_E_0163
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0163	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_8_0163

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0164

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
1,5 mm				mm			mm			mm			mm		
R	31.320.164.01-2	45°	21°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.310.164.01-2			-			-			-			-		



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.128.01-2	10	50.310.164.01-2	43.621.415.01-2	34.610.164.01-2	-	-	33.345.804.01-2*	3	25°
							33.445.804.01-2*	4	
52.412.128.01-2	12						33.645.804.01-2*	6	

*Only for **R**

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1,20	ANALOG	LAB SCANBODY
41.312.078.01-2	-	43.618.201.01-2	18	40.312.003.01-2	43.601.103.02-2	-	30.413.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0164	LAB SCANBODY	DAS_C_E_0164
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0164	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0164
	DAS_I_12_0164		DAS_C_I_12_0164

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0165

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
1 mm				mm			mm			mm			mm		
R	31.323.165.01-2	45°	25°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.313.165.01-2			-			-			-			-		



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.132.01-2	10	50.313.165.01-2	43.621.415.01-2	34.613.165.01-2	-	-	33.345.804.01-2*	3	30°
							33.445.804.01-2*	4	
52.412.132.01-2	12						33.645.804.01-2*	6	

*Only for **R**

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	ANALOG	LAB SCANBODY
41.314.076.01-2	-	43.618.201.01-2	18	40.314.003.03-2	43.601.103.02-2	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0165	LAB SCANBODY	DAS_C_E_0165
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0165	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0165
	DAS_I_12_0165		DAS_C_I_12_0165

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
0,9 mm				mm				mm				mm			
R	31.320.166.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.310.166.01-2			-			-		-						



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.410.128.01-2	10	50.310.166.03-2 IG=3mm	43.621.415.01-2	34.610.166.01-2
-	-			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.330.734.01-2	3	20°
33.430.734.01-2	4	
33.630.734.01-2	6	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.084.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.25
40.314.004.02-2	43.601.104.01-2

ANALOG	LAB SCANBODY
-	30.410.006.01-2

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,9 mm				mm				mm				mm			
R	31.322.167.01-2	43°	30°	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.312.167.01-2			-			-		-						



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.410.117.01-2	10	50.313.167.03-2 (IG= 3mm)	43.620.411.01-2 43.621.410.01-2 43.624.410.01-2	34.613.167.01-2
52.412.117.01-2	12			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.330.734.01-2	3	20°
33.430.734.01-2	4	
33.630.734.01-2	6	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.084.02-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.25
-	-


ANALOG	LAB SCANBODY
-	30.412.001.01-2

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0166	LAB SCANBODY	DAS_C_E_0166
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_IG_10_0166	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_IG_10_0166
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

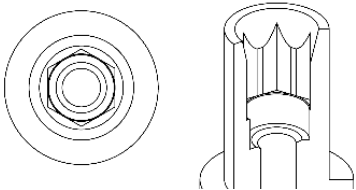


LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0167	LAB SCANBODY	DAS_C_E_0167
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_IG_10_0167	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_IG_10_0167
	DAS_IG_12_0167		DAS_C_IG_12_0167

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

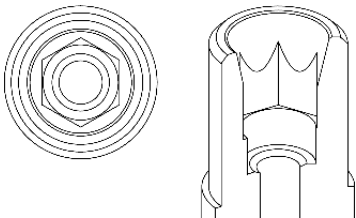

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,3 mm				mm				mm				mm			
R	31.323.168.01-2	45°	30°	-	-	-	-	-	-	-	-	-	-	-	-
NR	-			-			-		-						



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-		-	-	-	-	-
-	-							-	-	
-	-							-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.27	ANALOG	LAB SCANBODY
41.314.039.01-2	-	43.618.201.01-2	18	40.314.004.03-2	43.601.104.01-2	-	30.413.005.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0168	LAB SCANBODY	DAS_C_E_0168
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
0,6 mm				1,5 mm				mm				3 mm			
R	31.322.169.01-2	45°	29°	31.322.169.02-2	25	-	-	-	-	31.322.169.04-2	20	-	-	-	-
NR	31.312.169.01-2			31.312.169.02-2			-						31.312.169.04-2		



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.117.01-2	10	50.312.169.01-2 50.312.169.04-2 IG=3mm	43.621.410.01-2 43.624.410.01-2	34.612.169.01-2		-	-	33.330.734.01-2	3	25°
-	-							33.430.734.01-2	4	
52.412.117.01-2	12							33.630.734.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER -	ANALOG	LAB SCANBODY
41.317.070.01-2	-	43.618.201.01-2	18	-	-	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0169	LAB SCANBODY	DAS_C_E_0169
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0169 DAS_IG_10_0169	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0169 DAS_C_IG_10_0169
	DAS_I_12_0169 DAS_IG_12_0169		DAS_C_I_12_0169 DAS_C_IG_12_0169

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0170

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,3 mm				mm				mm				mm			
R	31.322.170.01-2	38°	-	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.312.170.01-2			-	-	-	-	-	-	-	-	-	-	-	-

DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
0,3 mm		CH=5mm	CH= 7mm	CH= 9mm
R	31.322.170.21-2	30°	20°	15°
NR	31.312.170.21-2			



DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL	
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK α_{di}
-	-	-	-	-		-	-	33.390.754.01-2	3
								33.490.754.01-2	4
-	-							33.690.754.01-2	6



DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20		LAB SCANBODY
41.316.079.02-2	-	43.618.201.01-2	18	-	-	-	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0170	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG= Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0171

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,3 mm				mm				mm				mm			
R	31.323.171.01-2	35°	-	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.313.171.01-2			-			-		-			-			

DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			



DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL	
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK α_{di}
-	-	-	-	-		-	-	33.390.754.01-2	3
								33.490.754.01-2	4
-	-							33.690.754.01-2	6



DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20		LAB SCANBODY
41.316.079.02-2	-	43.618.201.01-2	18	-	-	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0171	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0176

STANDARD DYNAMIC TIBASE®															
	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	0,5 mm			mm			mm			mm			mm		
R	-	35°	-	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.310.176.01-2			-			-			-			-		



DYNAMIC 3TIBASE®				
	GINGIVAL HEIGHT	α_s	α_s	α_s
	mm	CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.408.138.01-2	8	50.310.176.01-2	43.621.415.01-2	34.610.176.01-2
-	-			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.360.756.01-2	3	30°
33.460.756.01-2	4	
33.660.756.01-2	6	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.044.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
-	-

ANALOG	LAB SCANBODY
-	30.410.006.01-2

COMPATIBLE with 0178

STANDARD DYNAMIC TIBASE®															
	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c	GINGIVAL HEIGHT	α_s	α_c
	1,5 mm			mm			mm			mm			mm		
R	31.320.178.01-2	45°	-	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.310.178.01-2			-			-			-			-		



DYNAMIC 3TIBASE®				
	GINGIVAL HEIGHT	α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
-	-	-	-	-
-	-			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-
-	-	
-	-	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.080.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER -
-	-

ANALOG	LAB SCANBODY
-	30.410.006.01-2



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0178	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0181

STANDARD DYNAMIC TIBASE®															
	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c
	mm			mm			mm			mm			mm		
R	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NR	-			-			-			-			-		

DYNAMIC 3TIBASE®				
	GINGIVAL HEIGHT	α_s	α_s	α_s
	0,4 mm	CH=5mm	CH= 7mm	CH= 9mm
R	31.322.181.21-2	-	-	-
NR	-	30°	25°	10°



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL			SCANALOG	
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME		α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}	
52.408.112.01-2	8	50.312.181.01-2	43.620.411.01-2	-	-	-	-	33.360.756.01-2	3	30°	23.412.181.01-2
								33.460.756.01-2	4		
-	-							33.660.756.01-2	6		

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.318.043.01-2	-	43.618.201.01-2	18	-	-	-	-
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0181	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0181	DYNAMIC μSCANBODY (LAB/CLIN)	-
SCANALOG	DAS_SA_0101	SCANALOG	-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0183

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
0,5 mm				mm				mm				mm			
R	31.322.183.01-2	45°	-	-	-	-	-	-	-	-	-	-	-	-	-
NR	-			-			-		-			-			

DYNAMIC 3TIBASE®				
	GINGIVAL HEIGHT	α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-	-	-	-



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT- CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK	α _{di}
52.408.136.01-2	8	50.312.183.01-2	43.620.411.01-2	34.612.183.01-2	-	-	33.330.734.01-2	3	30°
							33.430.734.01-2	4	
-	-						33.630.734.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.316.048.02-2	-	43.618.201.01-2	18	-	-	-	-
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	-	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_0183	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
1,2 mm				2,5 mm				3,5 mm				mm			
R	31.323.186.01-2	40°	30°	31.323.186.02-2	20°	18°	31.323.186.03-2	15°	-	-	°	°	-	°	°
NR	31.313.186.01-2			31.313.186.02-2			31.313.186.03-2			-	°	°	-	°	°



DYNAMIC 3TIBASE®								
GINGIVAL HEIGHT			GINGIVAL HEIGHT			GINGIVAL HEIGHT		
1,2 mm			2,5 mm			CH= 9mm		
CH=5mm			CH= 7mm			CH= 9mm		
R	31.323.186.21-2	30°	25°	15°	31.323.186.22-2	30°	25°	15°
NR	31.313.186.21-2				31.313.186.22-2			



DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL	
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK α _{di}
52.408.101.01-2	8	50.313.186.04-2 (IG=3mm)	43.621.410.01-2 43.624.410.01-2	34.613.186.01-2		-	-	33.330.734.01-2	3
52.410.101.01-2	10							33.430.734.01-2	4
52.412.101.01-2	12							33.630.734.01-2	6

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER		LAB SCANBODY
41.316.084.02-2	-	43.618.201.01-2	18	-	-	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0186	LAB SCANBODY	DAS_C_E_0186
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_IG_8_0186	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_IG_8_0186
	DAS_IG_10_0186		DAS_C_IG_10_0186
	DAS_IG_12_0186		DAS_C_IG_12_0186

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor (3mm)

α_s = Standard maximum angulation
α_c = Captive maximum angulation
α_{di} = Direct to implant maximum angulation
α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®														
GINGIVAL HEIGHT			GINGIVAL HEIGHT			GINGIVAL HEIGHT			GINGIVAL HEIGHT			GINGIVAL HEIGHT		
0,3 mm			0,5 mm			1 mm			mm			mm		
R	31.322.009.01-2	45°	25°	31.322.009.02-2	25°	25°	31.322.009.03-2	25°	-	-	-	-	-	-
NR	31.312.009.01-2			31.312.009.02-2			31.312.009.03-2		-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α _s	α _c	α _s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-	-	-	-

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL	
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α _{dp}	DYNAMIC MILLING TOOL	SHANK α _{di}
52.410.114.01-2	10	50.312.187.01-2	43.621.410.01-2 43.624.410.01-2	34.612.187.01-2		-	-	33.390.716.01-2	3
								33.490.716.01-2	4
52.412.114.01-2	12							33.690.716.01-2	6

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER		LAB SCANBODY
41.316.059.01-2	-	43.618.201.01-2	18	-	-	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES



STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0187	LAB SCANBODY	DAS_C_E_0187
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0187	DYNAMIC μSCANBODY (LAB/CLIN)	DAS_C_I_10_0187
	DAS_I_12_0187		DAS_C_I_12_0187

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
α_c = Captive maximum angulation
α_{di} = Direct to implant maximum angulation
α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0188

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1,5 mm				mm				3,5 mm				mm	
R	31.320.188.01-2	45°	-	-	-	-	-	-	-	-	-	-	-
NR	31.310.188.01-2			-	-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-	-	-	-	-	-
-	-						-	-	
-	-						-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.315.078.01-2	-	43.618.201.01-2	18	-	-	-	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

COMPATIBLE with 0190

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1,8 mm				mm				mm				mm	
R	31.320.190.01-2	45°	-	-	-	-	-	-	-	-	-	-	-
NR	31.310.190.01-2			-	-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-	-	-	-	-	-
-	-						-	-	
-	-						-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.316.084.02-2	-	43.618.201.01-2	18	-	-	-	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
0,8 mm				mm				mm				mm			
R	31.322.191.01-2	45°	-	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.312.191.01-2			-	-	-	-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
-	-	-	-	-
-	-			
-	-			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-
-	-	
-	-	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.084.02-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER
-	-

ANALOG	LAB SCANBODY
-	30.412.001.01-2

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c
0,3 mm				mm			mm			mm			mm		
R	31.323.192.01-2	45°	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-			-	-	-	-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
-	-	-	-	-
-	-			
-	-			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-
-	-	
-	-	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.048.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER
-	-

ANALOG	LAB SCANBODY
-	30.413.005.01-2



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0192	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-
	-		-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
0,3 mm				mm				mm				mm			
R	31.323.193.01-2	45°	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-			-	-	-	-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
-	-	-	-	-
-	-			
-	-			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-
-	-	
-	-	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.318.051.02-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER
-	-

ANALOG	LAB SCANBODY
-	30.413.005.01-2

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c	GINGIVAL HEIGHT	α _s	α _c
0,5 mm				mm			mm			mm			mm		
R	31.323.195.01-2	45°	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-			-	-	-	-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	31.323.195.21-2	30°	25°	20°
NR	-			



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
-	-	-	-	-
-	-			
-	-			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-
-	-	
-	-	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.317.041.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER
-	-

ANALOG	LAB SCANBODY
-	30.413.005.01-2


LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0195	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-
	-		-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
1,2 mm				2 mm				3 mm				mm			
R	31.320.196.01-2	40°	-	31.320.196.02-2	25°	-	31.320.196.03-2	25°	-	-	°	°	-	°	°
NR	31.310.196.01-2			31.310.196.02-2			31.310.196.03-2			-	°	°	-	°	°



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
-	-	-	-	-
-	-			
-	-			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-
-	-	
-	-	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.086.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER
-	-

ANALOG	LAB SCANBODY
-	30.410.006.01-2

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
1,2 mm				2 mm				3 mm				mm			
R	31.322.197.01-2	35°	-	31.322.197.02-2	20°	-	31.322.197.03-2	20°	-	-	°	°	-	°	°
NR	31.312.197.01-2			31.312.197.02-2			31.312.197.03-2			-	°	°	-	°	°



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
-	-	-	-	-
-	-			
-	-			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-
-	-	
-	-	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.086.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER
-	-

ANALOG	LAB SCANBODY
-	30.412.001.01-2



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0197	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0198

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
1,2 mm				mm				mm				mm			
R	31.324.198.01-2	40°	-	-	-	-	-	-	-	°	°	-	°	°	
NR	31.314.198.01-2			-			-		-						



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-	-	-	-	-	-	-
								-	-	
-	-							-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.316.086.01-2	-	43.618.201.01-2	18	-	-	-	30.414.003.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0198	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

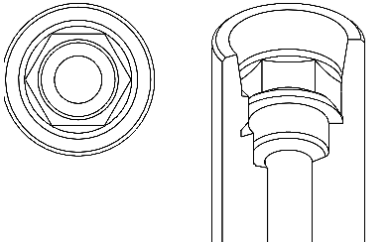

COMPATIBLE with 0205

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
0,3 mm				mm				mm				mm			
R	31.322.205.01-2	45°	-	-	°	°	-	°	°	-	°	°	-	°	°
NR	-			-	°	°	-	°	°	-	°	°	-	°	°



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.408.112.01-2	8	50.312.205.01-2	43.620.411.01-2	34.612.205.01-2	-	-	-	33.390.716.01-2	3	30°
								33.490.716.01-2	4	
-	-							33.690.716.01-2	6	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER	ANALOG	LAB SCANBODY
41.317.040.01-2	-	43.618.201.01-2	18	-	-	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0205	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_8_205	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

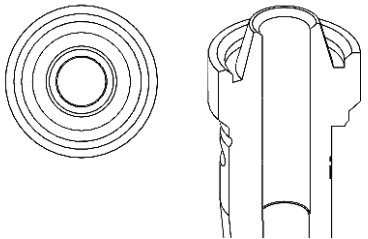

COMPATIBLE with 0207

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1,5 mm				mm				3 mm				4 mm	
R	31.320.207.01-2	35°	-	-	-	-	-	31.320.207.03-2	20°	-	-	31.320.207.04-2	15°
NR	31.310.207.01-2			-				31.310.207.03-2				-	

DYNAMIC 3TIBASE®							
GINGIVAL HEIGHT		α_s	α_s	α_s	α_s	α_s	α_s
1,5 mm		CH=5mm	CH= 7mm	CH= 9mm	3 mm	CH=5mm	CH= 7mm
						CH= 7mm	CH= 9mm



DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.103.01-2	10	50.310.207.03-2 IG=3mm	43.621.410.01-2 43.624.410.01-2	34.610.207.01-2	-	-	33.345.856.01-2*	3	30°
							33.445.856.01-2*	4	
52.412.103.01-2	12						33.645.856.01-2*	6	

*Only for **R**

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER		LAB SCANBODY
41.316.066.01-2	-	43.618.201.01-2	18	-	-	-	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0207	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_IG_10_0207	DYNAMIC μSCANBODY (LAB/CLIN)	-
	DAS_IG_12_0207		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0208

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
1,5 mm				mm				mm				mm	
R	31.324.208.01-2	45°	-	-	-	-	-	-	-	-	-	-	-
NR	31.314.208.01-2			-				-				-	

DYNAMIC 3TIBASE®			
GINGIVAL HEIGHT		α_s	α_s
		CH=5mm	CH= 7mm
-	-	-	-
-	-		

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.103.01-2	10	50.310.207.03-2 IG=3mm	43.621.410.01-2 43.624.410.01-2	34.614.208.01-2	-	-	33.345.856.01-2*	3	30°
							33.445.856.01-2*	4	
52.412.103.01-2	12						33.645.856.01-2*	6	

*Only for **R**

DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER		LAB SCANBODY
41.316.066.01-2	-	43.618.201.01-2	18	-	-	-	30.414.003.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				



LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0208	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_IG_10_0208	DYNAMIC μSCANBODY (LAB/CLIN)	-
	DAS_IG_12_0208		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG = Adaptor 3mm
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,5 mm				mm				mm				mm	
R	31.320.229.01-2	40°	-	-	-	-	-	-	-	-	-	-	-
NR	31.310.229.01-2			-				-				-	

DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
-	-	-	-	-
-	-			
-	-			


DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.064.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

LIBRARY CODES			
STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0229	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,3 mm				mm				mm				mm	
R	31.323.247.01-2	40°	-	-	-	-	-	-	-	-	-	-	-
NR				-				-				-	

DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
-	-	-	-	-
-	-			
-	-			


DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.040.01-2	40.316.007.01-2	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

LIBRARY CODES			
STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0247	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



COMPATIBLE with 0249

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c
1 mm				mm				mm				mm			
R	31.320.249.01-2	40°	-	-	-	-	-	-	-	-	-	-	-	-	-
NR	31.310.249.01-2			-	-	-	-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
mm		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
52.410.128.01-2	10	50.310.249.03-2 IG=3mm	43.621.415.01-2	34.610.249.01-2
-	-			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
33.315.804.01-2	3	25°
33.415.804.01-2	4	
33.615.804.01-2	6	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.314.080.01-2	-	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER Hex. 1.20
-	-

ANALOG	
LAB SCANBODY	
-	30.410.006.01-2

COMPATIBLE with 0251

STANDARD DYNAMIC TIBASE®															
GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c	GINGIVAL HEIGHT		α _s	α _c
1mm				1,5 mm				3 mm				mm			
R	31.322.251.01-2	40°	-	31.322.251.02-2	40°	-	31.322.251.04-2	25°	-	-	-	-	-	-	-
NR	31.312.251.01-2			31.312.251.02-2			31.312.251.04-2			-					



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG
-	-	-	-	-
-	-			

DYNAMIC PRE-MILLED	
COBALT-CHROME	α_{dp}
-	-

DYNAMIC MILLING TOOL		
DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-
-	-	
-	-	

DYNAMIC SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)
41.316.064.02-2	40.316.007.01-2	43.618.201.01-2	18
		43.624.201.01-2	24
		43.632.201.01-2	32

STRAIGHT SCREWS	
STRAIGHT SCREW	SCREWDRIVER -
-	-

ANALOG	
LAB SCANBODY	
-	30.412.001.01-2


LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0251	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,5 mm				mm				mm				mm	
R	31.324.262.01-2	40°	-	-	-	-	-	-	-	-	-	-	-
NR	31.314.262.01-2			-				-				-	

DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
mm		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
52.410.103.01-2	10	50.310.207.03-2 IG=3mm	43.621.410.01-2 43.624.410.01-2	34.614.262.01-2	-	-	33.345.856.01-2	3	25°
							33.445.856.01-2	4	
52.410.103.01-2	12						33.645.856.01-2	6	


DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20		LAB SCANBODY
41.316.066.01-2	-	43.618.201.01-2	18	-	-	-	30.414.008.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0262	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0262	DYNAMIC μSCANBODY (LAB/CLIN)	-
	DAS_I_12_0262		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG= Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,5 mm				mm				mm				mm	
R	31.320.266.01-2	35°	-	-	-	-	-	-	-	-	-	-	-
NR	31.310.266.01-2			-				-				-	

DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
mm		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-			

DYNAMIC μSCANBODY (LAB/CLIN)				DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG	COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-	-	-	-	-	-
							-	-	
-	-						-	-	


DYNAMIC SCREWS				STRAIGHT SCREWS		ANALOG	
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20		LAB SCANBODY
41.320.068.01-2	-	43.618.201.01-2	18	-	-	-	30.410.006.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES

STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0266	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0266 DAS_IG_10_0266	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS
GH = Gingival Height
CH = Cement Height
IG= Adaptor (3mm)
 α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,5 mm				mm				mm				mm	
R	31.322.267.01-2	40°	-	-	-	-	-	-	-	-	-	-	-
NR	31.312.267.01-2		-	-	-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
-	-	-	-	-
-	-	-	-	-

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-	-	-	-	-	-	-
-	-							-	-	
-	-							-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER TORX T6	ANALOG	LAB SCANBODY
41.320.068.01-2	-	43.618.201.01-2	18	40.320.007.02-2	43.601.107.01-2	-	30.412.001.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0267	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	-	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height

α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging

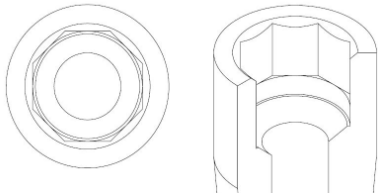

STANDARD DYNAMIC TIBASE®													
GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT		α_s	α_c	GINGIVAL HEIGHT	
0,5 mm				mm				mm				mm	
R	31.320.266.01-2	35°	-	-	-	-	-	-	-	-	-	-	-
NR	31.310.266.01-2		-	-	-	-	-	-	-	-	-	-	-



DYNAMIC 3TIBASE®				
GINGIVAL HEIGHT		α_s	α_s	α_s
		CH=5mm	CH= 7mm	CH= 9mm
R	-	-	-	-
NR	-	-	-	-

DYNAMIC μSCANBODY (LAB/CLIN)					DIGITAL ANALOG	DYNAMIC PRE-MILLED		DYNAMIC MILLING TOOL		
SCANBODY	HEIGHT mm	ADAPTOR	SCREWDRIVER ADAPTOR	DIGITAL ANALOG		COBALT-CHROME	α_{dp}	DYNAMIC MILLING TOOL	SHANK	α_{di}
-	-	-	-	-	-	-	-	-	-	-
-	-							-	-	
-	-							-	-	

DYNAMIC SCREWS				STRAIGHT SCREWS			
DYNAMIC SCREW	HIGH DYNAMIC SCREW	DYNAMIC SCREWDRIVER	SCREWDRIVER LENGTH (mm)	STRAIGHT SCREW	SCREWDRIVER Hex. 1.20	ANALOG	LAB SCANBODY
41.320.068.01-2	-	43.618.201.01-2	18	-	-	-	30.413.002.01-2
		43.624.201.01-2	24				
		43.632.201.01-2	32				

LIBRARY CODES


STANDARD LIBRARY		CAPTIVE SCREW LIBRARY	
LAB SCANBODY	DAS_E_0268	LAB SCANBODY	-
DYNAMIC μSCANBODY (LAB/CLIN)	DAS_I_10_0268 DAS_IG_10_0268	DYNAMIC μSCANBODY (LAB/CLIN)	-
	-		-

LIBRARY OPTIONS

GH = Gingival Height
CH = Cement Height
IG= Adaptor (3mm)



α_s = Standard maximum angulation
 α_c = Captive maximum angulation
 α_{di} = Direct to implant maximum angulation
 α_{dp} = Dynamic Premilled maximum angulation

R = Rotational / Non-Engaging
NR = Non Rotational / Engaging



DYNAMIC SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
41.312.078.01-2	1,2	15 N-cm	7,8	2,65	6	6,55	1,25	2,3	conical	45°	45° Chamfer	HEXALOBULAR 1,70
41.314.039.01-2	1,4	15 N-cm	3,9	1,8	2,1	-	1,8	2,4	straight	-	45° Chamfer	
41.314.040.01-2	1,4	15 N-cm	4	1,85	2	2,78	1,22	2,3	conical	30°	45° Chamfer	
41.314.040.02-2	1,4	15 N-cm	4	1,7	2,25	2,7	1,3	2,3	conical	45°	45° Chamfer	
41.314.043.01-2	1,4	15 N-cm	4,3	1,8	2,03	2,9	1,4	2,3	conical	35°	45° Chamfer	
41.314.044.01-2	1,4	15 N-cm	4,4	2,15	2,73	3	1,4	2,3	conical	60°	45° Chamfer	
41.314.045.01-2	1,4	15 N-cm	4,5	2,3	2,5	3,28	1,22	2,3	conical	30°	45° Chamfer	
41.314.046.01-2	1,4	15 N-cm	4,6	2,5	4,6	3,17	1,43	2,3	conical	35°	45° Chamfer	
41.314.052.01-2	1,4	15 N-cm	5,2	2,9	3,4	-	1,8	2,3	straight	-	45° Chamfer	
41.314.064.01-2	1,4	15 N-cm	6,4	2,2	4,21	5,15	1,25	2,3	conical	25°	45° Chamfer	
41.314.067.01-2	1,4	15 N-cm	6,7	2,31	5	5,45	1,25	2,3	conical	45°	45° Chamfer	
41.314.067.02-2	1,4	15 N-cm	6,7	2,5	4,71	5,5	1,2	2,3	conical	35°	45° Chamfer	
41.314.070.01-2	1,4	15 N-cm	7	2,3	5,39	5,65	1,61	2,3	conical	60°	45° Chamfer	
41.314.074.01-2	1,4	15 N-cm	7,4	3,55	5	5,99	1,41	2,3	conical	25°	45° Chamfer	
41.314.076.01-2	1,4	15 N-cm	7,6	2,4	5,9	6,35	1,25	2,3	conical	45°	45° Chamfer	
41.314.080.01-2	1,4	15 N-cm	8	2,1	4,96	6,8	1,2	2,3	conical	15°	45° Chamfer	
41.314.084.01-2	1,4	15 N-cm	8,4	2,5	5,92	6,85	1,55	2,3	conical	35°	45° Chamfer	
41.314.105.01-2	1,4	15 N-cm	10,5	2,31	5	5,45	5,05	2,3	conical	45°	45° Chamfer	
41.315.078.01-2	N0-80	15 N-cm	7,8	2,45	5,77	6	1,8	2,3	conical	65°	45° Chamfer	
41.315.040.01-2	1,6	20 N-cm	4	2,07	2,3	2,47	1,53	2,3	conical	65°	45° Chamfer	
41.316.044.01-2	1,6	20 N-cm	4,4	2,5	2,9	-	1,5	2,3	straight	-	Semi-sphere	
41.316.048.01-2	1,6	20 N-cm	4,8	2,4	2,93	1,87	1,3	2,3	conical	45°	45° Chamfer	
41.316.048.02-2	1,6	20 N-cm	4,8	2,4	3	3,58	1,22	2,3	conical	31°	45° Chamfer	
41.316.055.01-2	1,6	20 N-cm	5,5	2,4	2,85	4,2	1,3	2,3	conical	23°	45° Chamfer	
41.316.059.01-2	1,6	20 N-cm	5,9	3	4,4	-	1,5	2,3	straight	-	Semi-sphere	
41.316.064.01-2	1,6	20 N-cm	6,4	3,15	4,7	5	1,4	2,3	conical	60°	45° Chamfer	
41.316.066.01-2	1,6	20 N-cm	6,6	1,9	4,7	5,2	1,9	2,3	conical	45°	45° Chamfer	

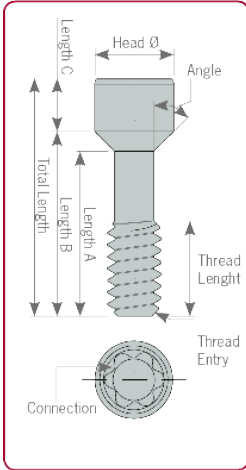
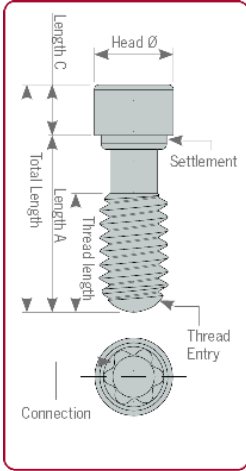


REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
41.316.071.01-2	1,6	20 N-cm	7,1	2,8	5,2	5,53	1,57	2,3	conical	60°	45° Chamfer	HEXALOBULAR 1,70
41.316.072.01-2	1,6	20 N-cm	7,2	3,5	5,2	5,85	1,35	2,3	conical	30°	45° Chamfer	
41.316.073.01-2	1,6	20 N-cm	7,3	2,2	4,87	5,56	1,74	2,3	conical	35°	45° Chamfer	
41.316.074.01-2	1,6	20 N-cm	7,4	2,7	5,5	6	1,4	2,3	conical	45°	45° Chamfer	
41.316.076.01-2	1,6	20 N-cm	7,6	3,6	6,1	-	1,5	2,3	straight	-	Semi-sphere	
41.316.078.01-2	1,6	20 N-cm	7,8	2	5,36	7,03	0,81	2,3	conical	15°	45° Chamfer	
41.316.079.01-2	1,6	20 N-cm	7,9	2,30	5,42	6,60	1,3	2,3	conical	20°	45° Chamfer	
41.316.079.02-2	1,6	20 N-cm	7,9	3,9	6,3	-	1,6	2,3	straight	-	45° Chamfer	
41.316.080.01-2	1,6	20 N-cm	8	3,14	6,3	6,51	1,49	2,3	conical	60°	45° Chamfer	
41.316.081.01-2	1,6	20 N-cm	8,1	3	6,35	6,72	1,38	2,3	conical	45°	45° Chamfer	
41.316.084.01-2	1,6	20 N-cm	8,4	3,5	6,8	-	1,6	2,3	straight	-	Semi-sphere	
41.316.084.02-2	1,6	20 N-cm	8,4	2,7	5,85	6,85	1,55	2,3	conical	30°	45° Chamfer	
41.316.086.01-2	1,6	20 N-cm	8,6	3	7,2	-	1,4	2,3	straight	-	45° Chamfer	
41.316.094.01-2	1,6	20 N-cm	9,4	2,9	7,65	8	1,4	2,3	conical	45°	45° Chamfer	
41.316.108.01-2	1,6	20 N-cm	10,8	2	5,36	7,03	0,81	2,3	conical	15°	45° Chamfer	
41.316.115.01-2	1,6	20 N-cm	11,5	3,5	5,2	5,85	6,3	2,3	conical	30°	45° Chamfer	
41.316.118.01-2	1,6	20 N-cm	11,8	3,6	6,1	-	5,7	2,3	straight	-	Semi-sphere	
41.316.124.01-2	1,6	20 N-cm	12,4	2,2	4,74	5,56	5,24	2,3	conical	35°	45° Chamfer	
41.316.132.01-2	1,6	20 N-cm	13,2	2,9	7,62	8	5,2	2,3	conical	45°	45° Chamfer	
41.317.040.01-2	N1-72	25 N-cm	4	2,1	2,5	-	1,5	2,3	sraight	-	45° Chamfer	
41.317.041.01-2	N1-72	25 N-cm	4,1	1,9	2,3	2,67	1,43	2,3	conical	55°	45° Chamfer	
41.317.065.01-2	N1-72	25 N-cm	6,5	2,4	4,7	5,18	1,33	2,3	conical	45°	45° Chamfer	
41.317.070.01-2	N1-72	25 N-cm	7	2,2	4,96	5,8	1,2	2,3	conical	30°	45° Chamfer	
41.317.071.01-2	N1-72	25 N-cm	7,1	2,5	5,56	5,65	1,45	2,3	conical	70°	45° Chamfer	
41.317.072.01-2	N1-72	25 N-cm	7,2	2,5	5,5	5,77	1,43	2,3	conical	60°	45° Chamfer	
41.317.073.01-2	N1-72	25 N-cm	7,3	2,5	5,5	5,77	1,53	2,3	conical	60°	45° Chamfer	
41.317.106.01-2	N1-72	25 N-cm	10,6	2,6	5,54	5,65	4,95	2,3	conical	70°	Semi-sphere	
41.318.043.01-2	1,8	25 N-cm	4,3	2	2,52	2,7	1,6	2,3	conical	55°	45° Chamfer	
41.318.044.01-2	1,8	25 N-cm	4,4	2,75	3	-	1,4	2,3	straight	-	Semi-sphere	



DYNAMIC SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
41.318.045.01-2	1,8	25 N-cm	4,5	2,3	2,81	2,9	1,6	2,3	conical	70°	45° Chamfer	Hexalobular 1,70
41.318.048.01-2	1,8	25 N-cm	4,8	2,8	3,22	3,65	1,15	2,3	conical	30°	Semi-sphere	
41.318.051.01-2	1,8	25 N-cm	5,1	2,7	3,55	3,7	1,4	2,3	conical	60°	45° Chamfer	
41.318.051.02-2	1,8	25 N-cm	5,1	2,7	3,55	3,7	1,4	2,3	conical	45°	45° Chamfer	
41.318.064.01-2	1,8	25 N-cm	6,4	3,45	4,73	5,1	1,3	2,3	conical	35°	45° Chamfer	
41.318.065.01-2	1,8	25 N-cm	6,5	2,8	5	-	1,5	2,3	straight	-	Semi-sphere	
41.318.067.01-2	1,8	25 N-cm	6,7	2,35	5	5,4	1,3	2,3	conical	45°	45° Chamfer	
41.318.068.01-2	1,8	25 N-cm	6,8	4	5,25	5,4	1,4	2,3	conical	60°	45° Chamfer	
41.318.071.01-2	1,8	25 N-cm	7,1	2,6	5,56	5,65	1,45	2,3	conical	70°	45° Chamfer	
41.318.074.01-2	1,8	25 N-cm	7,4	3,8	5,8	6,03	1,6	2,3	conical	50°	45° Chamfer	
41.318.075.01-2	1,8	25 N-cm	7,5	3,3	6,1	-	1,4	2,3	straight	-	Semi-sphere	
41.318.076.01-2	1,8	25 N-cm	7,6	2,52	5,8	6,2	1,4	2,3	conical	45°	45° Chamfer	
41.318.077.02-2	1,8	25 N-cm	7,7	2	6,09	6,35	1,35	2,3	conical	60°	45° Chamfer	
41.318.080.01-2	1,8	25 N-cm	8	4	6,5	-	1,5	2,3	straight	-	45° Chamfer	
41.318.083.01-2	1,8	25 N-cm	8,3	4,25	6,79	6,95	1,35	2,3	conical	60°	45° Chamfer	
41.320.038.01-2	2	25 N-cm	3,81	1,6	3,25	2,35	1,39	2,35	conical	70°	20° Chamfer	
41.320.044.01-2	2	25 N-cm	4,4	2,45	2,45	3,1	1,3	2,3	conical	45°	45° Chamfer	
41.320.047.01-2	2	25 N-cm	4,7	3	3,3	-	1,4	2,3	straight	-	Semi-sphere	
41.320.048.01-2	2	25 N-cm	4,8	2,7	3,3	3,4	1,4	2,3	conical	60°	45° Chamfer	
41.320.050.01-2	2	25 N-cm	5	2,8	3,39	3,6	1,4	2,3	conical	30°	Semi-sphere	
41.320.051.01-2	2	25 N-cm	5,1	3,1	3,6	-	1,5	2,3	straight	-	Semi-sphere	
41.320.060.01-2	2	25 N-cm	6	2,7	4,5	-	1,5	2,3	straight	-	Semi-sphere	
41.320.065.01-2	2	25 N-cm	6,5	2,7	5	-	1,5	2,3	straight	-	45° Chamfer	
41.320.067.01-2	2	25 N-cm	6,7	2,3	3,65	5,68	1,02	2,58	conical	15°	45° Chamfer	
41.320.068.01-2	2	25 N-cm	6,8	4,4	5,3	5,4	1,4	2,3	conical	60°	45° Chamfer	

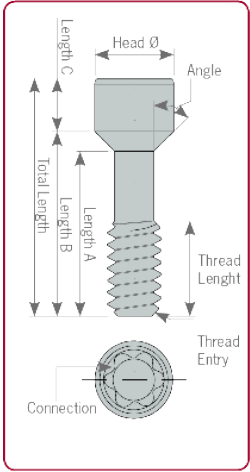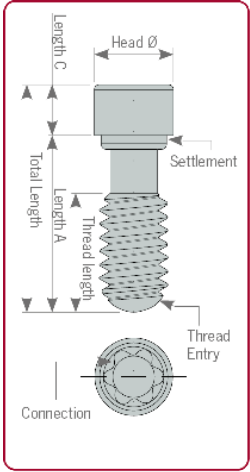

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
41.320.070.01-2	2	25 N-cm	7	3	5,6	-	1,4	2,3	straight	-	Semi-sphere	Hexalobular 1,70
41.320.074.01-2	2	25 N-cm	7,4	3,3	6	-	1,4	2,3	straight	-	Semi-sphere	
41.320.075.01-2	2	25 N-cm	7,5	2,75	5,93	6,18	1,32	2,3	conical	35°	45° Chamfer	
41.320.079.01-2	2	25 N-cm	7,9	3,3	6,33	6,5	1,4	2,3	conical	45°	45° Chamfer	
41.320.082.01-2	2	25 N-cm	8,2	4,7	6,7	-	1,5	2,4	straight	-	Semi-sphere	
41.320.090.01-2	2	25 N-cm	9	4	7,5	-	1,5	2,3	straight	-	Semi-sphere	
41.320.094.01-2	2	25 N-cm	9,4	3	7,85	8	1,4	2,3	conical	45°	45° Chamfer	
41.320.117.01-2	2	25 N-cm	11,7	2,75	5,9	6,18	5,52	2,3	conical	35°	Semi-sphere	
41.320.125.01-2	2	25 N-cm	12,5	3,3	6,33	6,5	6	2,3	conical	45°	45° Chamfer	
41.320.129.01-2	2	25 N-cm	12,9	4,7	6,7	-	6,2	2,4	straight	-	Semi-sphere	
41.320.137.01-2	2	25 N-cm	13,7	4	12,2	-	1,5	2,3	straight	-	Semi-sphere	
41.325.054.01-2	2,5	25 N-cm	5,4	3,8	4,1	-	1,3	2,85	straight	-	Semi-sphere	
41.325.067.01-2	2,5	25 N-cm	6,7	4,6	5,1	-	1,6	2,85	straight	-	Semi-sphere	

DYNAMIC SCREWDRIVER & DYNAMIC SCREWS

Dynamic Screwdrivers

Screwdriver with hexalobular head, exclusively to the 3.0 Dynamic Abutment® system.

Lengths: 18, 24, 32mm.



Dynamic Screws are used with the Dynamic TiBase® or milled structures with an angled screw channel. Made of Titanium grade V.





High Dynamic Screw

Dynamic Screw

STRAIGHT SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
40.312.003.01-2	1,2	15 N-cm	7,85	2,7	6,19	6,55	1,3	1,9	conical	45°	45° Chamfer	Hex. 1,20
40.314.003.01-2	1,4	15 N-cm	3,9	1,91	2,1	-	1,8	2,4	straight	-	45° Chamfer	Hex. 1,20
40.314.003.02-2	1,4	15 N-cm	4	2	2,2	-	1,8	2,3	straight	-	45° Chamfer	Hex. 1,20
40.314.003.03-2	1,4	15 N-cm	7,6	2,4	6,05	6,3	1,3	1,9	conical	45°	45° Chamfer	Hex. 1,20
40.314.003.04-2	1,4	15 N-cm	7,5	2,5	5,45	5,7	1,8	1,85	conical	45°	45° Chamfer	Hex. 1,20
40.314.004.01-2	1,4	15 N-cm	6,3	1,7	4,6	5,1	1,2	2,1	conical	25°	30° Chamfer	Hex. 1,25
40.314.004.02-2	1,4	15 N-cm	8,4	2,5	5,99	6,7	1,7	2	conical	35°	45° Chamfer	Hex. 1,25
40.314.004.03-2	1,4	15 N-cm	4,3	1,8	2,3	-	2	2	straight	-	45° Chamfer	Hex. 1,25
40.314.005.01-2	1,4	15 N-cm	7,6	3,55	5,17	6	1,6	2,15	conical	25°	45° Chamfer	Hex. 1,27
40.314.005.02-2	1,4	15 N-cm	7,5	2,5	5,5	5,7	1,7	2,1	conical	60°	45° Chamfer	Hex. 1,27
40.314.005.04-2	1,4	15 N-cm	4	1,70	2,25	-	1,75	2,10	straight	-	45° Chamfer	Hex. 1,27
40.314.007.01-2	1,4	15 N-cm	4	1,8	2,01	2,8	1,2	2,2	conical	35°	45° Chamfer	Torx T6
40.314.007.02-2	1,4	15 N-cm	7	2,1	4,75	2,25	0,8	2,1	conical	15°	45° Chamfer	Torx T6
40.314.008.01-2	1,4	15 N-cm	3,5	1,8	2,1	-	1,4	2	straight	-	45° Chamfer	Unigrip
40.314.008.02-2	1,4	15 N-cm	6,7	2,5	4,87	5,3	1,4	1,8	conical	35°	45° Chamfer	Unigrip
40.314.012.01-2	1,4	15 N-cm	4,5	1,7	2,01	2,4	2,1	2,15	conical	45°	45° Chamfer	Star 1,50
40.314.014.01-2	1,4	15 N-cm	4,45	2	2,48	-	1,97	2,16	straight	-	45° Chamfer	Hex. 1,19
40.316.002.01-2	1,6	20 N-cm	7	2,79	4,86	5,44	1,56	2,3	conical	45°	45° Chamfer	Sq. 1,30
40.316.002.02-2	1,6	20 N-cm	9,3	3,3	7,3	-	2	2,3	straight	-	Semi-sphere	Sq. 1,30
40.316.003.01-2	1,6	20 N-cm	8,4	2,5	6,6	-	1,8	2	straight	-	45° Chamfer	Hex. 1,20
40.316.003.02-2	1,6	20 N-cm	10,2	2	7,88	8,2	2	2,2	conical	45°	45° Chamfer	Hex. 1,20
40.316.004.01-2	1,6	20 N-cm	8,6	2,7	6,16	6,9	1,7	2	conical	30°	45° Chamfer	Hex. 1,25
40.316.004.02-2	1,6	20 N-cm	8,8	3	6,73	6,8	1,8	2,1	conical	45°	45° Chamfer	Hex. 1,25
40.316.004.03-2	1,6	20 N-cm	6,9	2,2	5,02	5,2	1,7	1,92	conical	60°	45° Chamfer	Hex. 1,25
40.316.005.01-2	1,6	20 N-cm	7,5	3,6	5,33	5,85	1,65	2,15	conical	30°	45° Chamfer	Hex. 1,27
40.316.005.02-2	1,6	20 N-cm	8,2	3,03	6,25	-	2	2,33	straight	-	45° Chamfer	Hex. 1,27
40.316.005.04-2	1,6	20 N-cm	10,5	2,9	8,15	8,4	2,1	2,1	conical	45°	45° Chamfer	Hex. 1,27

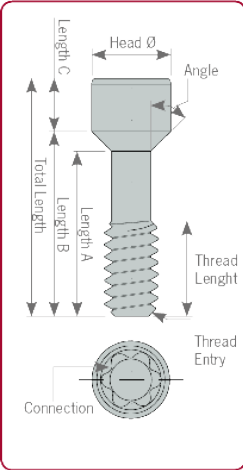
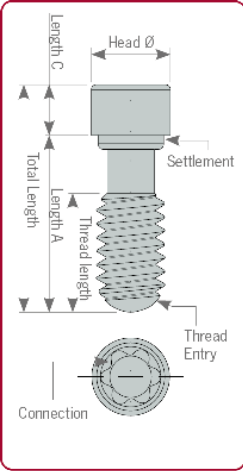


REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
40.316.005.05-2	1,6	20 N-cm	7,6	2,7	5,21	5,5	2,1	2,1	conical	60°	45° Chamfer	Hex. 1,27
40.316.005.06-2	1,6	20 N-cm	3,6	1,8	2,2	-	1,4	2,1	straight	-	45° Chamfer	Hex. 1,27
40.316.005.07-2	1,6	20 N-cm	8,8	2,85	6,73	6,9	1,9	2,15	conical	60	45° Chamfer	Hex. 1,27
40.316.005.08-2	1,6	20 N-cm	9	3,9	0	6,9	2,1	2,18	conical	45°	45° Chamfer	Hex. 1,27
40.316.0 07.01-2	1,6	20 N-cm	7,9	2	5,72	6,9	2,18	2,18	conical	15°	45° Chamfer	Torx T6
40.316.008.01-2	1,6	20 N-cm	7	2,7	5,15	-	1,8	2,3	straight	-	45° Chamfer	Unigrip
40.316.008.02-2	1,6	20 N-cm	7,3	2,7	5,15	5,9	1,4	2,2	conical	35°	45° Chamfer	Unigrip
40.316.012.01-2	1,6	20 N-cm	8	2,65	5,53	6	2	2,15	conical	45°	45° Chamfer	Star 1,50
40.316.014.01-2	1,6	20 N-cm	7,9	2,3	5,42	6,46	1,44	2,2	conical	20°	45° Chamfer	Hex. 1,19
40.317.002.01-2	N1-72	25 N-cm	8,17	3	5,31	5,87	2,3	2,4	conical	45°	45° Chamfer	Sq. 1,30
40.317.004.01-2	N1-72	25 N-cm	7,6	2,8	5,6	5,76	1,84	2,3	conical	70°	45° Chamfer	Hex. 1,27
40.317.004.02-2	N1-72	25 N-cm	7,52	2,2	5,12	5,773	1,75	2,1	conical	30°	45° Chamfer	Hex. 1,25
40.317.005.01-2	N1-72	25 N-cm	7,6	2,5	5,19	5,42	2,18	2,2	conical	60°	45° Chamfer	Hex. 1,27
40.317.005.02-2	N1-72	25 N-cm	7,2	2,4	4,73	5,25	1,95	2,4	conical	45°	45° Chamfer	Hex. 1,27
40.318.002.01-2	1,8	25 N-cm	7	3,2	5,2	-	1,8	2,5	straight	-	45° Chamfer	Sq. 1,30
40.318.002.02-2	1,8	25 N-cm	8,3	2,6	6,6	-	1,7	2,45	straight	-	45° Chamfer	Sq. 1,30
40.318.003.01-2	1,8	25 N-cm	6,8	3,3	5,2	-	1,6	2,3	straight	-	45° Chamfer	Hex. 1,20
40.318.003.02-2	1,8	25 N-cm	8	3,6	6	-	2	2,1	straight	-	45° Chamfer	Hex. 1,20
40.318.004.01-2	1,8	25 N-cm	7,2	4,47	2,3	6,2	1	2,4	conical	30°	45° Chamfer	Hex. 1,25
40.318.004.02-2	1,8	25 N-cm	9,8	5,094	8,3	8,8	1	2,4	conical	30°	45° Chamfer	Hex. 1,25
40.318.004.03-2	1,8	25 N-cm	7,65	3,3	5,17	5,75	1,9	2,4	conical	35°	45° Chamfer	Hex. 1,25
40.318.005.01-2	1,8	25 N-cm	4,5	2,3	2,8	2,9	1,6	2,35	conical	70°	45° Chamfer	Hex. 1,27
40.318.005.02-2	1,8	25 N-cm	7,6	3,8	5,8	6,05	1,55	2,35	conical	50°	45° Chamfer	Hex. 1,27
40.318.006.01-2	1,8	25 N-cm	6	3,18	3,5	3,85	2,15	2,4	conical	45°	45° Chamfer	Hex. 1,50
40.318.007.01-2	1,8	25 N-cm	9,1	4,25	7,22	7,45	1,65	2,18	conical	60°	45° Chamfer	Torx T6
40.318.008.01-2	1,8	25 N-cm	8,3	2,5	6,5	-	1,8	2,45	straight	-	45° Chamfer	Unigrip



STRAIGHT SCREWS TECHNICAL SPECIFICATIONS

REFERENCE	METRIC	TORQUE	TOTAL LENGTH	THREAD LENGTH	A LENGTH	B LENGTH	C LENGTH	HEAD DIAMETER	SEAT	ANGLE	THREAD ENTRY	CONNECTION
40.318.012.01-2	1,8	25 N-cm	7,25	2,4	4,93	5,25	2	2,15	conical	45°	45° Chamfer	Sq. 1,50
40.318.012.02-2	1,8	25 N-cm	8	2,6	5,68	6	2	2,15	conical	45°	45° Chamfer	Sq. 1,50
40.318.013.01-2	1,8	25 N-cm	8	2,5	6,01	6,7	1,3	2,2	conical	30°	45° Chamfer	Hex. 1,00
40.320.002.01-2	2	30 N-cm	5	3,06	3,26	3,5	1,5	2,49	conical	45°	45° Chamfer	Sq. 1,30
40.320.002.02-2	2	30 N-cm	7,45	3	5,7	5,9	1,5	2,4	conical	45°	45° Chamfer	Sq. 1,30
40.320.002.03-2	2	30 N-cm	10,2	3,15	8,4	-	1,8	2,45	straight	-	45° Chamfer	Sq. 1,30
40.320.003.01-2	2	30 N-cm	4,7	2,7	3,33	-	1,37	2,35	straight	-	45° Chamfer	Hex. 1,20
40.320.003.02-2	2	30 N-cm	7	3,25	5	-	2	2,4	straight	-	45° Chamfer	Hex. 1,20
40.320.003.03-2	2	30 N-cm	7,9	3,7	5,55	6,05	1,85	2,4	conical	45°	45° Chamfer	Hex. 1,20
40.320.003.04-2	2	30 N-cm	8,4	2,75	5,68	6,35	2,05	2,3	conical	45°	45° Chamfer	Hex. 1,20
40.320.003.05-2	2	30 N-cm	4,8	3,3	3,65	3,9	0,9	2,45	conical	45°	45° Chamfer	Hex. 1,20
40.320.005.01-2	2	30 N-cm	7,6	3,7	6	-	1,6	2,4	straight	-	45° Chamfer	Hex. 1,27
40.320.005.02-2	2	30 N-cm	10,3	4	8,3	-	2	2,45	straight	-	45° Chamfer	Hex. 1,27
40.320.005.03-2	2	30 N-cm	10,3	3,5	8,3	-	2	2,33	straight	-	45° Chamfer	Hex. 1,27
40.320.005.04-2	2	30 N-cm	10,5	3,06	8,15	8,4	2,1	2,5	conical	45°	45° Chamfer	Hex. 1,27
40.320.007.01-2	2	30 N-cm	6,7	2,25	3,59	5,7	1	2,58	conical	15°	45° Chamfer	Torx T6
40.320.007.02-2	2	30 N-cm	7,4	3,3	6	-	1,4	2,3	straight	-	Semi-sphere	Torx T6
40.320.007.03-2	2	30 N-cm	7,6	3	6,1	6,3	1,3	2,4	conical	45°	Semi-sphere	Torx T6
40.320.007.04-2	2	30 N-cm	4,5	2,96	3,21	3,5	1	2,45	conical	45°	45° Chamfer	Torx T6
40.320.008.01-2	2	30 N-cm	7	3,25	5	-	2	2,4	straight	-	45° Chamfer	Unigrip
40.320.008.02-2	2	30 N-cm	7,3	3	5,8	6,2	1,1	2,5	conical	35°	45° Chamfer	Unigrip
40.320.008.03-2	2	30 N-cm	10	3,6	8,5	-	1,5	2,45	straight	-	45° Chamfer	Unigrip
40.325.002.01-2	2,5	30 N-cm	7,41	3,5	4,75	5,29	2,12	2,87	conical	45°	Semi-sphere	Sq . 1,30
40.325.008.01-2	2,5	30 N-cm	7	2,8	5,6	-	1,4	3,4	straight	-	45° Chamfer	Unigrip

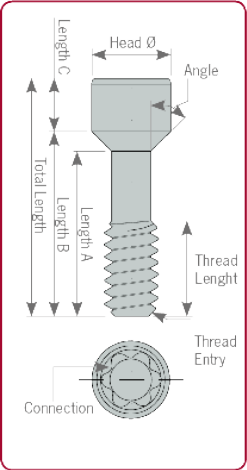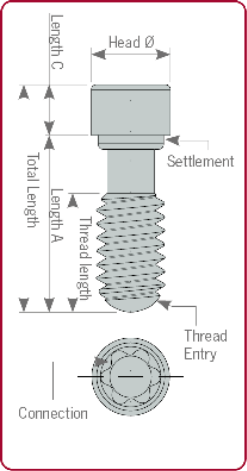

SCREWDRIVERS & STRAIGHT SCREWS

Screwdrivers



REF: 43.601.103.02-2
Hex 1.20mm



REF: 43.625.105.01-2
Hex. 1.27mm



REF: 43.601.102.01-2
Squa. 1.30mm



REF: 43.601.108.01-2
Unigrip



REF: 43.601.104.01-2
Hex 1.25mm



REF: 43.601.107.01-2
Torx T6


Straight screws cover all the thread metrics available on the market. We have several lengths for each metric to make the adaptation to the milled structures easier. Made of Titanium grade V.




Straight Screws

DYNAMIC SYSTEM SCANBODIES AND COLORS
ACCORDING TO COMPATIBILITY

CONNECTION	LIBRARY CODE	SCANBODY TYPE	MIDDLE PIECE	MAGNET SCREW
Branemark RP	0024	HA	N/A	
Zimmer NP	0040			
NB Active RP	0022			
Biomet 3i Certain RP	0002			
Osstem TS RP	0030			
Astra Evolution 4,2	0007			
MIS C1 RP	0017			
S&M Outlink 4,10	0064		N/A	
Biomet 3i Certain WP	0057			
GH 3 Neodent GM	0186			
Zimmer RP	0041	HB		
Astra Lilac	0005			
Bego S/RI 4,5	0052			
Astra Evolution 4,8	0091			
MIS C1 WP	0018			
Branemark NP	0023	HC	N/A	
Astra Aqua	0004			
NB Active NP	0021			
Biomet 3i Certain NP	0001			
Osstem TS NP	0029			
Klockner Vega RV	0083			
Xive S 3,4	0038			
GH 3 Straumann BLX RB	0207			
GH 3 Straumann BLX WB	0208			
Biomet 3i Osseotite NP	0003	HD	N/A	
Megagen AnyRidge RP	0015			
S&M Premium Khono 3,30	0031			
SIC SICACE 3,3	0170			




CONNECTION	LIBRARY CODE	SCANBODY TYPE	MIDDLE PIECE	MAGNET SCREW
Astra Evolution 3,6	0006	HE		
MIS M4 NP	0019			
Klockner Vega NV	0082			
S&M Outlink 3,30	0063			
Keystone Prima NP	0044			
Ankylos	0075			
GH 3 SGS Dental CC	0225			
GH 3 Paltop Advanced +	0229			
Straumann Bone Level NP	0033	SA		
MIS C1 NP	0016	SB		
Straumann Bone Level RP	0035			
NB Replace 3,5	0026	TA		
Camlog Screw-Line 3,8	0011			
Conelog Screw-Line 3,8	0120			
NB Replace 4,3	0027	TB		
Camlog Screw-Line 4,3	0012			
NB Replace 5,0	0028			
Conelog Screw-Line 4,3	0121			
Camlog Screw-Line 5,0	0088			
Camlog Screw-Line 6,0	0088			
Straumann Synocta 4,8	0074	OA	N/A	
Straumann Oct. Interno 4,8	0037			
Straumann Oct. Interno 6,5	0096			
Multi Unit RP	0025	MA	N/A	
NB Multi Unit RP	0025	MB	N/A	
MIS Multi Unit St	0020		N/A	
Anthogyr Multi-Unit 4,8	0163		N/A	
Lasak Multi-Unit QN/QR	0168		N/A	
Zimmer Tapered Screw-Vent	0205		N/A	
Paltop MU	0181		N/A	




DYNAMIC SYSTEM SCANBODIES AND COLORS
ACCORDING TO COMPATIBILITY

CONNECTION	LIBRARY CODE	SCANBODY TYPE	MIDDLE PIECE	MAGNET SCREW
Astra Evolution Uni-Abutment	0008	HF	N/A	
BTI External NP	0009	HG	N/A	
Xive S 3,8	0039			
Bego Mini	0187		N/A	
BTI Internal RP	0010	SC		
BTI Internal WP				
Bego RS/RSX 3	0049	HH		
Bego S/RI 3,25-3,75	0050	HI		
Medentis ICX-Templant 4,1	0125			
Xive S 4,5	0085			
Alphabio Conical Std. Conn.	0169			
Lasak Bioniq QR	0167			
SIC SICACE 4,2	0171			
Bredent SKY NP	0110			
Bredent SKY RP				
Bego S/RI 4,1	0051	HJ		
Biomet 3i Osseotite WP	0058		N/A	
Keystone Prima RP	0045			
Klockner Essential Cone 4,5	0054	OB		
S&M Premium Khono 3,80	0032	OH		
S&M Premium Khono 4,25	0065	HL		
BTI External WP	0060	HM	N/A	
BTI Multi-IM Universal	0151	HN	N/A	
Neoss 3,4	0047			
Neoss 4,1				
Zimmer WP	0080	HO		
NB Branemark WP	0061	HP	N/A	
NB Active WP	0124			
Keystone Prima WP	0046			




CONNECTION	LIBRARY CODE	SCANBODY TYPE	MIDDLE PIECE	MAGNET SCREW
Bego S/RI 5,5	0081	HR		
Dentaurum Tiologic S	0130	PA		
Dentaurum Tiologic M	0131			
Dentaurum Tiologic L	0132			
Astra Evolution 3,0	0090	HS		
Astra Yellow	0109			
NB Active 3,0	0159			
Alphabio Conical Hex. Conn.	0136			
Biotech Dental Kontakt XNP	0164			
Biohorizons 3,0	0102			
Lasak Bioniq QN	0166			
DIO UF NP	0014			
Adin Touareg/Closefit NP	0145			
Adin Touareg/Closefit UNP	0188			
GH 3 SGS Dental Narrow CC	0226			
Astra Evolution 5,4	0092	HT		
NB Replace 6,0	0129	TC		
Straumann Synocta 3,5	0160	SD		
GH 3 Straumann Bone Level 2,9	0235			
Anthogyr Axiom REG/PX XNP	0161	TD		
Anthogyr Axiom REG/PX RP				
Anthogyr Axiom REG/PX WP				
Biotech Dental Kontakt RP	0165			
Camlog Screw-Line 3,3	0087			
Conelog Screw-Line 3,3	0119			
Str. Screw-Retained NC/RC	0101	DA	N/A	
Straumann Synocta 6,5	0137	OC	N/A	
Bego Multi-Plus	0150	MC	N/A	
Ankylos Balance Base	0183	MD	N/A	



MAIN COMPATIBILITY	REFERENCE	CUTTING DIAMETER	SEAT	CUTTING LENGTH	USEFUL LENGTH (max. drilling depth)	STEM CUTTING DIAMETER	SUPPORT DIAMETER (SHANK)	TOTAL LENGTH
		Øc	α	Lc	Lu	Øv	Øs	Lt
BEGO RS/RSX 3* ASTRA EVOLUTION 3.0* *Only for titanium and soft materials	33.325.472.01-2	1,4	25	0,4	4,7	0,5	3	50
	33.425.472.01-2	1,4	25	0,4	4,7	0,5	4	50
	33.625.472.01-2	1,4	25	0,4	4,7	0,5	6	50
STRAUMANN BONE LEVEL NP STRAUMANN BONE LEVEL RP MEDEDENTIS ICX TEMPLANT 4,1 STRAUMANN SYNOCTA 3.5	33.315.804.01-2	1,6	15	0,7	8	0,65	3	50
	33.415.804.01-2	1,6	15	0,7	8	0,65	4	50
	33.615.804.01-2	1,6	15	0,7	8	0,65	6	50
ANTHOGYR AXIOM RG/PX XNP ANTHOGYR AXIOM RG/PX RP ANTHOGYR AXIOM RG/PX WP	33.320.704.01-2	1,6	20	0,7	7	0,8	3	50
	33.420.704.01-2	1,6	20	0,7	7	0,8	4	50
	33.620.704.01-2	1,6	20	0,7	7	0,8	6	50
ASTRA EVOLUTION 3.6 ANKYLOS ALPHABIO CONICAL STANDARD CONNECTION LASAK BIONIQ QR NEODENT GM ANKYLOS BALANCE BASE	33.330.734.01-2	1,6	30	0,7	7,3	0,8	3	50
	33.430.734.01-2	1,6	30	0,7	7,3	0,8	4	50
	33.630.734.01-2	1,6	30	0,7	7,3	0,8	6	50
NOBEL BIO CARE ACTIVE NP NOBEL BIO CARE ACTIVE 3.0 LASAK BIONIQ QN	33.335.754.01-2	1,6	35	0,7	7,5	0,65	3	50
	33.435.754.01-2	1,6	35	0,7	7,5	0,65	4	50
	33.635.754.01-2	1,6	35	0,7	7,5	0,65	6	50
OSSTEM TS NP CAMLOG SCREW LINE 3.8 NP CAMLOG SCREW LINE 4.3 RP KLOCKNER VEGA NV XIVE S 3,4 BIOTECH DENTAL KONTAKT XNP BIOTECH DENTAL KONTAKT RP DIO UF NP CAMLOG SCREW-LINE 3,3	33.345.804.01-2	1,6	45	0,7	8	0,65	3	50
	33.445.804.01-2	1,6	45	0,7	8	0,65	4	50
	33.645.804.01-2	1,6	45	0,7	8	0,65	6	50
MIS C1 NP MIS M4 NP CONELOG 3,8 CONELOG 4,3 ASTRA YELLOW ALPHABIO CONICAL HEX CONNECTION	33.360.754.01-2	1,6	60	0,7	7,5	0,65	3	50
	33.460.754.01-2	1,6	60	0,7	7,5	0,65	4	50
	33.660.754.01-2	1,6	60	0,7	7,5	0,65	6	50
BIOMET 3i CERTAIN NP ASTRA AQUA	33.390.754.01-2	1,6	90	0,7	7,5	0,65	3	50
	33.490.754.01-2	1,6	90	0,7	7,5	0,65	4	50
	33.690.754.01-2	1,6	90	0,7	7,5	0,65	6	50
ASTRA EVOLUTION 4.2	33.350.775.01-2	1,7	50	0,7	7,7	0,8	3	50
	33.450.775.01-2	1,7	50	0,7	7,7	0,8	4	50
	33.650.775.01-2	1,7	50	0,7	7,7	0,8	6	50
BIOMET 3i CERTAIN RP NOBEL BIO CARE BRANEMARK NP NOBEL BIO CARE REPLACE NP MEGAGEN ANYRIDGE RP BIOMET 3i CERTAIN WP	33.390.805.01-2	1,7	90	0,7	8	0,65	3	50
	33.490.805.01-2	1,7	90	0,7	8	0,65	4	50
	33.690.805.01-2	1,7	90	0,7	8	0,65	6	50
BEGO S/RI 3.25-3.75 BEGO S/RI 4.1 BEGO S/RI 4.5 BEGO S/RI 5,50 STRAUMANN SCREW-RETAINED NC/RC BEGO MULTIPLUS	33.335.676.01-2	1,8	35	1	6,7	0,9	3	50
	33.435.676.01-2	1,8	35	1	6,7	0,9	4	50
	33.635.676.01-2	1,8	35	1	6,7	0,9	6	50

DYNAMIC MILLING TOOL SPECIFICATIONS

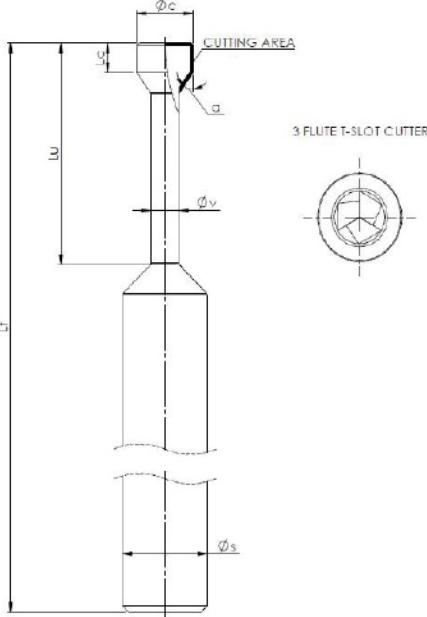

MAIN COMPATIBILITY	REFERENCE	CUTTING DIAMETER	SEAT	CUTTING LENGTH	USEFUL LENGTH (max. drilling depth)	STEM CUTTING DIAMETER	SUPPORT DIAMETER (SHANK)	TOTAL LENGTH
		Øc	α	Lc	Lu	Øv	Øs	Lt
KLOCKNER ESSENTIAL CONE 4.5 DIRECTO IMPLANTE KLOCKNER ESSENTIAL CONE 4.5 OCTACONE 12° KLOCKNER ESSENTIAL CONE 4.5 OCTACONE 25° KLOCKNER VEGA RV XIVE S 3,8 XIVE S 4,5 BIOHORIZONS 3.0 STRAUMANN SYNOCTA 6,5 STRAUMANN BLX RB STRAUMANN BLX WB	33.345.856.01-2	1,8	45	1	8,5	0,9	3	50
	33.445.856.01-2	1,8	45	1	8,5	0,9	4	50
	33.645.856.01-2	1,8	45	1	8,5	0,9	6	50
MIS C1 RP PALTOP UNIVERSAL MULTI UNIT MIS C1 WP S&M PREMIUM KHONO 3,3 S&M PREMIUM KHONO 3,8 S&M OUTLINK 3,3 S&M OUTLINK 4,1 S&M PREMIUM KHONO 4,25 BREDENT SKY NP BREDENT SKY RP ADIN TOUAREG/CLOSERT NP ADIN TOUAREG/CLOSERT UNP	33.360.756.01-2	1,8	60	1	7,5	0,9	3	50
	33.460.756.01-2	1,8	60	1	7,5	0,9	4	50
	33.660.756.01-2	1,8	60	1	7,5	0,9	6	50
ZIMMER SCREW-VENT 3.5 ZIMMER SCREW-VENT 4.5 ASTRA EVOLUTION UNIT ABUTMENT ZIMMER TYPE 5,7	33.370.716.01-2	1,8	70	1	7,1	0,9	3	50
	33.470.716.01-2	1,8	70	1	7,1	0,9	4	50
	33.670.716.01-2	1,8	70	1	7,1	0,9	6	50
NOBEL BIO CARE BRANEMARK RP NOBEL BIO CARE MULTI-UNIT RP BIOMET 3i OSSEOTITE NP BTI EXTERNAL CONNECTION NP BTI INTERNAL CONNECTION RP MIS MULTI-UNIT ST KEYSTONE PRIMA NP KEYSTONE PRIMA RP KEYSTONE PRIMA WP NEOSS PROACTIVE 3,4 NEOSS PROACTIVE 4,1 BIOMET 3i OSSEOTITE WP BTI EXTERNAL CONNECTION WP BTI MULTIM UNIVERSAL RP ANTHOGYRD MULTI-UNIT 4.8 BEGO MINI BTI INTERNAL WP LASAK MULTI-UNIT QN/QR SIC SICACE 3,3 SIC SICACE 4,2	33.390.716.01-2	1,8	90	1	7,1	0,9	3	50
	33.490.716.01-2	1,8	90	1	7,1	0,9	4	50
	33.690.716.01-2	1,8	90	1	7,1	0,9	6	50
STRAUMANN INTERNAL OCTAGON RP STRAUMANN INTERNAL OCTAGON 6,5	33.315.708.01-2	2	15	1	7	1	3	50
	33.415.708.01-2	2	15	1	7	1	4	50
	33.615.708.01-2	2	15	1	7	1	6	50
STRAUMANN SYNOCTA RP	33.330.708.01-2	2	30	1	7	1	3	50
	33.430.708.01-2	2	30	1	7	1	4	50
	33.630.708.01-2	2	30	1	7	1	6	50
NOBEL BIO CARE ACTIVE RP NOBEL BIO CARE ACTIVE WP	33.335.758.01-2	2	35	1	7,5	1	3	50
	33.435.758.01-2	2	35	1	7,5	1	4	50
	33.635.758.01-2	2	35	1	7,5	1	6	50
OSSTEM TS RP CAMLOG SCREW-LINE 5,0 CAMLOG SCREW-LINE 6,0	33.345.808.01-2	2	45	1	8	1	3	50
	33.445.808.01-2	2	45	1	8	1	4	50
	33.645.808.01-2	2	45	1	8	1	6	50
NOBEL BIO CARE REPLACE RP ASTRA LILAC NOBEL BIO CARE REPLACE WP ASTRA EVOLUTION 4.8 NOBEL BIO CARE BRANEMARK WP ASTRA EVOLUTION 5.4 NOBEL BIO CARE REPLACE 6.0	33.390.958.01-2	2	90	1	9,5	1	3	50
	33.490.958.01-2	2	90	1	9,5	1	4	50
	33.690.958.01-2	2	90	1	9,5	1	6	50

Reference code:

Cutting seat Cutting diameter
code
33.445.804.01-2
Shank Useful length



DMTONE
DYNAMIC MILLING TOOL

SCREWDRIVER ADAPTOR



Screwdriver for the Dynamic µScanbody System

Ref. 43.621.410.01-2
Screwdriver with manual handle
Standard length: 21mm



Ref. 43.624.410.01-2
Contra-angle
Length: 24mm



Ref. 43.630.410.01-2
Contra-angle
Length: 30mm



Ref. 43.621.415.01-2
Tiny
Screwdriver with manual handle
Length: 21mm



Ref. 43.620.411.01-2
Multi Unit
Contra-angle
Length: 20 mm



COMPLEMENTS



Manual handle
Made of stainless steel.
They are used to connect screwdriver bits with the contra-angle connection

Large manual handle for laboratory Ref. 49.601.000.03-2
Ideal to manipulate models in the laboratory.
Length: 55.65mm.



Manual handle for clinic
Ref. 49.601.000.01-2
Clinic handle: used to position the prosthesis in the mouth prior to torque control in the clinic.
Length: 15.65mm.



Universal manual torque wrench prosthetic
Ref. 11.990.990.07-2
Torque wrench.
4mm square connection.
Torque 10-35N.c

Manual torque wrench adapter prosthetic
Piece to connect the screwdriver with contra-angle connection to the torque wrench.



Universal Manual torque wrench adapter
Ref. 49.604.000.05-2
4mm Square connection



Straumann Manual torque wrench adapter
Ref. 49.604.000.07-2
Straumann connection



Nobel Biocare Manual torque wrench adapter
Ref. 49.604.000.08-2

IDENTIFICATION PRODUCT

The label accompanying all Dynamic Abutment® Solutions products contains all the information the user requires.
The product label contains detailed information of the contents of the blister pack.
The symbols found on the

identity labels correspond to the international product identification standards.
All products are supplied with their corresponding instructions for use which include an explanation of each of the symbols found on the product label.

Identification of compliance with the requirements of applicable EC legislation

Refer to the instructions for use

Manufactured



Product reference
Batch Number
Quantity

Content information
Extended information




Human Readable Interpretation (HRI)
Date of manufacture

Non-reusable
Do not use if packaging is damaged
Non sterile product

SECURITY & TRACEABILITY

All of our products are patented and manufactured under very strict quality guidelines.
With the 3.0 Dynamic System, we provide a card for the patient and labels for the laboratory and the clinic to identify the position in Dynamic System is located.

We exercise complete control over the traceability of our products to fulfil the current health legislation.
This helps repositioning the material and inform about the importance of using the appropriate tools when handling the Dynamic System components.



TALLADIUM GUARANTEE

TERMS AND CONDITIONS

These guarantee terms and conditions (“T&C”) cover the entire range of Talladium products (“Products”), manufactured by TALLADIUM ESPAÑA S.L. and distributed by Geoda Medical S.L. or official dealers. The guarantee described in these T&C is exclusively in benefit of the clinician (“Clinician”) and of the dental technician (“Technician”) and not for the benefit of third parties or institutions, including patients.

GUARANTEE PERIOD

TALLADIUM ESPAÑA S.L. offers a lifelong guarantee for its entire range of products starting from the date of issue of the invoice.

GUARANTEE SCOPE

Subject to the limitations and exceptions described in these T&C, TALLADIUM ESPAÑA S.L. will offer the following benefits:

QUALITY: If there are defects in the materials or in the manufacturing of the Product, TALLADIUM ESPAÑA S.L. will replace the Product with no additional cost.

SAFETY: If, having complied with all the product indications, the prosthesis should have to be made again, due to a fault in the Dynamic Abutment® or Dynamic Titanium Base® system, TALLADIUM ESPAÑA S.L. will replace the abutments and screws necessary to remake the prosthesis, as well as the costs derived from its manufacturing.

In case of having used our products and having complied with all the product indications, the implants suffer any damage, TALLADIUM ESPAÑA S.L. will pay the cost of the implants. This coverage will only be valid during the first 6 months after the collocation of the prosthesis which includes our products.

CLAIM REQUIREMENTS AND PROCEDURE

To receive the benefits indicated in these T&C, the treating Clinician must satisfy the following requirements:

- a) The claim must be notified to TALLADIUM ESPAÑA S.L. within (30) days since the date the claimed defect was detected.
- b) This requires that the Clinician or Technician must contact the customer service department by telephone or by e-mail to make the claim.
- c) A claim form will be completed, which, together with a document or report which justifies the faulty Product and the faulty Product itself, will be sent by the customer to TALLADIUM ESPAÑA S.L. offices, within the previously indicated period.
- d) Clinicians or Technicians presenting a claim in agreement with these T&C must be up to date in any payments owing to TALLADIUM ESPAÑA S.L. or to any of its subsidiaries, at the time when the claim form is presented.
- e) All the use procedures of our Products must be carried out in agreement with the instructions of TALLADIUM ESPAÑA S.L. as well as in accordance with commonly accepted dentistry practices.
- f) The expenses derived from this procedure will be assumed by the customer. The return shipping costs will be assumed by TALLADIUM ESPAÑA S.L. in all those cases covered by these T&C.

Regardless of the guarantee rights, claims should be notified as soon as possible in order to comply with regulatory requirements.

GENERAL LIMITATIONS OF THIS GUARANTEE

With the exception of the guarantee described in these T&C, neither TALLADIUM ESPAÑA S.L. nor its representatives, nor third parties manufacturing or distributing the Products, represent or offer a guarantee, agreement or any other express or implicit, oral or written, commitment, with respect to the Products (without limitation), including guarantees involved in the marketing, durability or suitability for individual uses or purposes.

In addition and within the maximum extent permitted by the relative law, TALLADIUM ESPAÑA S.L. rejects (on its own behalf, and on behalf of its representatives and third parties that manufacture or distribute Products) any responsibility with respect to any direct or indirect damage caused, which may result from or be a consequence of the design, composition of the dental prosthesis into which the Products are integrated.

GUARANTEE EXCLUSIONS

TALLADIUM ESPAÑA S.L. limits this guarantee to:

- Transformed abutments that form part of the dental prosthesis. But not the screws used to anchor them.
- Clinical screws that have been in the mouth for more than 2 years.

AMENDMENT OR SUSPENSION OF THE GUARANTEE

TALLADIUM ESPAÑA S.L. reserves the right to amend or withdraw these T&C at any time and without prior notification. Any modification or suspension shall not affect products already placed in patients.

Ed.2019-01



VIRGINIA WOOLF, 17 · 25005 · LLEIDA (SPAIN)
INTERNATIONAL +34 973 289 580
das@dynamicabutment.com

SPAIN +34 973 289 580
spain@dynamicabutment.com

www.dynamicabutment.com



DYNAMIC ABUTMENT SOLUTIONS

www.dynamicabutment.com

Virginia Woolf, 17
25005 · Lleida (Spain)

INTERNATIONAL +34 873 450 709
das@dynamicabutment.com

SPAIN +34 973 289 580
spain@dynamicabutment.com

YOUR DIGITAL DENTAL PARTNER